



AUDIO/VIDEO

All you need for the perfect
entertainment experience



CONTENTS

SIGNAL SPLITTERS & AMPLIFIERS	PAGE 03
HDMI™	PAGE 11
DISPLAYPORT™	PAGE 27
SPEAKERS	PAGE 37
STEREO/MONO	PAGE 45
DIGITAL OPTO	PAGE 59
RCA	PAGE 63
S-VIDEO	PAGE 70
SCART	PAGE 71
XLR/MICROPHONE	PAGE 72
PA (SPEAKON)	PAGE 76
DIN	PAGE 77

Please refer to order-codes when placing an order. Illustration and packaging similar.
Changes and errors excepted. Other products on request.





AUDIO/VIDEO

SIGNAL SPLITTERS & AMPLIFIERS

How do HDMI™ switches and splitters work?

HDMI™ switches and splitters are the ideal solution for seamlessly connecting multiple HDMI™ sources to displays such as televisions or monitors.

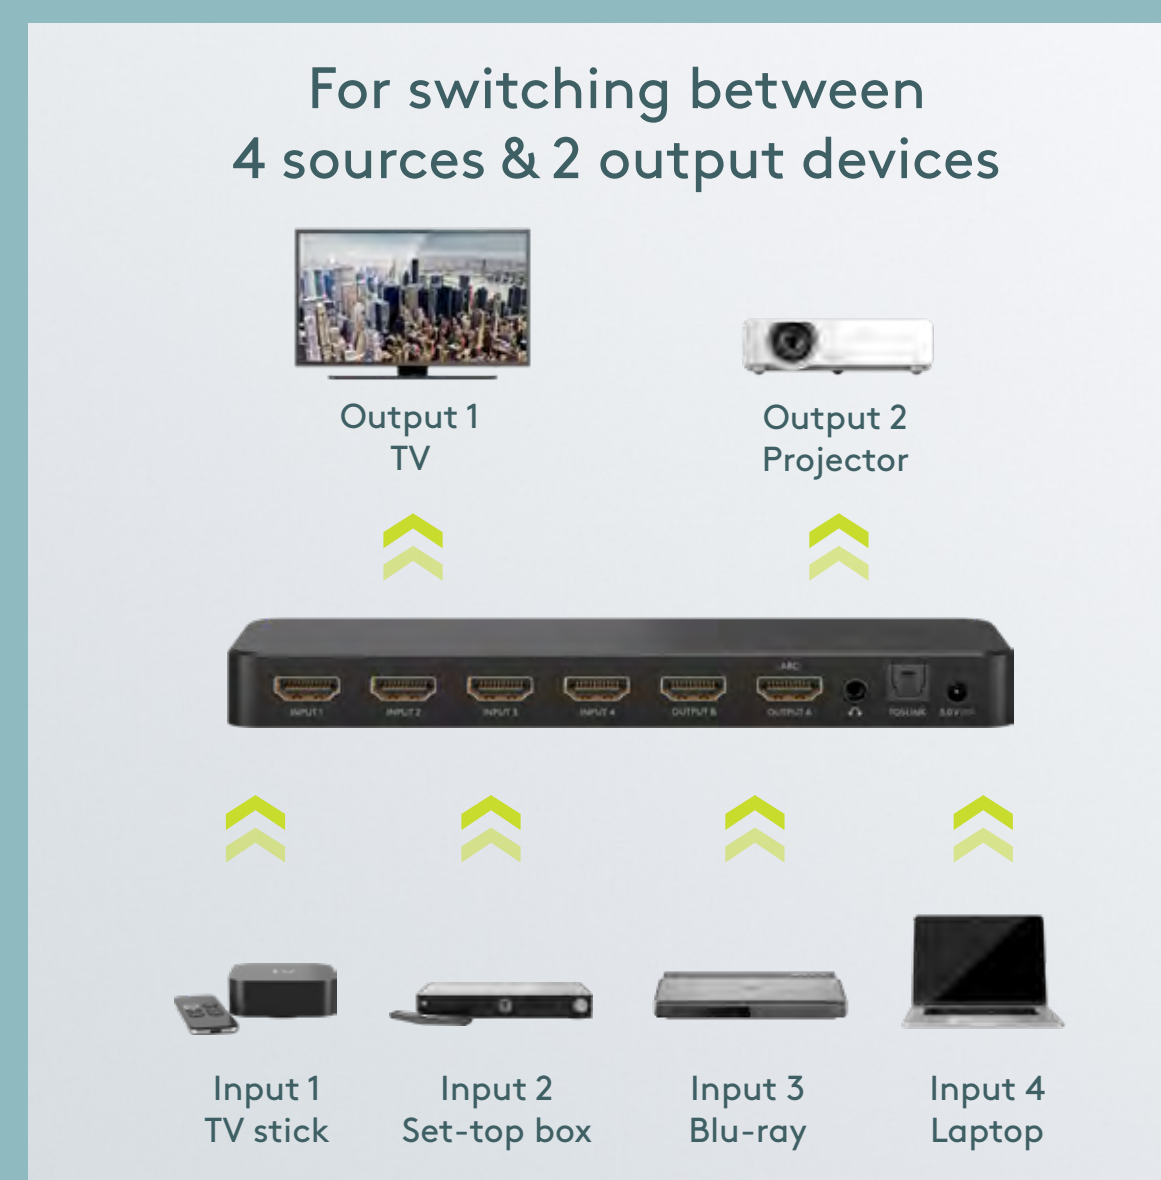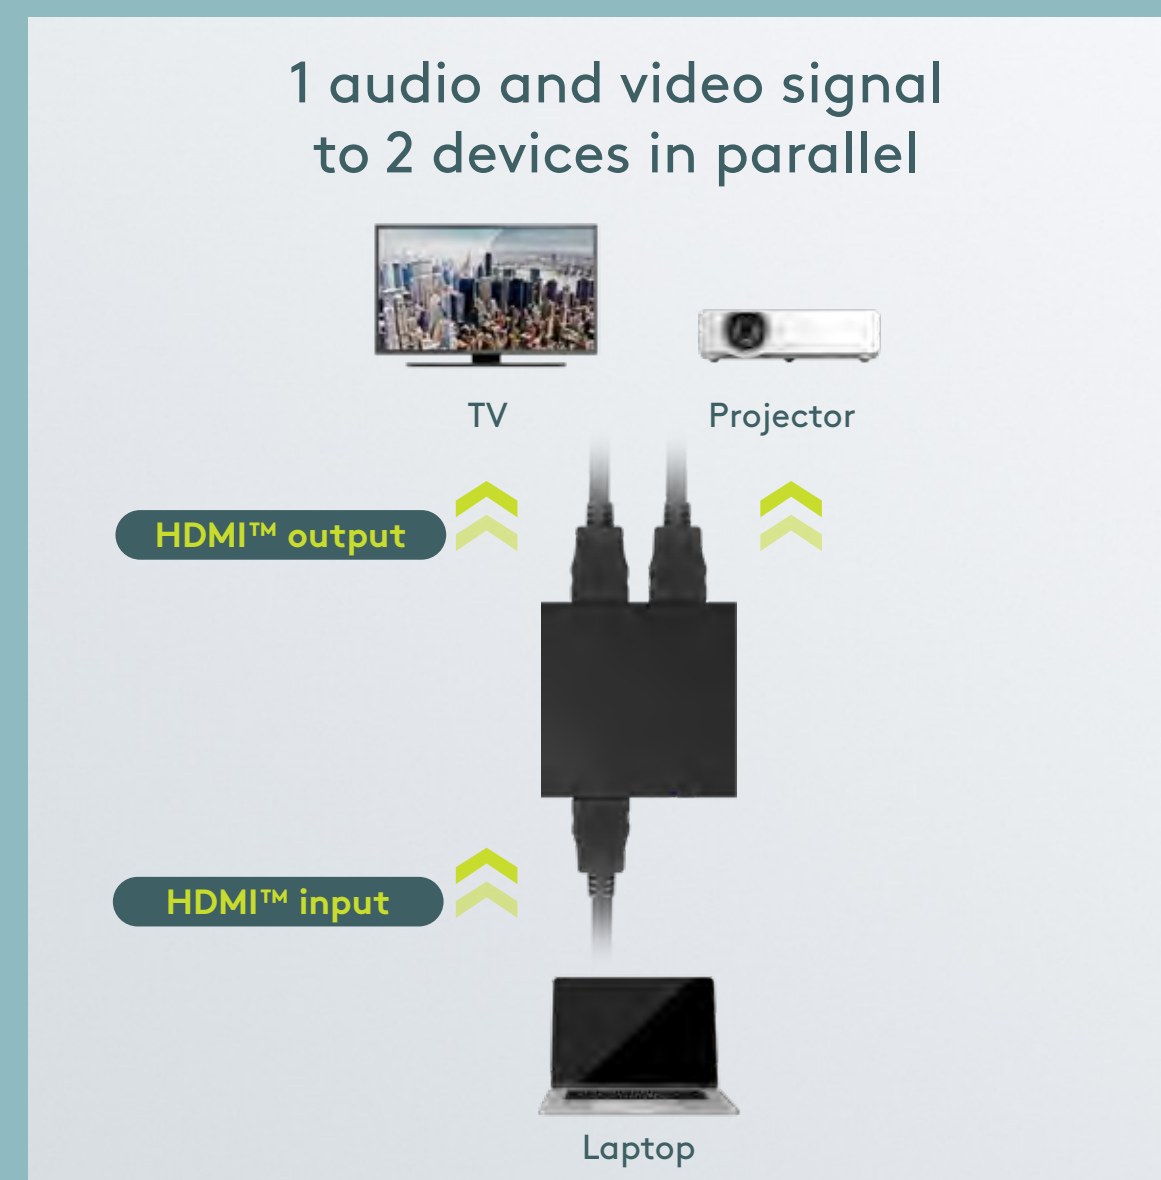

HDMI™ SWITCH

- Switches multiple input signals to a single output
- Example of use:
TVs with too few HDMI™ jacks for all source devices

HDMI™ SWITCH/SPLITTER

- Clone an HDMI™ signal and distribute it to multiple screens without loss of quality
- Example of use:
TV walls in businesses or at trade fairs

HDMI™ MATRIX SWITCH


- The combination of switch and splitter
- Can also receive multiple signals and connect to multiple screens
- Put multiple output signals on different screens and combine signals as desired for each output
- Example of use:
Simultaneously view a sports broadcast on the TV while running the game console on the beamer

Bidirectional HDMI™ Switch Boxes

Bidirectional HDMI™ switch that transmits

- 1x HDMI™ input signal to 2x HDMI™ end devices such as displays (see fig. A) or
- optionally 2x input signals to 1x end device (see fig. B)

With the switch box, you can easily switch between 2x HDMI™ sources – such as a game console or Blu-ray player – on a display, e.g. television, monitor or projector. This saves you the hassle of frequently reconnecting cables and laying an additional second HDMI™ cable to the display.

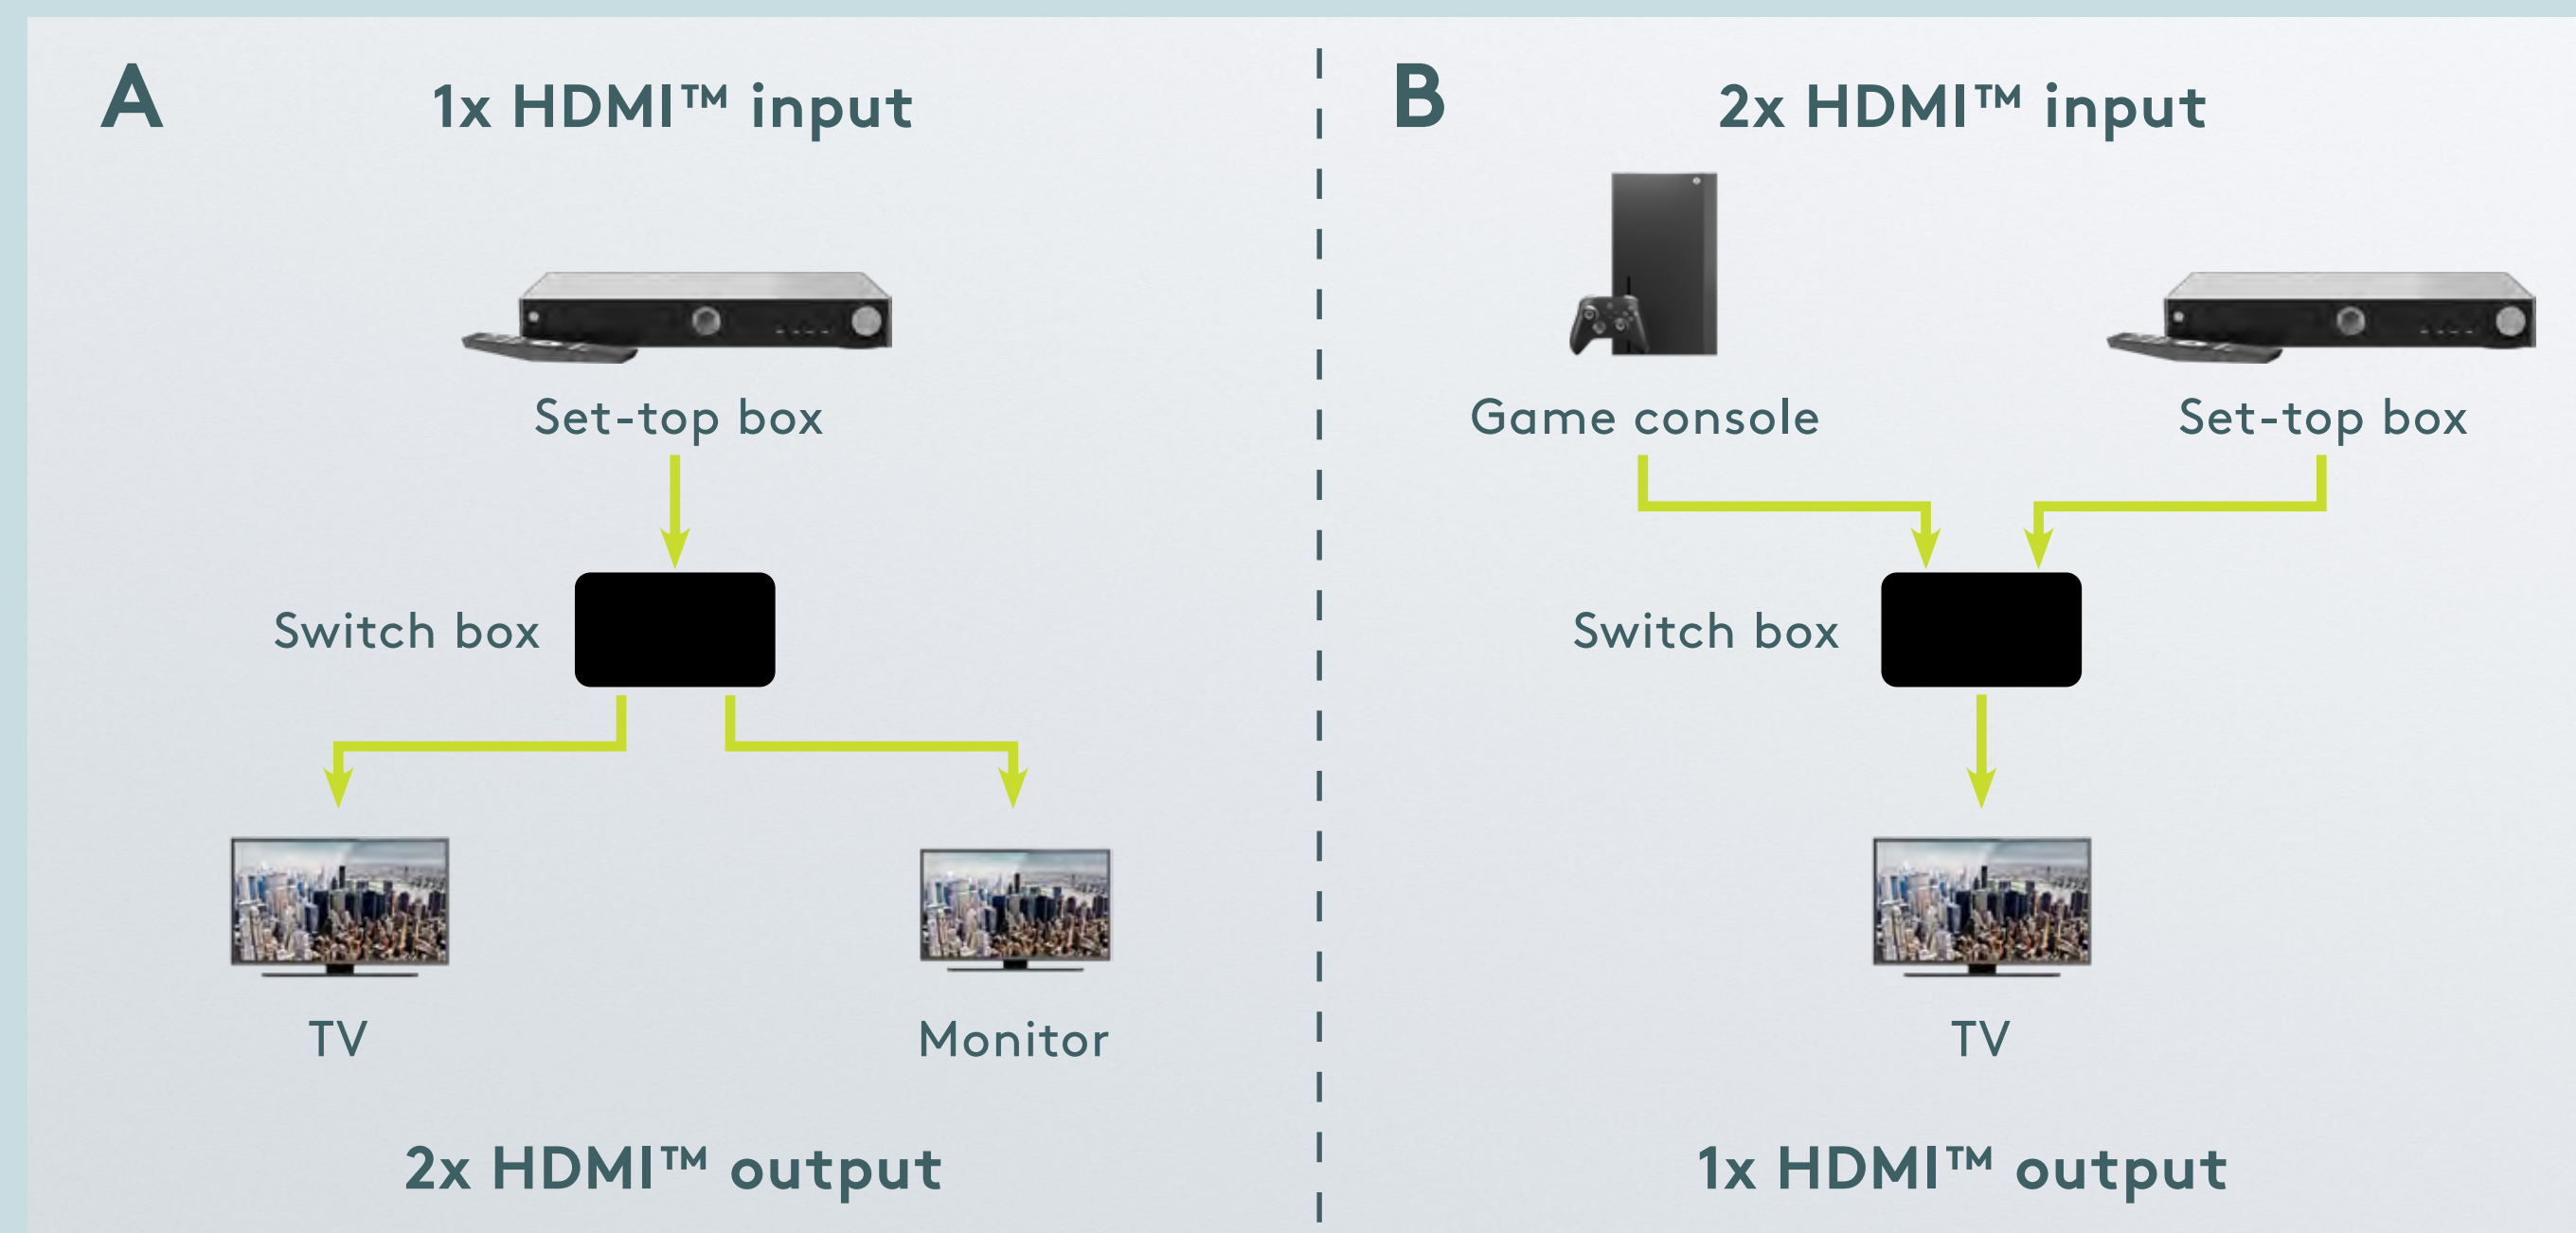


gobay®



Series 1.4 | 4K @ 30 Hz | 58485*



Series 2.1 | 8K @ 60 Hz | 77791

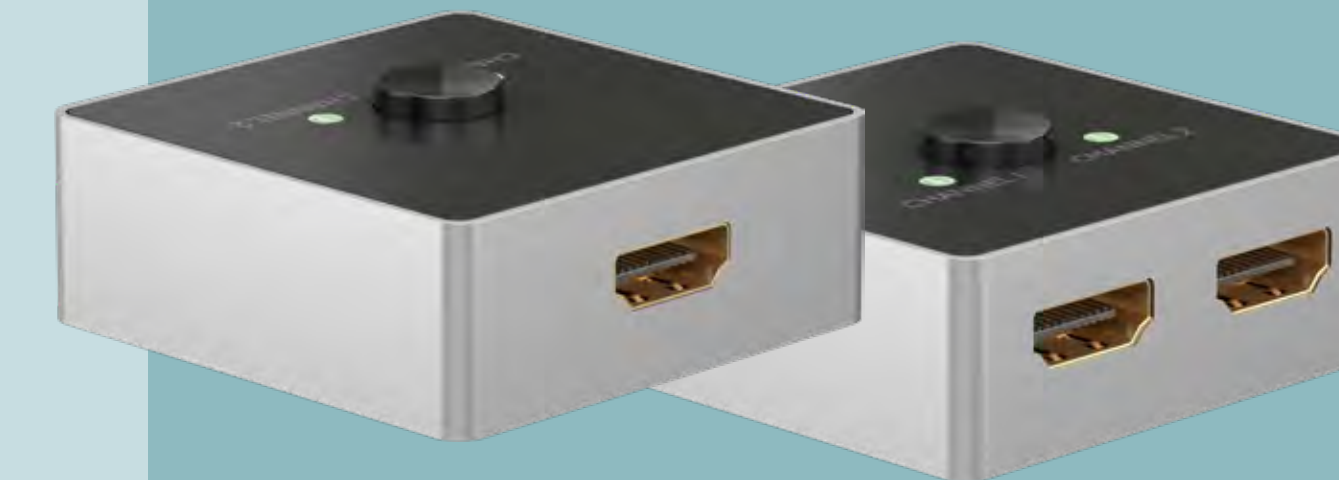

Series 2.0 | 4K @ 60 Hz | 58486*

MANUAL HDMI™ SWITCH BOX 2 TO 1

for switching between 2x HDMI™ devices connected to 1x HDMI™ display

- Pressing the button, you switch between output 1 or 2 as the output display
- By switching you both avoid reconnecting cables and protect the connections
- Suitable, for example, for connecting Blu-ray players, satellite/TV receivers, computers, tablets, game consoles such as PS4 or Xbox to televisions, monitors or projectors
- Operates without an external power supply, directly via the connected HDMI™ device

* bidirectional



HDMI™ SWITCH 3 TO 1

for switching between 3x HDMI™ devices connected to 1x HDMI™ display

- The HDMI™ switch automatically switches to the connected device when multiple HDMI™ sources are connected
- Manual toggling between port 1 to 3 via the switch on top is possible
- Powered via the connected HDMI™ device

Series 1.4 | 4K @ 30 Hz | 58487

Series 2.0 | 4K @ 60 Hz | 58488



HDMI™ SWITCH 4 TO 1

for switching between 4x HDMI™ devices connected to 1x HDMI™ display

- Conveniently switch ports via the button on the front of the HDMI™ switch box or via remote control (included)

Series 2.0 | 4K @ 60 Hz | 58489

HDMI™ SWITCH 4 TO 1 WITH AUDIO OUTPUT

for switching between 4x HDMI™ devices connected to 1x HDMI™ display with additional audio output for soundbar or hi-fi system

- Easily connect audio devices such as a hi-fi system or headphones via the 3.5 mm jack or the TOSLINK connection
- Conveniently switch ports via the button on the front of the HDMI™ switch box or via remote control (included)

Series 2.0 | 4K @ 60 Hz | 58490





Series 1.4 | 4K @ 30 Hz | 58480



Series 2.0 | 4K @ 60 Hz | 58481

HDMI™ SPLITTER 1 TO 2

duplicates 1x HDMI™ input signal to up to 2x HDMI™ outputs

- Powered via 5 V power supply unit and Micro-USB cable (both included in the scope of delivery)



Series 1.4 | 4K @ 30 Hz | 58482



Series 2.0 | 4K @ 60 Hz | 58483

HDMI™ SPLITTER 1 TO 4

duplicates 1x HDMI™ input signal to up to 4x HDMI™ outputs

- The LED display of the HDMI™ extender indicates which connections are activated
- Powered via 5 V power supply unit and Micro-USB cable (both included in the scope of delivery)



HDMI™ SPLITTER 1 TO 8

duplicates 1x HDMI™ input signal to up to 8x HDMI™ outputs

- The LED display indicates which connections are activated
- Powered via 5 V power supply unit and Micro-USB cable (both included in the scope of delivery)

Series 2.0 | 4K @ 60 Hz | 58484





TOSLINK and 3.5 mm jack support separate audio playback e.g. via hi-fi system, soundbar or headphones

Series 2.0 | 4K @ 60 Hz | 58479

HDMI™ MATRIX SWITCH 4 TO 2

for switching between 4x source devices and 2x output devices

- Connects 4x HDMI™ sources to 2x HDMI™ displays and enables separate audio playback via the S/PDIF output or the 3.5 mm jack
- Equipped with a remote control for switching comfortably between the connected units

For switching between 4x source & 2x output devices



HDMI™ AUDIO EXTRACTOR

- Extracts the audio signals from an HDMI™ source device and transmits them to a terminal device
- Converts the incoming HDMI™ digital audio signal into an analogue stereo signal for connected end devices



Series 1.4 | 4K @ 30 Hz


79138



Series 2.0 | 4K @ 60 Hz

58477



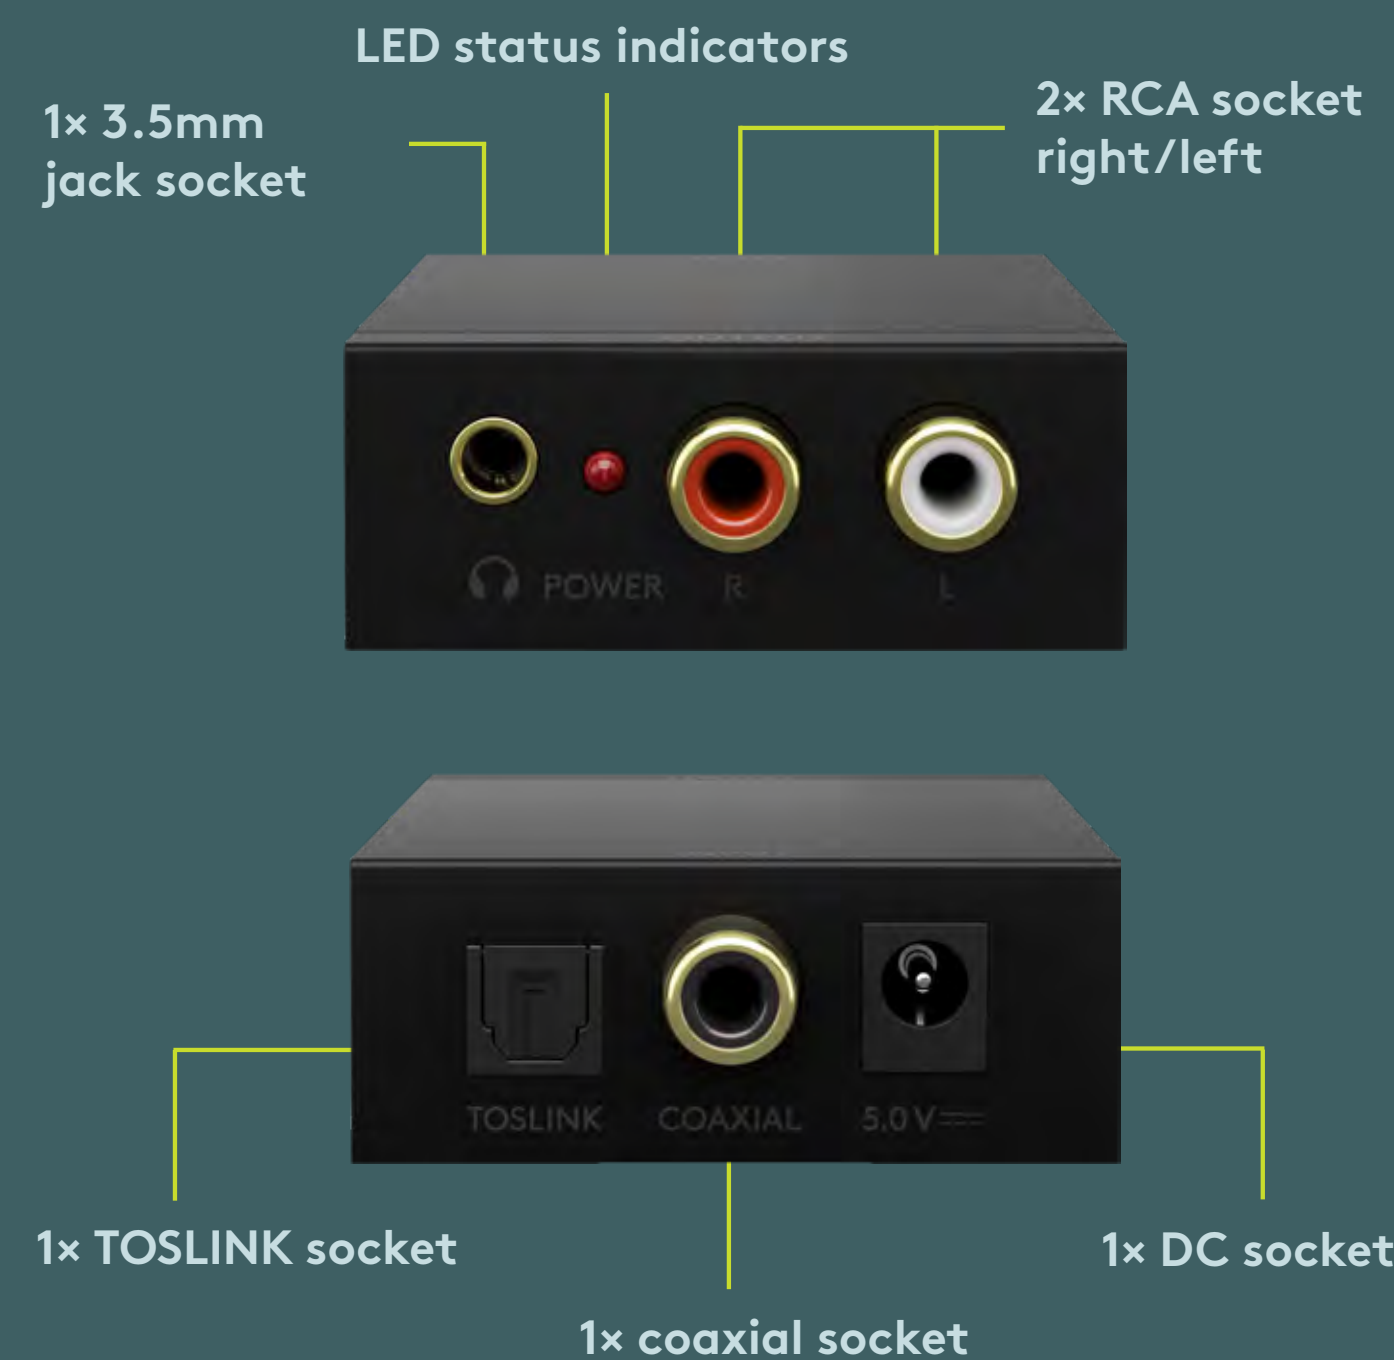

DIGITAL-TO-ANALOGUE CONVERTER

converts digital audio signals to analogue

- Transforms digital input signals from coaxial or TOSLINK connection into analogue stereo signals
- Signal output via 2x RCA sockets (audio left/right) or 1x 3.5 mm jack socket
- Converting the audio signal only works in one direction: optical to analogue, that is, digital to analogue
- Powered via a 5 V power supply unit (included in the scope of delivery)

58493

HDMI™ COUPLER WITH INTEGRATED AMPLIFIER

for extending an HDMI™ connection

- Ensures a crystal-clear picture and sound transmission even with long cable runs and effectively prevents signal interference or noise



4K @ 30 Hz

58491

- Boosts the level of weak HDMI™ signals at 4K @ 30 Hz over a distance of up to 30 m and supports 1080p 3D up to 40 m
- The passive HDMI™ signal amplifier requires no external power supply and is powered by the connected HDMI™ device

4K @ 60 Hz

58492

- Amplifies the level of weak HDMI™ signals at 4K @ 60 Hz over a distance of up to 20 m and at 4K @ 30 Hz up to over 25 m
- The active HDMI™ repeater is powered via the supplied Micro-USB cable (power supply not included)



AUDIO/VIDEO

HDMI™



ENTERTAINMENT ELECTRONICS CONNECTS

HDMI™ – short for High Definition Multimedia Interface – combines image and sound of the highest quality in a single cable. It is the most widely used connection for digital audio and video transmission.



suitable for all devices with an HDMI™ socket

DATA RATE

The data rate is the transmission speed. The faster the transmission, the greater the data flow and the better the image and sound quality. Data rates are measured in bits/s, kbit/s, Mbit/s or Gbit/s.




REFRESH RATE

A refresh rate of 200 Hz corresponds to a display of 200 frames per second. The more frames per second, the smoother the motion and the higher the image quality appears. This feature is especially beneficial for gamers and when displaying 3D content.



IMAGE FORMAT

The image format is the resolution of images or videos. The higher the resolution, the sharper the image. Common standards are VGA (640 x 480p), HD (1280 x 720p), Full HD (1920 x 1080p), 4K (3840 x 2160p), 8K (7680 x 4320p) and 16K (15360 x 8640p). Pro tip: If your television or monitor does not have an HDMI™ connection, you can easily convert the device ports using an HDMI™ adapter.

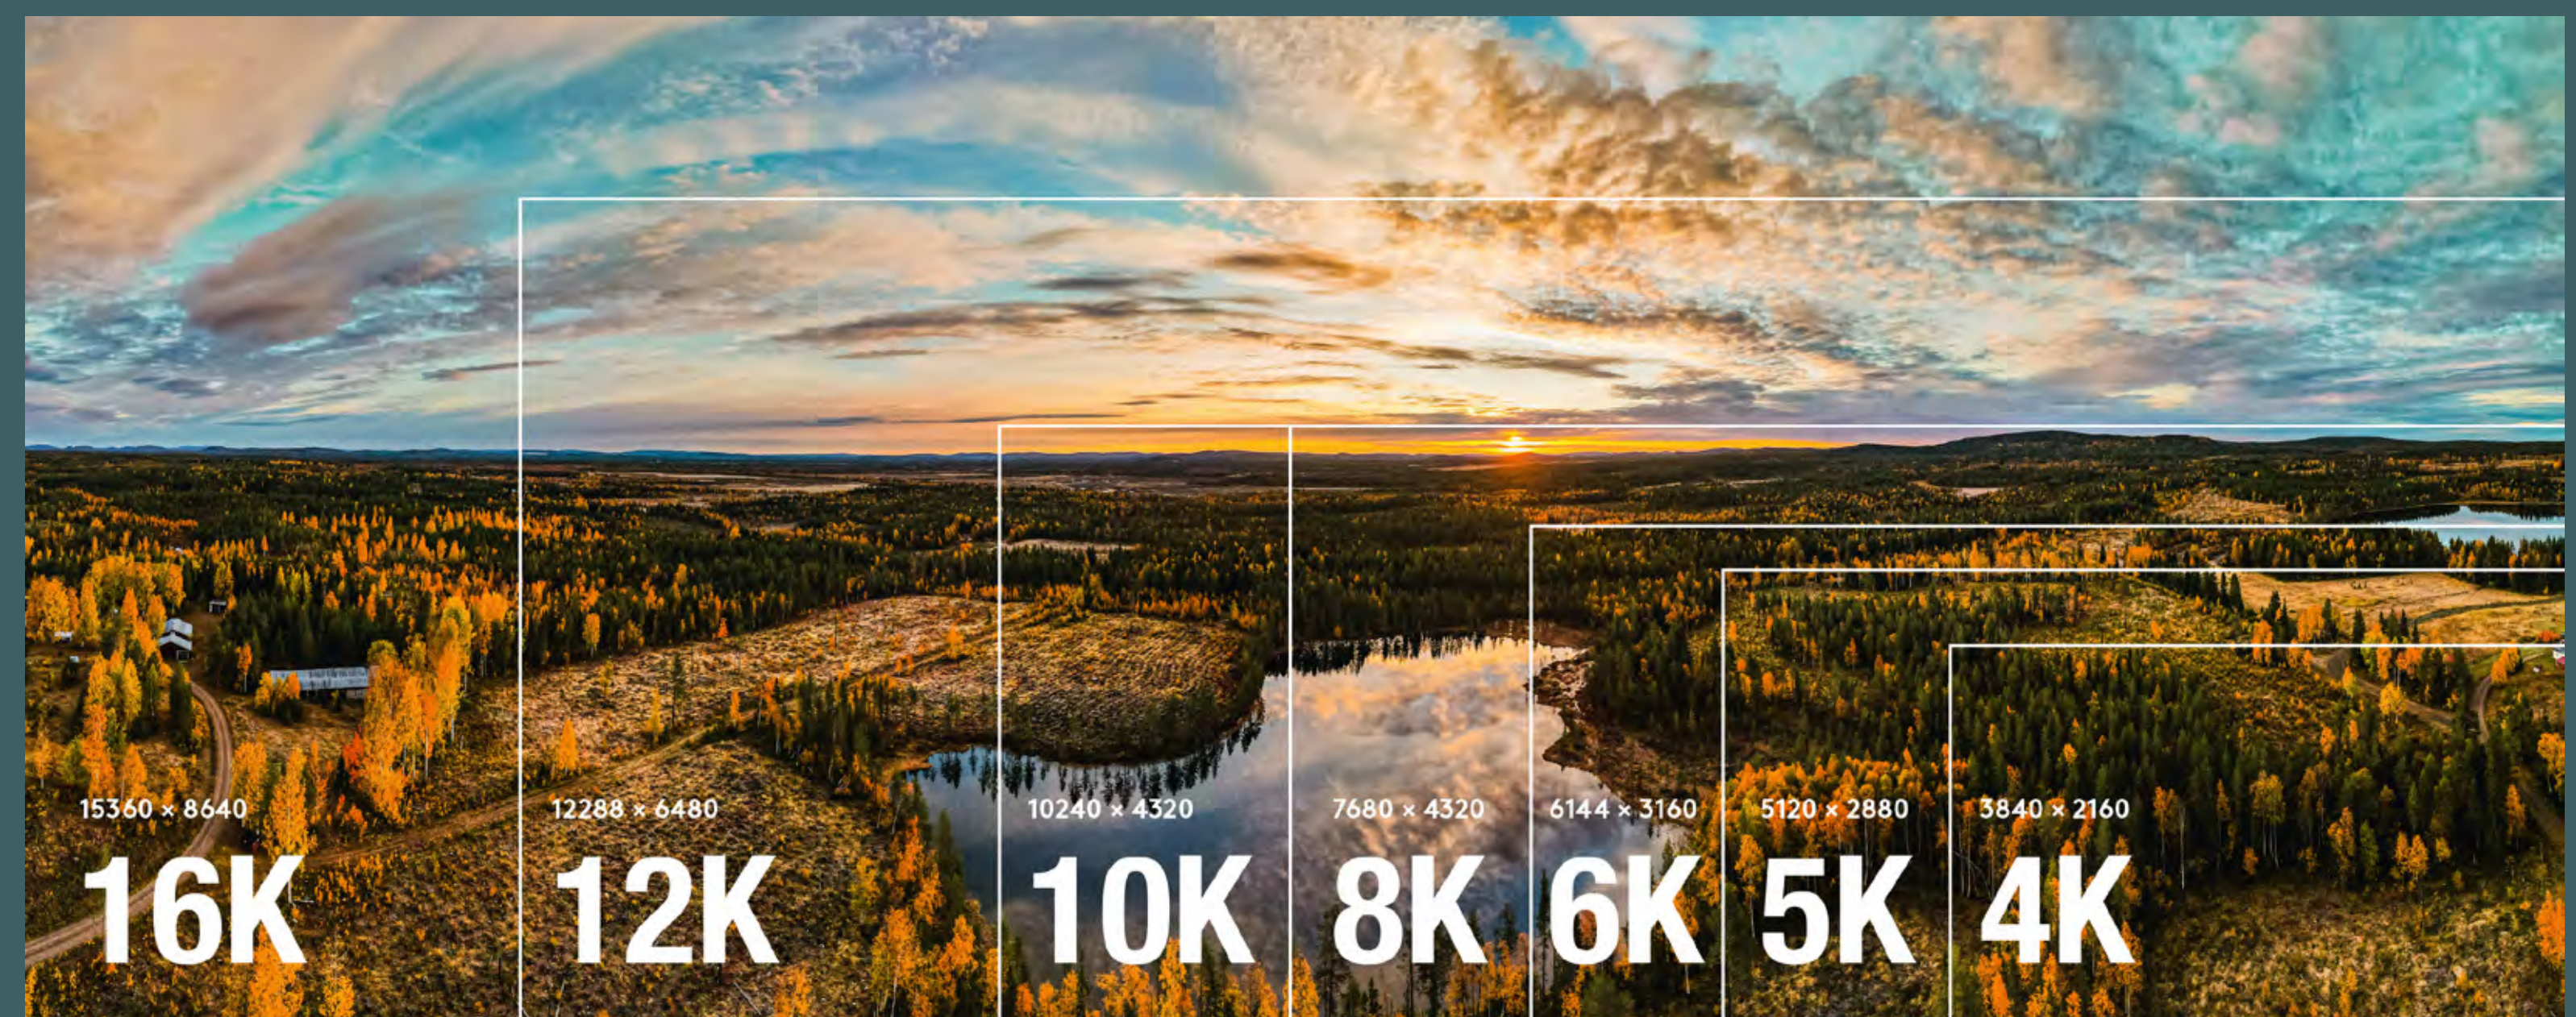


The Plus in Quality

The Goobay+ series provides the perfect equipment for demanding high-end audio and 8K Ultra HD visuals: Top-quality cables for every entertainment experience, boasting a wide array of compatible connectors.



- **Elegant and slim design**
with elegant metal plugs and flexible textile sheath
- **Robust and hardwearing**
with integrated bend protection and gold-plated plugs to prevent corrosion
- **The perfect experience**
High-quality technology guarantees crystal-clear audio-video transmission

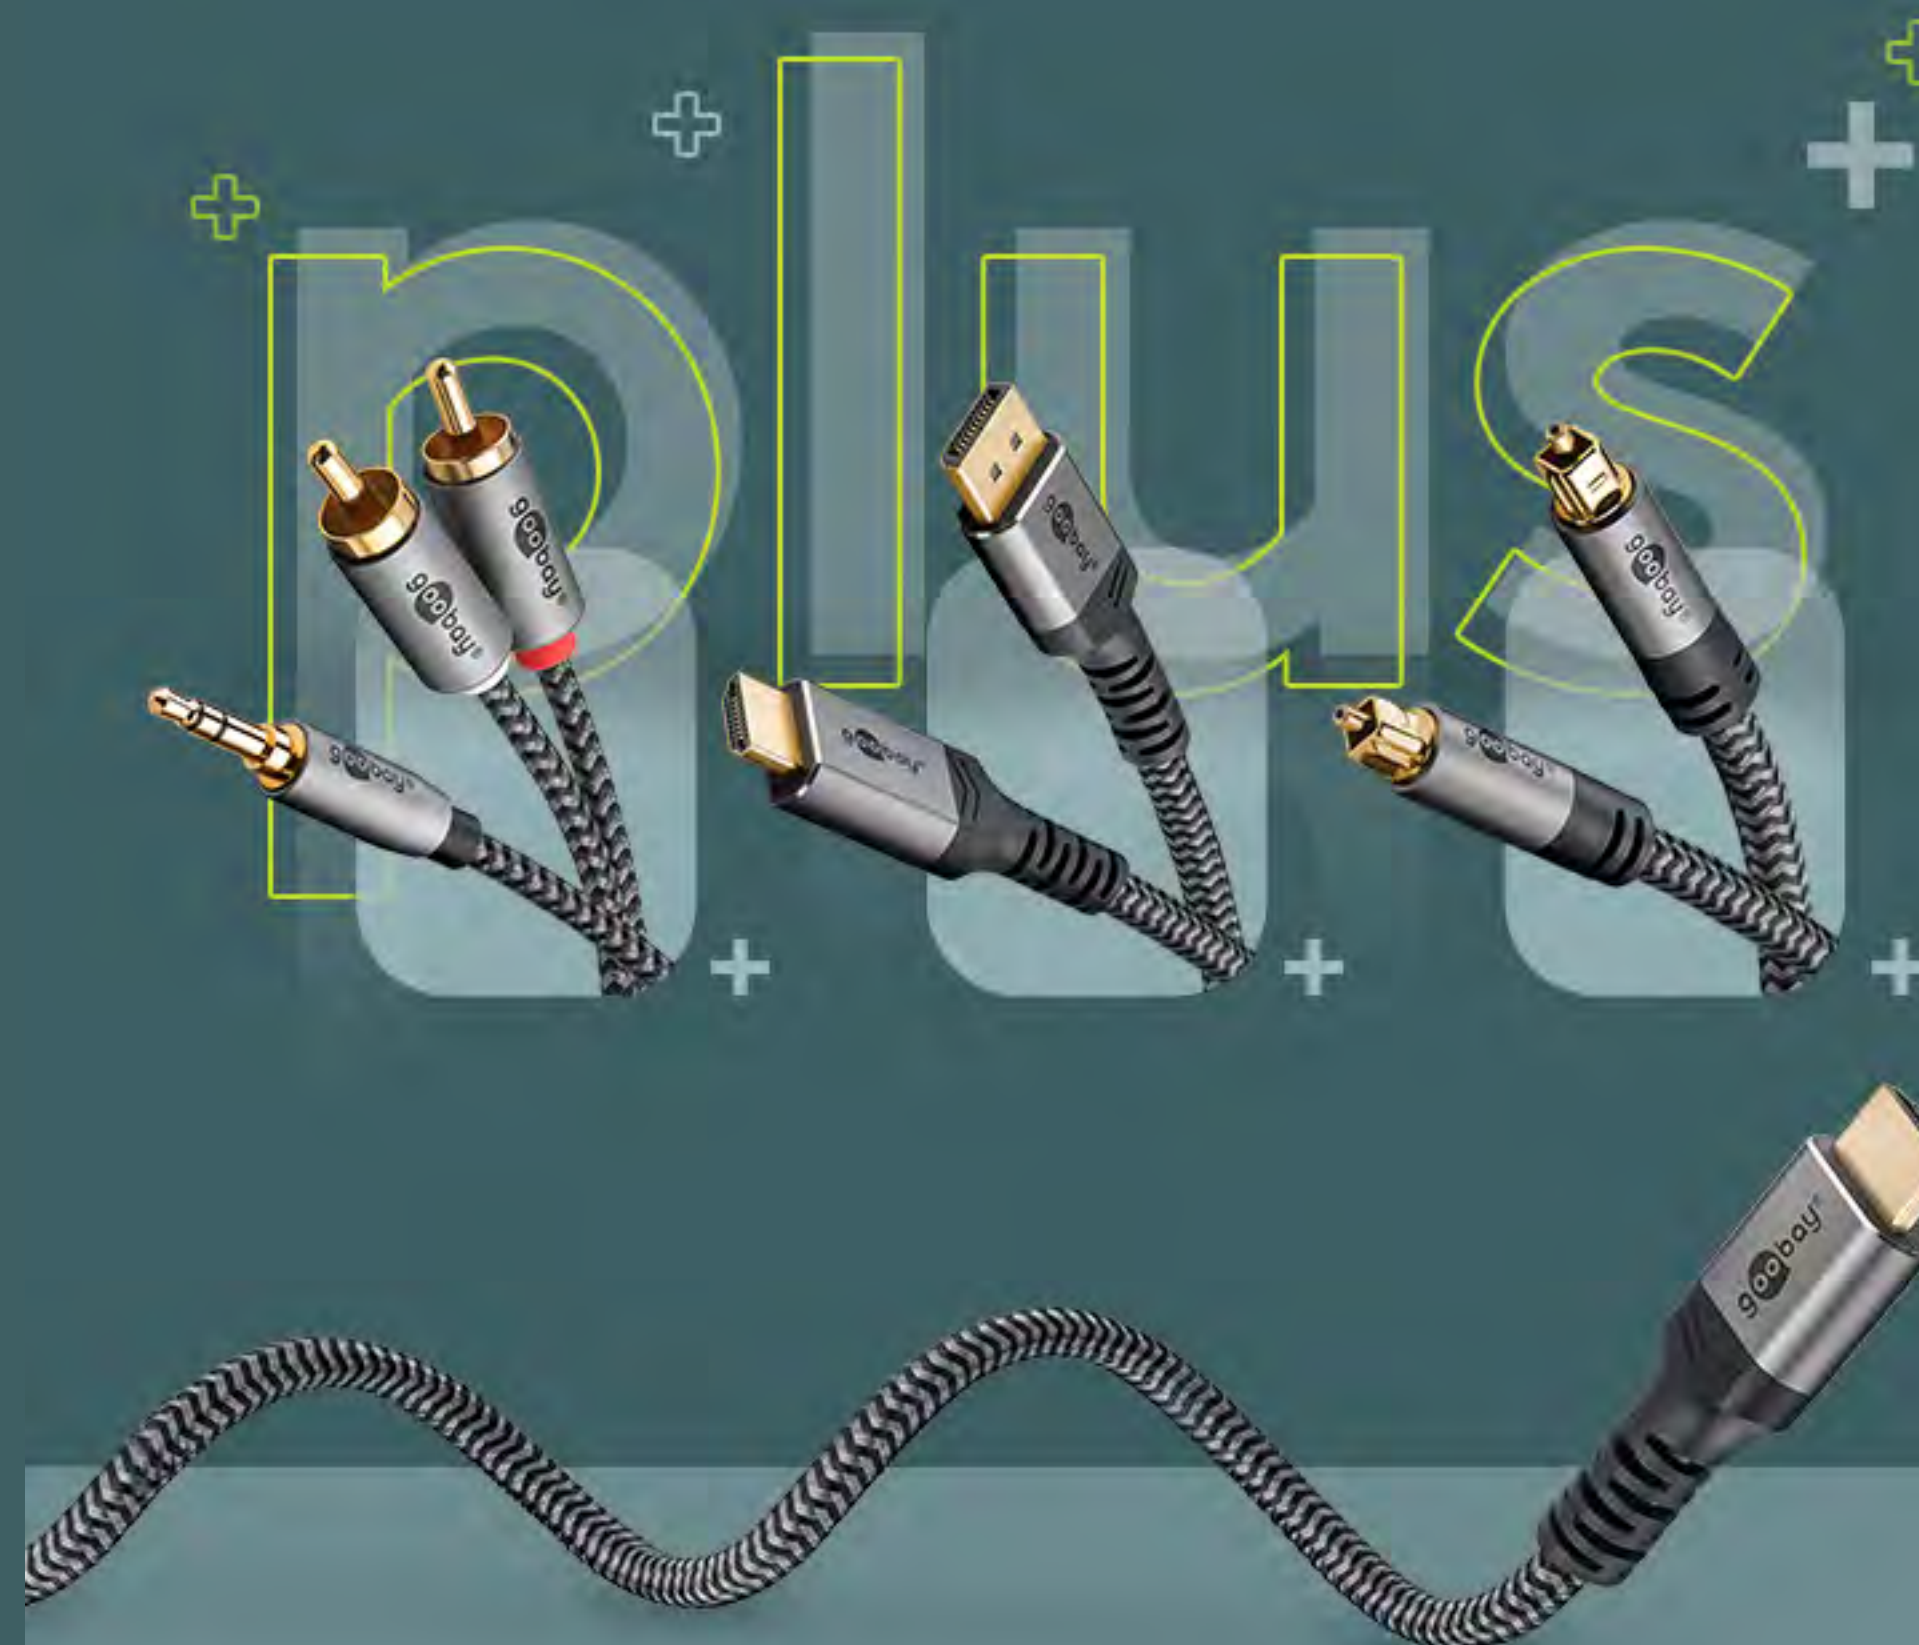

HIGH SPEED HDMI™ CABLE



GOOBAY PLUS || 4K@ 60 Hz

0.50 m	64992
1.00 m	64993
2.00 m	64994
3.00 m	64995
5.00 m	64996
10.0 m	64997
15.0 m	64998



GOOBAY PLUS || 8K@ 60 Hz

0.50 m	64999
1.00 m	65260
2.00 m	65261
3.00 m	65262
5.00 m	65263



Ultra High Speed HDMI™ Cable with Ethernet

Ultra High-Speed HDMI™ cables deliver razor-sharp images and crystal-clear sound – pure performance with up to 16K at 60 Hz. Universally suitable for audio and video transmission between televisions/monitors and projectors, game consoles or streaming receivers. Ultra-strong connection, ultra-strong entertainment.

ESSENTIAL

4K @ 60 Hz

0.50 m ●	60619
1.00 m ●	60620
1.50 m ●	60621
2.00 m ●	60622
3.00 m ●	60623
5.00 m ●	60624
7.50 m ●	60625
10.0 m ●	60626
15.0 m ●	60627

8K @ 60 Hz

0.50 m ●	61637
1.00 m ●	61638
1.50 m ●	61639
2.00 m ●	61640
3.00 m ●	61641
5.00 m ●	61642
7.50 m	-
10.0 m	-
15.0 m	-

16K @ 60 Hz

0.50 m ●	80073
1.00 m ●	80091
1.50 m ●	80092
2.00 m ●	80094
3.00 m	-
5.00 m	-
7.50 m	-
10.0 m	-
15.0 m	-

STANDARD

4K @ 60 Hz

0.50 m ●	61149	●	61017
1.00 m ●	61150	●	61018
1.50 m ●	61158	●	61019
2.00 m ●	61159	●	61020
3.00 m ●	61160	●	61021
5.00 m ●	61161	●	61022
7.50 m ●	61162	●	61023
10.0 m ●	61163	●	61024
15.0 m ●	61164	●	61025
20.0 m ●	74473	-	-

8K @ 60 Hz

0.50 m ●	41081
1.00 m ●	41082
1.50 m ●	41083
2.00 m ●	41084
3.00 m ●	47575
5.00 m ●	52766
7.50 m ●	64985
10.0 m	-
15.0 m	-
20.0 m	-

PREMIUM, CERTIFIED

4K @ 60 Hz

0.50 m ●	72315
1.00 m ●	72316
1.50 m ●	72317
2.00 m ●	72318
3.00 m ●	72319
5.00 m ●	72320

8K @ 60 Hz

0.50 m ●	58267
1.00 m ●	58263
1.50 m	-
2.00 m ●	58264
3.00 m ●	58265
5.00 m ●	58266



SLIM

- Ultraslim design with short plug and bend protection
- The small bending radius is ideal for confined spaces, e.g. for rear connections of devices in front of walls or in furniture



FLAT CABLE

- The flat design is perfect for discreet, space-saving installation, e.g. in cable ducts, behind furniture, under carpets or along skirting boards



OPTICAL HYBRID (AOC)

- AOC cable (Active Optical Cable) with HDMI™ connectors and a hybrid fibre-optic copper conductor for interference-free transmissions
- Thanks to AOC technology, the cable bridges long cable runs without loss and achieves high data rates without additional amplification
- The cable converts electrical data signals into optical and back into electrical signals at the end of the cable (unidirectional)
- The slim, robust metal plugs with bend protection are especially convenient for confined spaces



FERRITE

- Ferrite cores prevent electromagnetic interference from high-frequency devices in the vicinity of the cable



EXTENSION CABLE

- Especially handy for extending existing or fixed, hard-to-reach HDMI™ connections



ANGLED CABLES

The space-saving solution for the smallest of spaces, e.g. on rear device sockets

90° CABLE (UP)

The 90° angle of the plug angles the connection upwards



90° CABLE (DOWN/270°)

The 90° angle of the plug angles the connection downwards



360° CABLE

Horizontally and vertically freely rotatable plugs for a fully flexible connection



CONNECTING AND ANGLED CABLES


4K @ 60 Hz

ESSENTIAL



- 0.50 m ● 60619
- 1.00 m ● 60620
- 1.50 m ● 60621
- 2.00 m ● 60622
- 3.00 m ● 60623
- 5.00 m ● 60624
- 7.50 m ● 60625
- 10.0 m ● 60626
- 15.0 m ● 60627

STANDARD

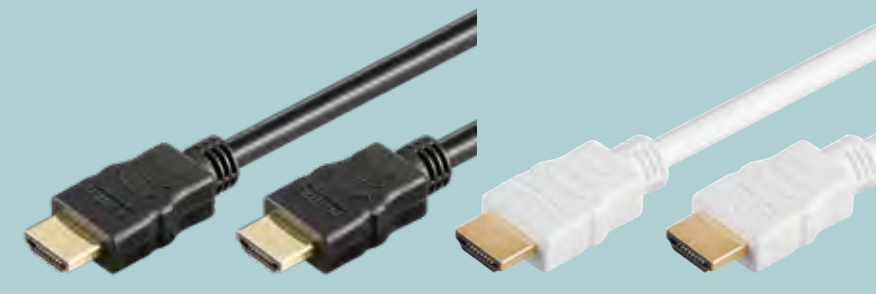

- 0.50 m ● 61149 ● 61017
- 1.00 m ● 61150 ● 61018
- 1.50 m ● 61158 ● 61019
- 2.00 m ● 61159 ● 61020
- 3.00 m ● 61160 ● 61021
- 5.00 m ● 61161 ● 61022
- 7.50 m ● 61162 ● 61023
- 10.0 m ● 61163 ● 61024
- 15.0 m ● 61164 ● 61025
- 20.0 m ● 74473 -

PREMIUM
CERTIFIED



- 0.50 m ● 72315
- 1.00 m ● 72316
- 1.50 m ● 72317
- 2.00 m ● 72318
- 3.00 m ● 72319
- 5.00 m ● 72320

PLUS



- 0.50 m ● 64992
- 1.00 m ● 64993
- 2.00 m ● 64994
- 3.00 m ● 64995
- 5.00 m ● 64996
- 10.0 m ● 64997
- 15.0 m ● 64998

AOC



- 10.0 m ● 65566
- 20.0 m ● 65567
- 30.0 m ● 65568
- 40.0 m ● 65569
- 50.0 m ● 65570
- 100 m ● 65573

CONNECTING
AND ANGLED
CABLES

4K @ 60 Hz



CONNECTING AND ANGLED CABLES


4K @ 60 Hz

SLIM



0.50 m	● 75292
1.00 m	● 75293
1.50 m	-
2.00 m	● 75294
3.00 m	● 75295
5.00 m	● 75296
7.50 m	-
10.0 m	-

PLUS SLIM

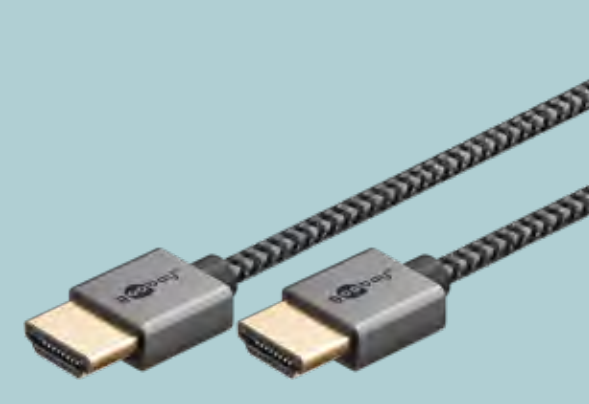

0.50 m	● 75751
1.00 m	● 75752
1.50 m	-
2.00 m	● 75753
3.00 m	● 75754
5.00 m	● 75755
7.50 m	-
10.0 m	-

FERRITE



0.50 m	-
1.00 m	● 61299
1.50 m	● 61300
2.00 m	● 61301
3.00 m	● 61302
5.00 m	● 61303
7.50 m	● 61304
10.0 m	● 61305

FLAT




0.50 m	-
1.00 m	● 61277
1.50 m	● 61278
2.00 m	● 61279
3.00 m	● 61280
5.00 m	● 61281
7.50 m	-
10.0 m	-

EXTENSION




0.50 m	● 61306
1.00 m	● 61307
1.50 m	● 61308
2.00 m	● 61309
3.00 m	● 61310
5.00 m	● 61313

90° UP

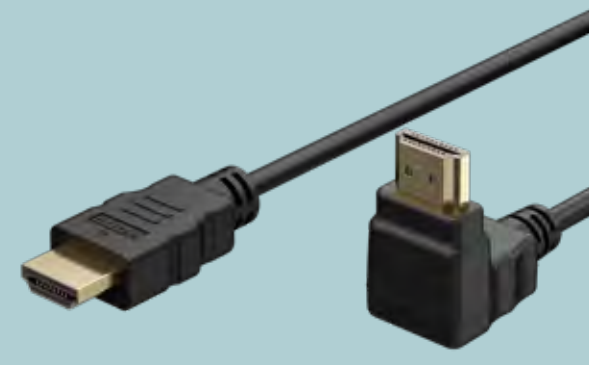

0.50 m	● 61293
1.00 m	● 61294
1.50 m	● 61295
2.00 m	● 61296
3.00 m	● 61297
5.00 m	● 61298

270° DOWN

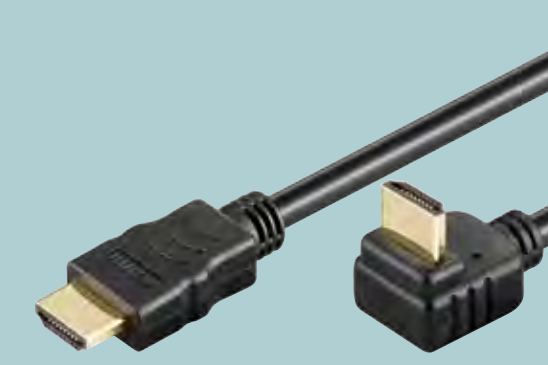

0.50 m	● 61263
1.00 m	● 61272
1.50 m	● 61273
2.00 m	● 61274
3.00 m	● 61275
5.00 m	● 61276

360°



0.50 m	-
1.00 m	-
1.50 m	● 61283
2.00 m	● 61286
3.00 m	● 61289
5.00 m	● 61292

CONNECTING CABLES

8K @ 60 Hz



CONNECTING CABLES

8K @ 60 Hz

ESSENTIAL



0.50 m	●	61637
1.00 m	●	61638
1.50 m	●	61639
2.00 m	●	61640
3.00 m	●	61641
5.00 m	●	61642

STANDARD



0.50 m	●	41081
1.00 m	●	41082
1.50 m	●	41083
2.00 m	●	41084
3.00 m	●	47575
5.00 m	●	52766
7.50 m	●	64985

CERTIFIED



0.50 m	●	58267
1.00 m	●	58263
1.50 m	-	
2.00 m	●	58264
3.00 m	●	58265
5.00 m	●	58266

PLUS



0.50 m	●	64999
1.00 m	●	65260
1.50 m	-	
2.00 m	●	65261
3.00 m	●	65262
5.00 m	●	65263

OPTICAL HYBRID


ESSENTIAL



10.0 m	●	76274
20.0 m	●	76275
30.0 m	●	76276
40.0 m	●	76277
50.0 m	●	76278
70.0 m	-	
80.0 m	-	
100 m	-	

OPTICAL HYBRID

STANDARD

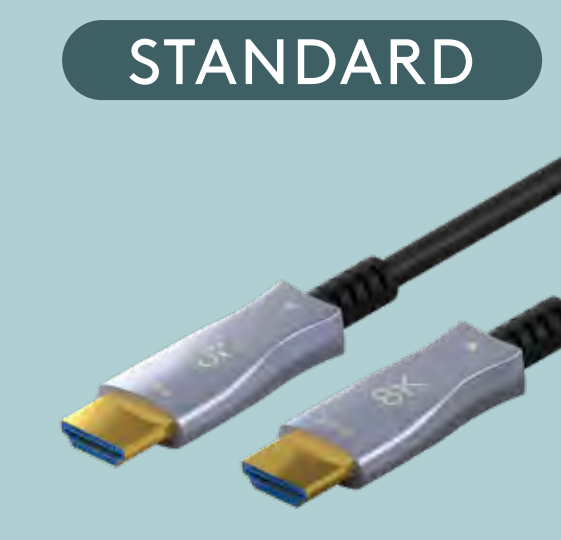

10.0 m	●	65558
20.0 m	●	65559
30.0 m	●	65560
40.0 m	●	65561
50.0 m	●	65562
70.0 m	●	65563
80.0 m	●	65564
100 m	●	65565

CONNECTING CABLES

8K @ 60 Hz



CONNECTING CABLES




8K@60Hz

SLIM



0.50 m	●	75297
1.00 m	●	75298
1.50 m	-	
2.00 m	●	75299
3.00 m	-	
5.00 m	-	

PLUS SLIM

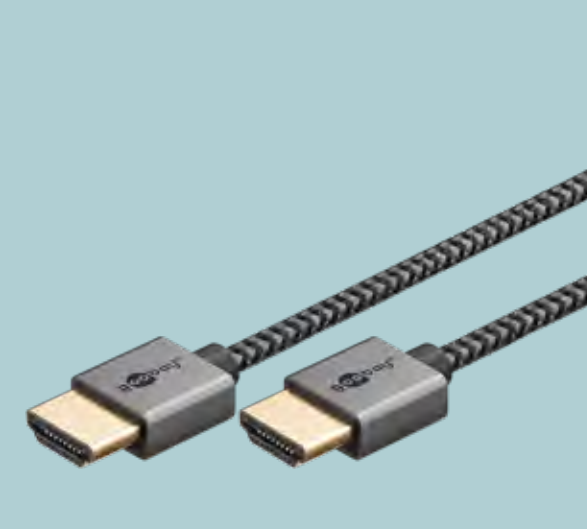

0.50 m	◐	75756
1.00 m	◐	75757
1.50 m	-	
2.00 m	◐	75758
3.00 m	-	
5.00 m	-	

FLAT



0.50 m	-	
1.00 m	●	77133
1.50 m	●	77134
2.00 m	●	77135
3.00 m	●	77145
5.00 m	-	

EXTENSION



0.50 m	●	76268
1.00 m	●	76269
1.50 m	●	76270
2.00 m	●	76271
3.00 m	●	76272
5.00 m	●	76273

PLUS EXTENSION



0.50 m	◐	79103
1.00 m	◐	79104
1.50 m	◐	79105
2.00 m	◐	79106
3.00 m	◐	79107
5.00 m	◐	79108

ADAPTER CABLES

4K@30Hz-8K@60Hz




HIGH SPEED HDMI™ CABLE TO MINI HDMI™

- HDMI™ Type A, Mini HDMI™ Type C

4K @ 60 Hz

1.00 m	● 74081
1.50 m	● 74082
2.00 m	● 74083
3.00 m	● 74087
5.00 m	● 74088



8K @ 60 Hz

1.00 m	● 74429
1.50 m	-
2.00 m	● 74430
3.00 m	● 74431
5.00 m	-





HIGH SPEED HDMI™ CABLE TO MICRO-HDMI™

- HDMI™ Type A, Micro-HDMI™ Type D


4K @ 60 Hz

0.50 m	● 53780
1.00 m	● 53781
1.50 m	● 53784
2.00 m	● 53785
3.00 m	● 53786
5.00 m	● 53787



8K @ 60 Hz

0.50 m	-
1.00 m	● 74432
1.50 m	-
2.00 m	● 74433
3.00 m	● 74434
5.00 m	-



HDMI™ CABLE ADAPTER

- Distributes 1x HDMI™ input signal to 2x HDMI™ outputs (Type A)

4K @ 60 Hz

0.10 m	● 68784
--------	---------



HDMI™ FLEX ADAPTER

- Flexible and bendable short extension for hard-to-reach connections, e.g. on the back of the TV (Type A)

4K @ 60 Hz

SLIM

0.10 m	● 64824
--------	---------




DVI-D/HDMI™ CABLE

- High-resolution signal transmission for Full HD TV up to 1080p, DVI Single Link (18+1 pin)


NICKEL-PLATED

1.00 m	● 50579
1.50 m	-
2.00 m	● 50580
3.00 m	● 50581
5.00 m	● 50582

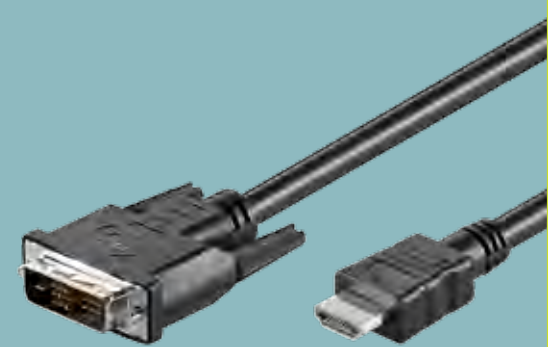

GOLD-PLATED

1.00 m	● 51579
1.50 m	● 51881
2.00 m	● 51580
3.00 m	● 51581
5.00 m	● 51582



ULTRA HIGH-SPEED HDMI™ FLEX ADAPTER

- Flexible and bendable short extension for hard-to-reach connections, e.g. on the back of the TV (Type A)

GOOBAY PLUS || 8K @ 60 Hz

0.10 m	● 79145
--------	---------



HDMI™ ADAPTER (COUPLING)

HDMI™ female (Type A) > HDMI™ female (Type A)

- HDMI™ coupling for connecting 2x HDMI™ cables without amplification or signal conditioning



4K @ 60 Hz

nickel-plated ● 68688
gold-plated ● 60729

8K @ 60 Hz

gold-plated ● 65743

GOOBAY PLUS
72008



HDMI™ ADAPTER

HDMI™ male (Type A) > HDMI™ female (Type A)

- Freely adjustable angle plug for connection even in confined spaces, e.g. to rear device sockets

4K @ 60 Hz

360°



● 60757



HDMI™ ANGLED ADAPTER

HDMI™ male (Type A) > HDMI™ female (Type A)

- For angled connection even in confined spaces, e.g. to rear device sockets

4K @ 60 Hz

90°



● 51724

270°



● 51725

90°



● 68782

270°



● 51727

8K @ 60 Hz

90°



● 65745

270°



● 65750

90°



● 65744

270°



● 65749

GOOBAY PLUS || 8K @ 60 Hz

90°



● 72010

270°



● 72012

90°



● 72009

270°



● 72011

HDMI™ Adapters

4K @ 60 Hz

Mini HDMI™ male (Type C) > HDMI™ female (Type A)

- UHD signal transmission with resolutions of up to 4K @ 60 Hz (2160p)



● 68841

Micro-HDMI™ male (Type D) > HDMI™ female (Type A)

- HDMI™ to Micro-HDMI™ adapter helps to directly connect devices such as PC, laptop, game console, DVD player, GoPro action camera, Raspberry Pi and TV set



● 68842

Micro-HDMI™ male (Type D) > HDMI™ female (Type A)

- Flexible and bendable short extension for connections that are difficult to access, e.g. on the back of the TV



● 58683

HDMI™/DVI Adapters

HDMI™/DVI-D Adapters

HDMI™ male (Type A) > DVI-D female Dual Link (24+1 pin)

- High-resolution transmission up to WQXGA (2560 x 1600p)



● 68930

HDMI™ male (Type A) > DVI-D male Dual Link (24+1 pin)

- High-resolution transmission up to WQXGA (2560 x 1600p)



● 68931

HDMI™/DVI-I Adapter

HDMI™ female (Type A) > DVI-I female Dual Link (24+5 pin)

- High-resolution transmission up to 1920 x 1200 @ 60 Hz



● 68690

HDMI™/VGA Adapter with Jack

Modern meets vintage. The adapter connects modern laptops with HDMI™ ports to older generation VGA monitors or projectors, complete with Full HD support (1080p). Perfect for monitor expansion in the office, when working from home or for gaming. The included jack cable (3.5 mm) provides audio transmission.

VGA male (15-pin) + 3.5 mm male (3-pin, stereo) > HDMI™ female (Type A)



● 61259

HDMI™ male (Type A) > VGA female (15-pin) + 3.5 mm female (3-pin, stereo)



0.10 m ● 68793


0.10 m ● 51758

HDMI™ male Type A) > VGA female (15-pin) + 3.5 mm female (3-pin, stereo)

GOLD-PLATED



● 44793

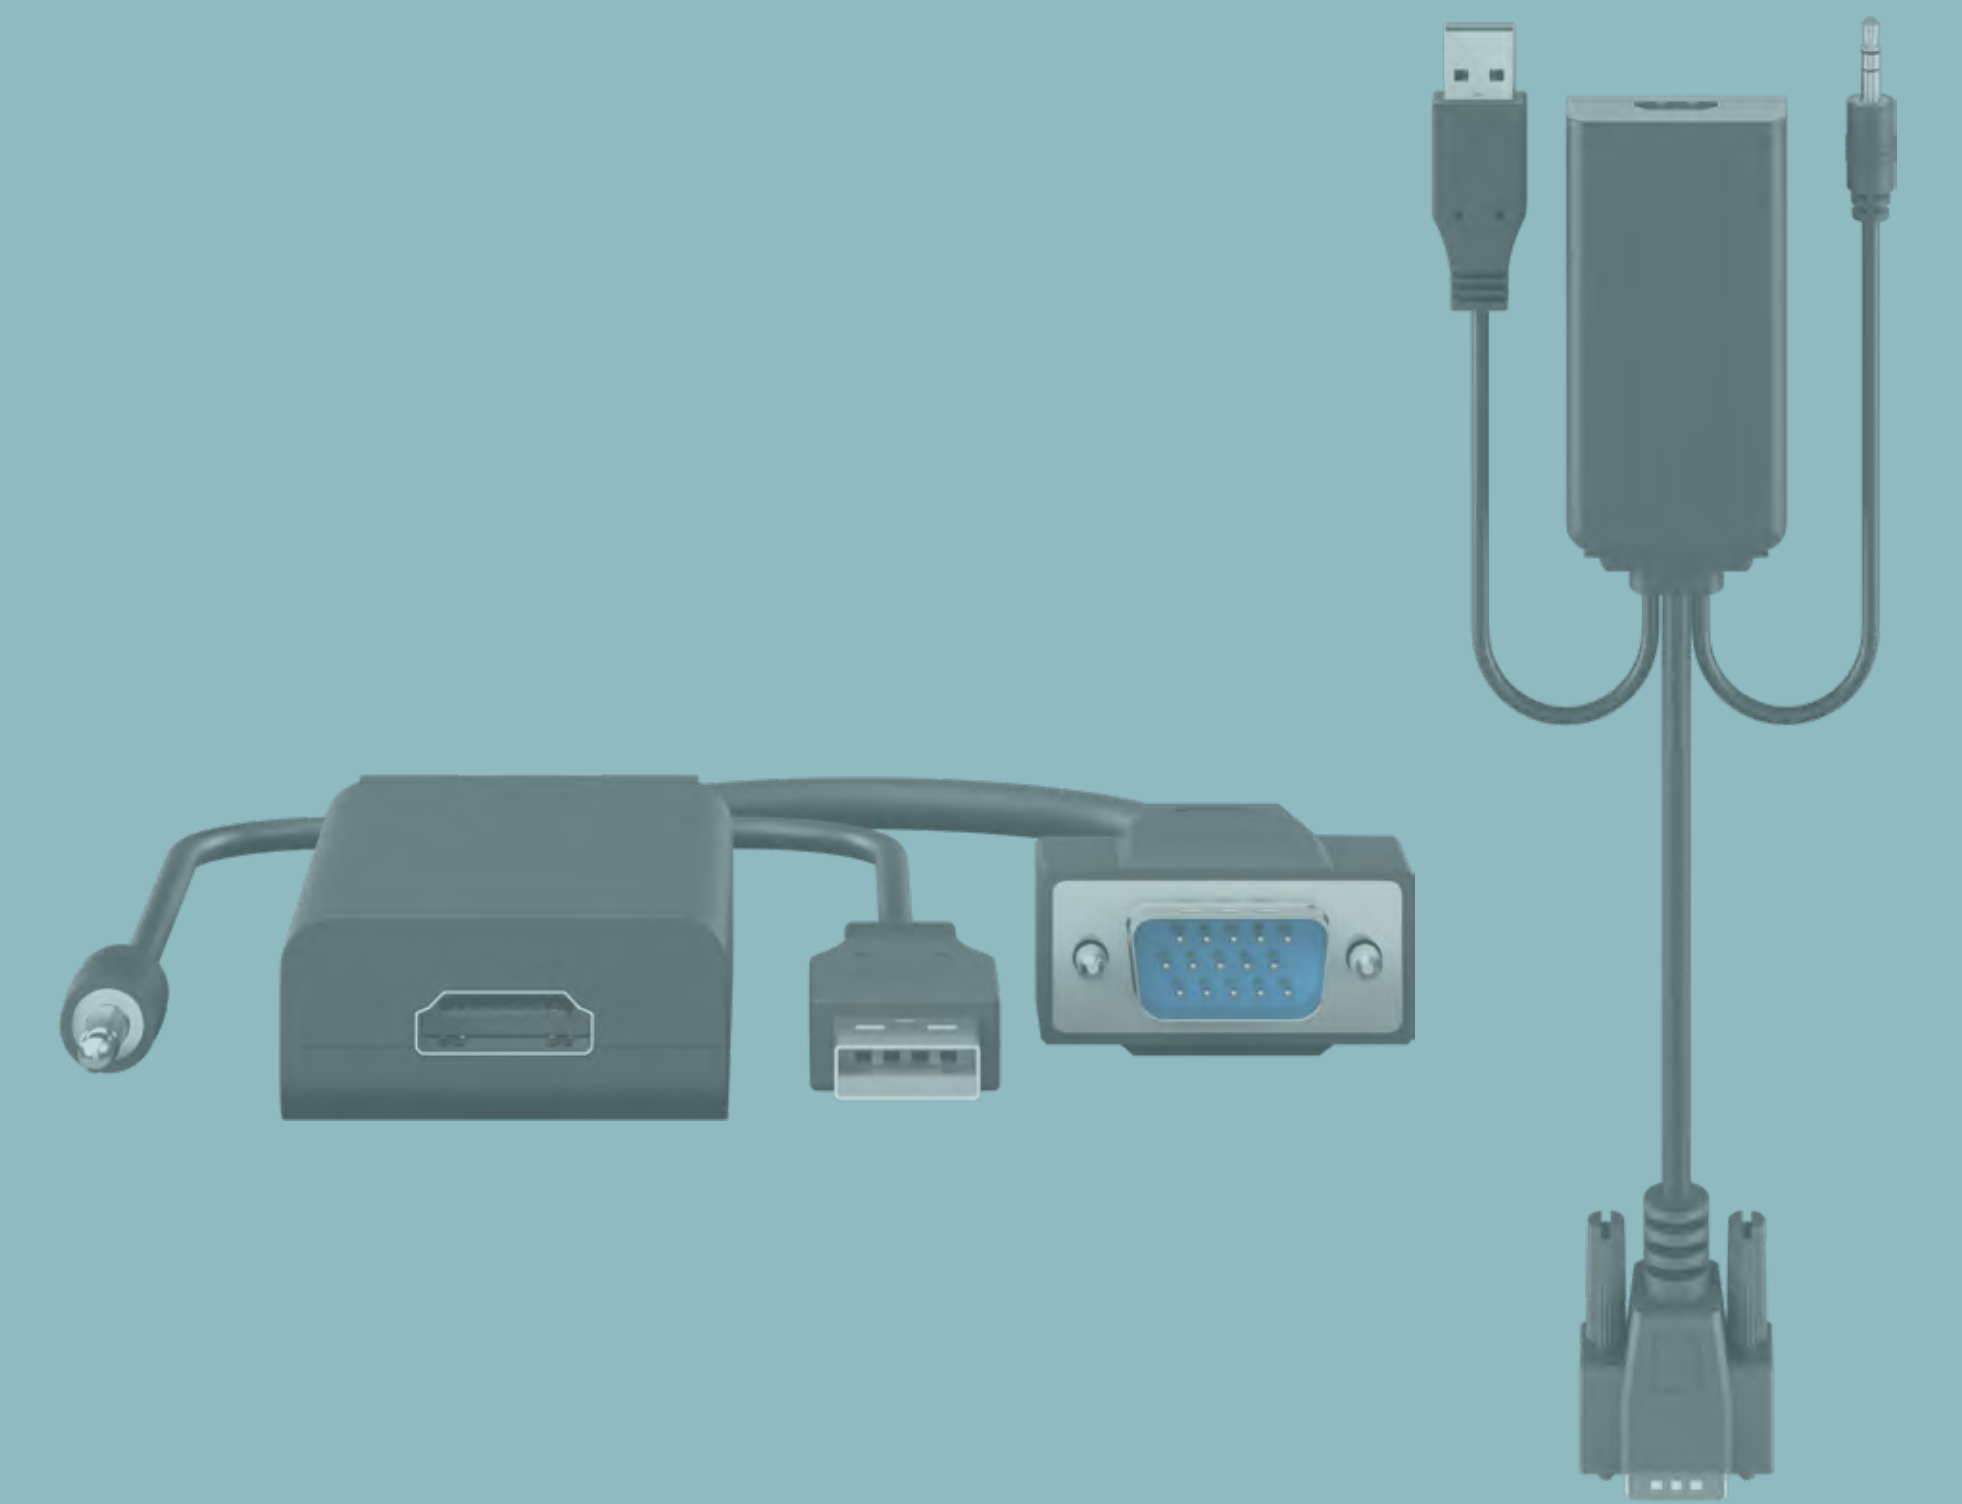

HDMI™ Wall Socket

- For connecting flush-mounted HDMI™-compatible devices to the wall, enabling signal transmission across rooms
- Easy to install in all standard 68 mm flush-mounted boxes or cavity wall boxes

4K @ 60 Hz

1x HDMI™ socket (Type A) > 1x HDMI™ socket (Type A)



● 51722

2x HDMI™ socket (Type A) > 2x HDMI™ socket (Type A)



● 51723



● 31961

HD CABLE TESTER

1x cable tester with 2x HDMI™ sockets (Type A) > 1x cable tester with 1x HDMI™ socket (Type A)

- Checks up to 19 individual wires and shielding
- Connection test with LED indicator, ideal for testing already installed HDMI™ cables with USB-A connector
- Control LEDs indicate the following results: power, continuity (Pass), not connected (Open), crossed wires (Cross) and short circuit (Short)
- Incl. protective bag and 2 controls
- Operation via 9 V battery (not included)





AUDIO/VIDEO

DISPLAYPORT™





DisplayPort™ Connection Cables

Breathtaking image quality, thrilling sound effects. DisplayPort™ cables are the go-to for all gamers and cinephiles who value high-resolution images in up to 8K at 120 Hz. DisplayPort™ also scores highly in the audio department, supporting high-quality sound formats such as Dolby Atmos.



Push button unlocks the plug lock, which ensures a secure hold without loose connections



Gold-plated connectors prevent corrosion and provide long-term, optimal signal transmission




PRODUCT OVERVIEW
DISPLAYPORT™

Version overview					
	DisplayPort™ 1.2	DisplayPort™ 1.4	DisplayPort™ 2.0/2.1		
	HBR2 High Bit Rate 2	HBR3 High Bit Rate 3	UHBR10 Ultra High Bit Rate 10	UHBR13.5 Ultra High Bit Rate 13.5	UHBR20 Ultra High Bit Rate 20
Max. speed	17.28 Gbit/s (21.6 Gbit/s)	25.92 Gbit/s (32.4 Gbit/s)	38.68 Gbit/s (40 Gbit/s)	52.22 Gbit/s (54 Gbit/s)	77.37 Gbit/s (80 Gbit/s)
Max. resolution	4K/60 Hz 1440p/144 Hz 1080p/240 Hz	8K/30 Hz 4K/120 Hz	8K/30 Hz 4K/144 Hz	8K/60 Hz 4K/240 Hz	10K/60 Hz 8K/60 Hz 4K/240 Hz
Max. resolution (DSC)	8K/60 Hz DSC 4K/144 Hz DSC	8K/60 Hz DSC 4K/240 Hz DSC	8K/144 Hz DSC (4:2:2) 4K/240 Hz DSC (4:2:0)	8K/144 Hz DSC 4K/240 Hz DSC	16K/60 Hz DSC 8K/240 Hz DSC

Product overview						
		DisplayPort™ 1.2	DisplayPort™ 1.4	DisplayPort™ 2.0/2.1		
	Length	Item	Item	Item	Item	Item
Essential						
	1.0 m	● 61709	● 61696	● 74743	● 74751	-
	2.0 m	● 61712	● 61697	● 74744	● 74752	-
	3.0 m	● 61713	● 61698	● 74745	● 74753	-
	5.0 m	● 61714	● 61699	● 74746	● 74754	-
Standard						
	1.0 m	-	● 64797	● 74747	● 74755	● 74760
	2.0 m	-	● 64798	● 74748	● 74756	● 74761
	3.0 m	-	● 64799	● 74749	● 74757	● 74762
	5.0 m	-	● 64800	● 74750	● 74758	-
Certified						
	1.0 m	-	● 74777	-	● 74759	● 74759
	2.0 m	-	● 74778	-	-	-
	3.0 m	-	● 74779	-	-	-
	5.0 m	-	-	-	-	-
Goobay Plus						
	1.0 m	-	● 65264	-	● 75679	● 75684
	2.0 m	-	● 65265	-	● 75680	● 75685
	3.0 m	-	● 65266	-	● 75681	● 75686
	5.0 m	-	● 65267	-	-	-

DisplayPort™ Cable 2.0/2.1, 80 Gbit/s


The latest DisplayPort™ generations deliver: gigantic data rates, stunning refresh rates of up to 240 Hz and high-frequency multi-monitor functions. Ideal for gaming with 8K resolutions, lag-free image reproduction and improved VR effects. For high-definition streaming and an entertainment experience without compromise.

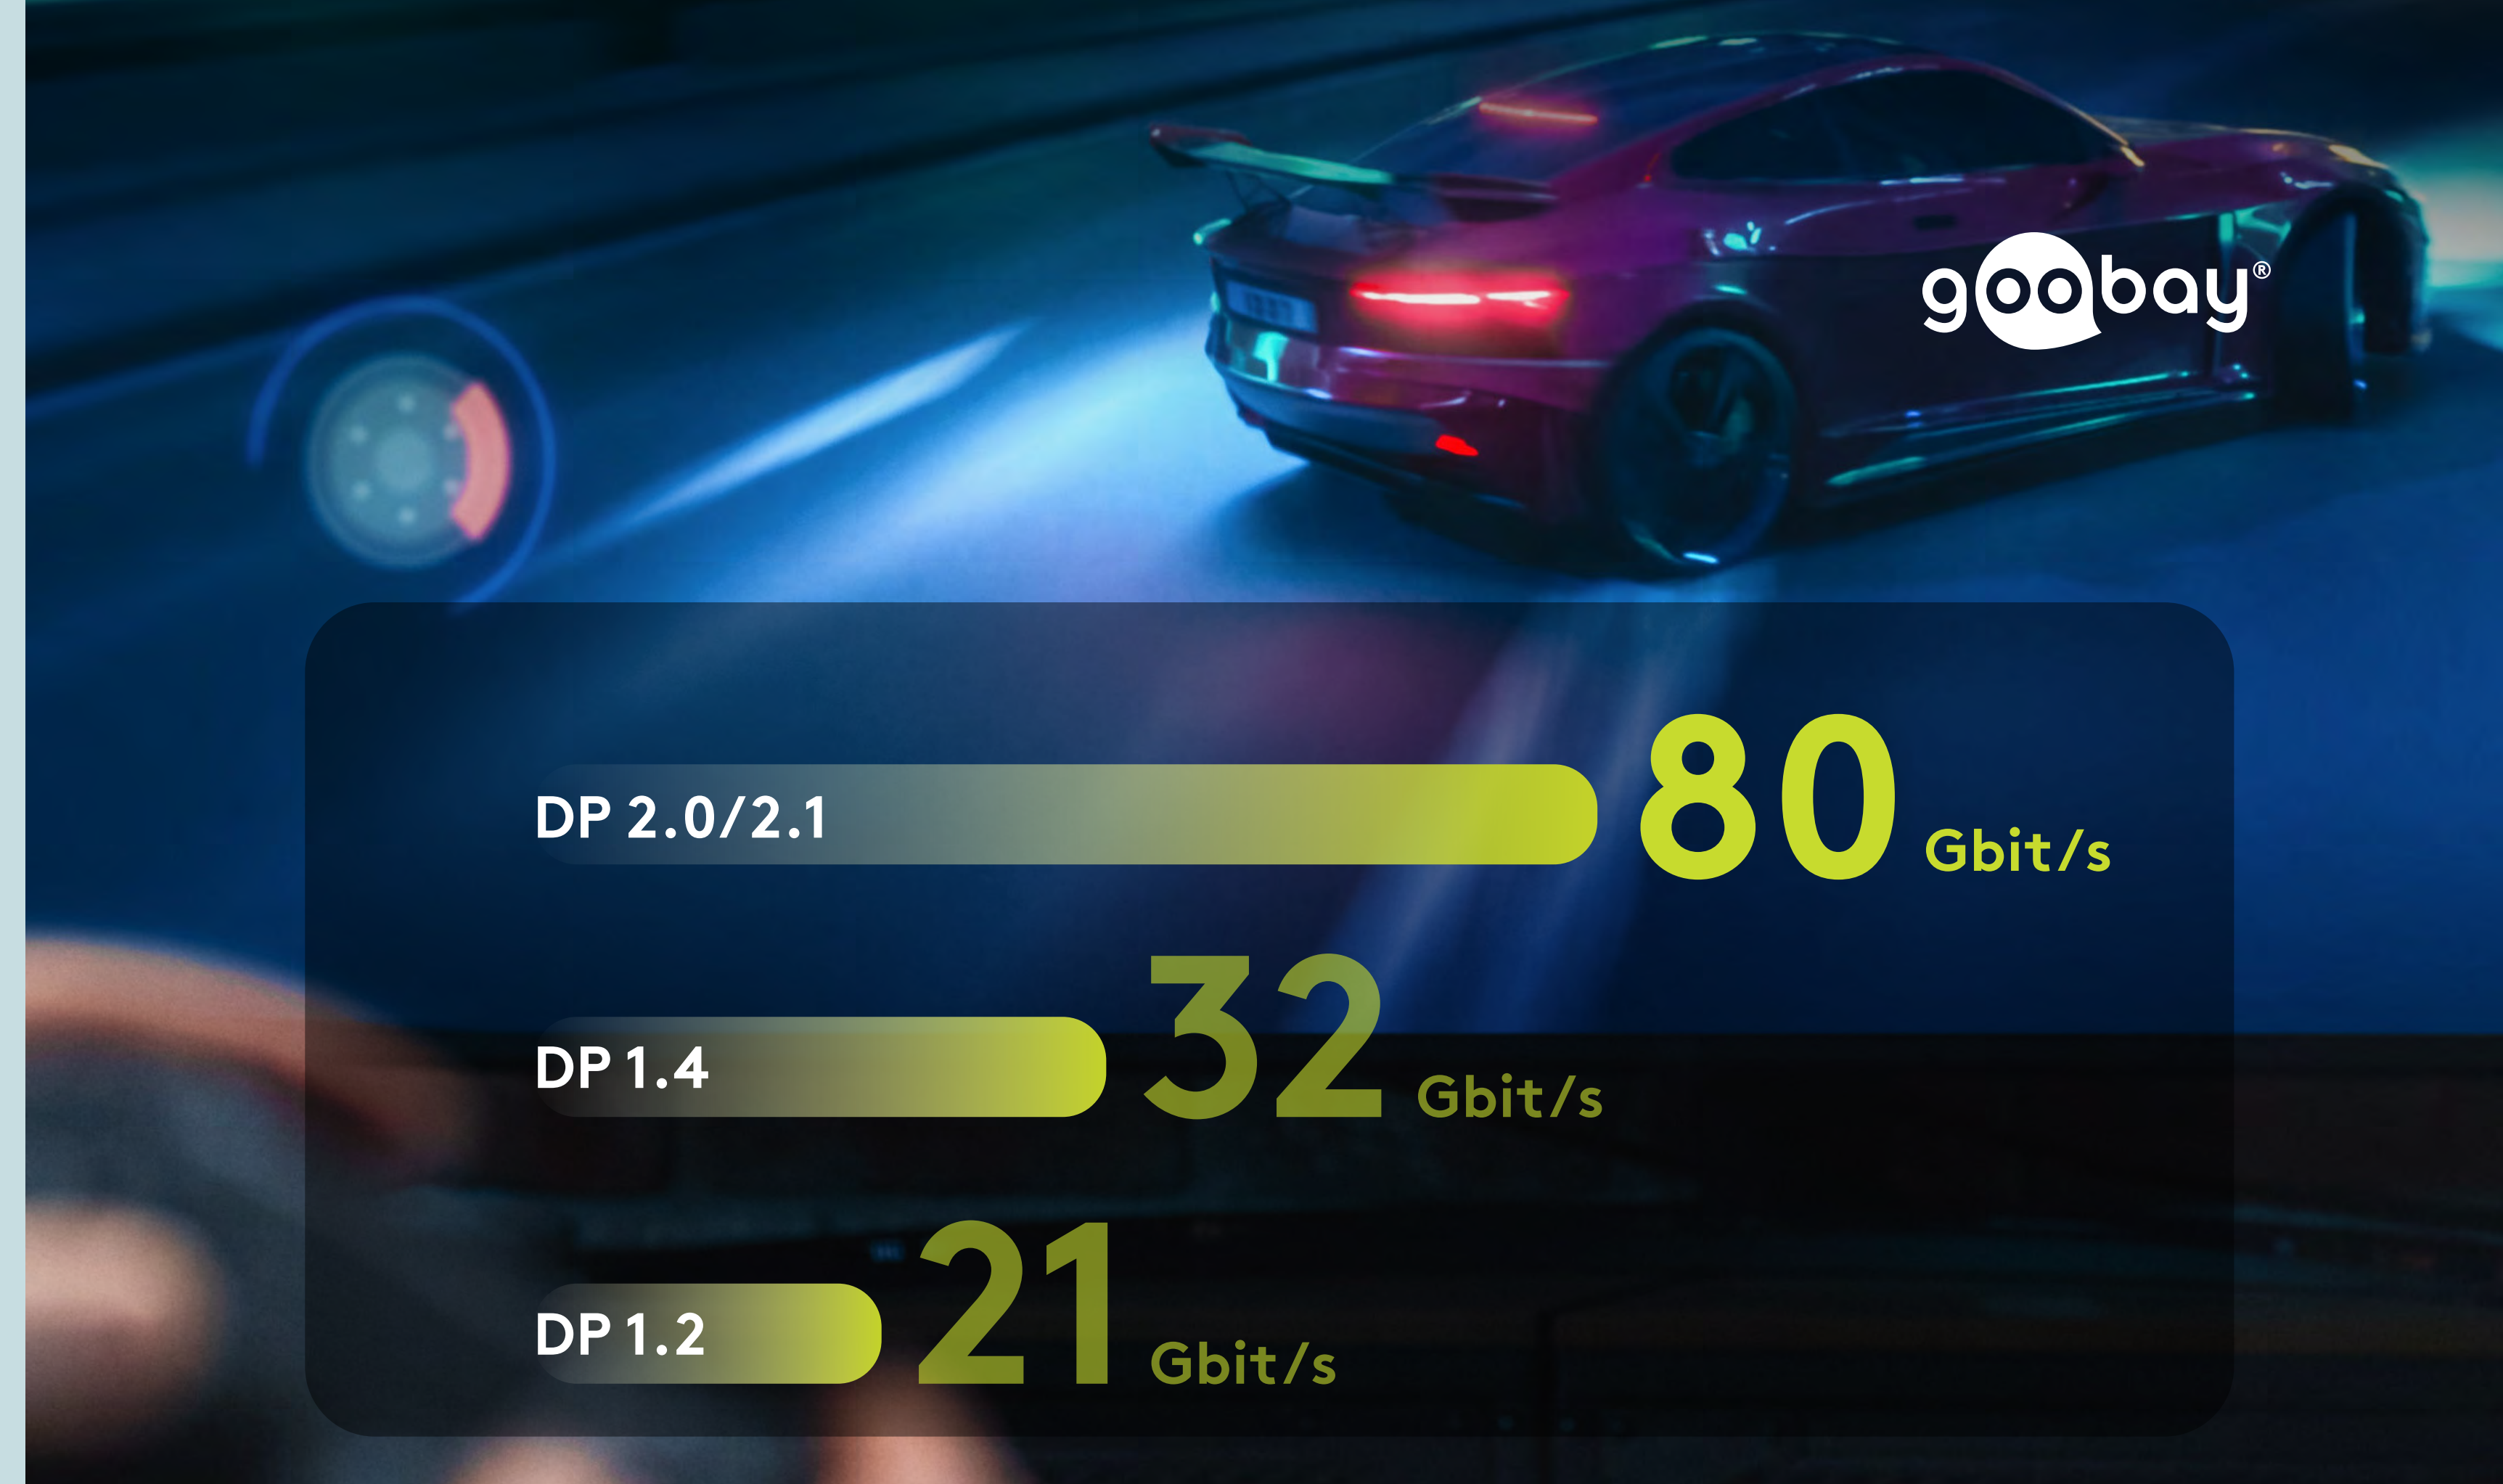

DP 2.0/2.1 **80** Gbit/s

DP 1.4 **32** Gbit/s

DP 1.2 **21** Gbit/s

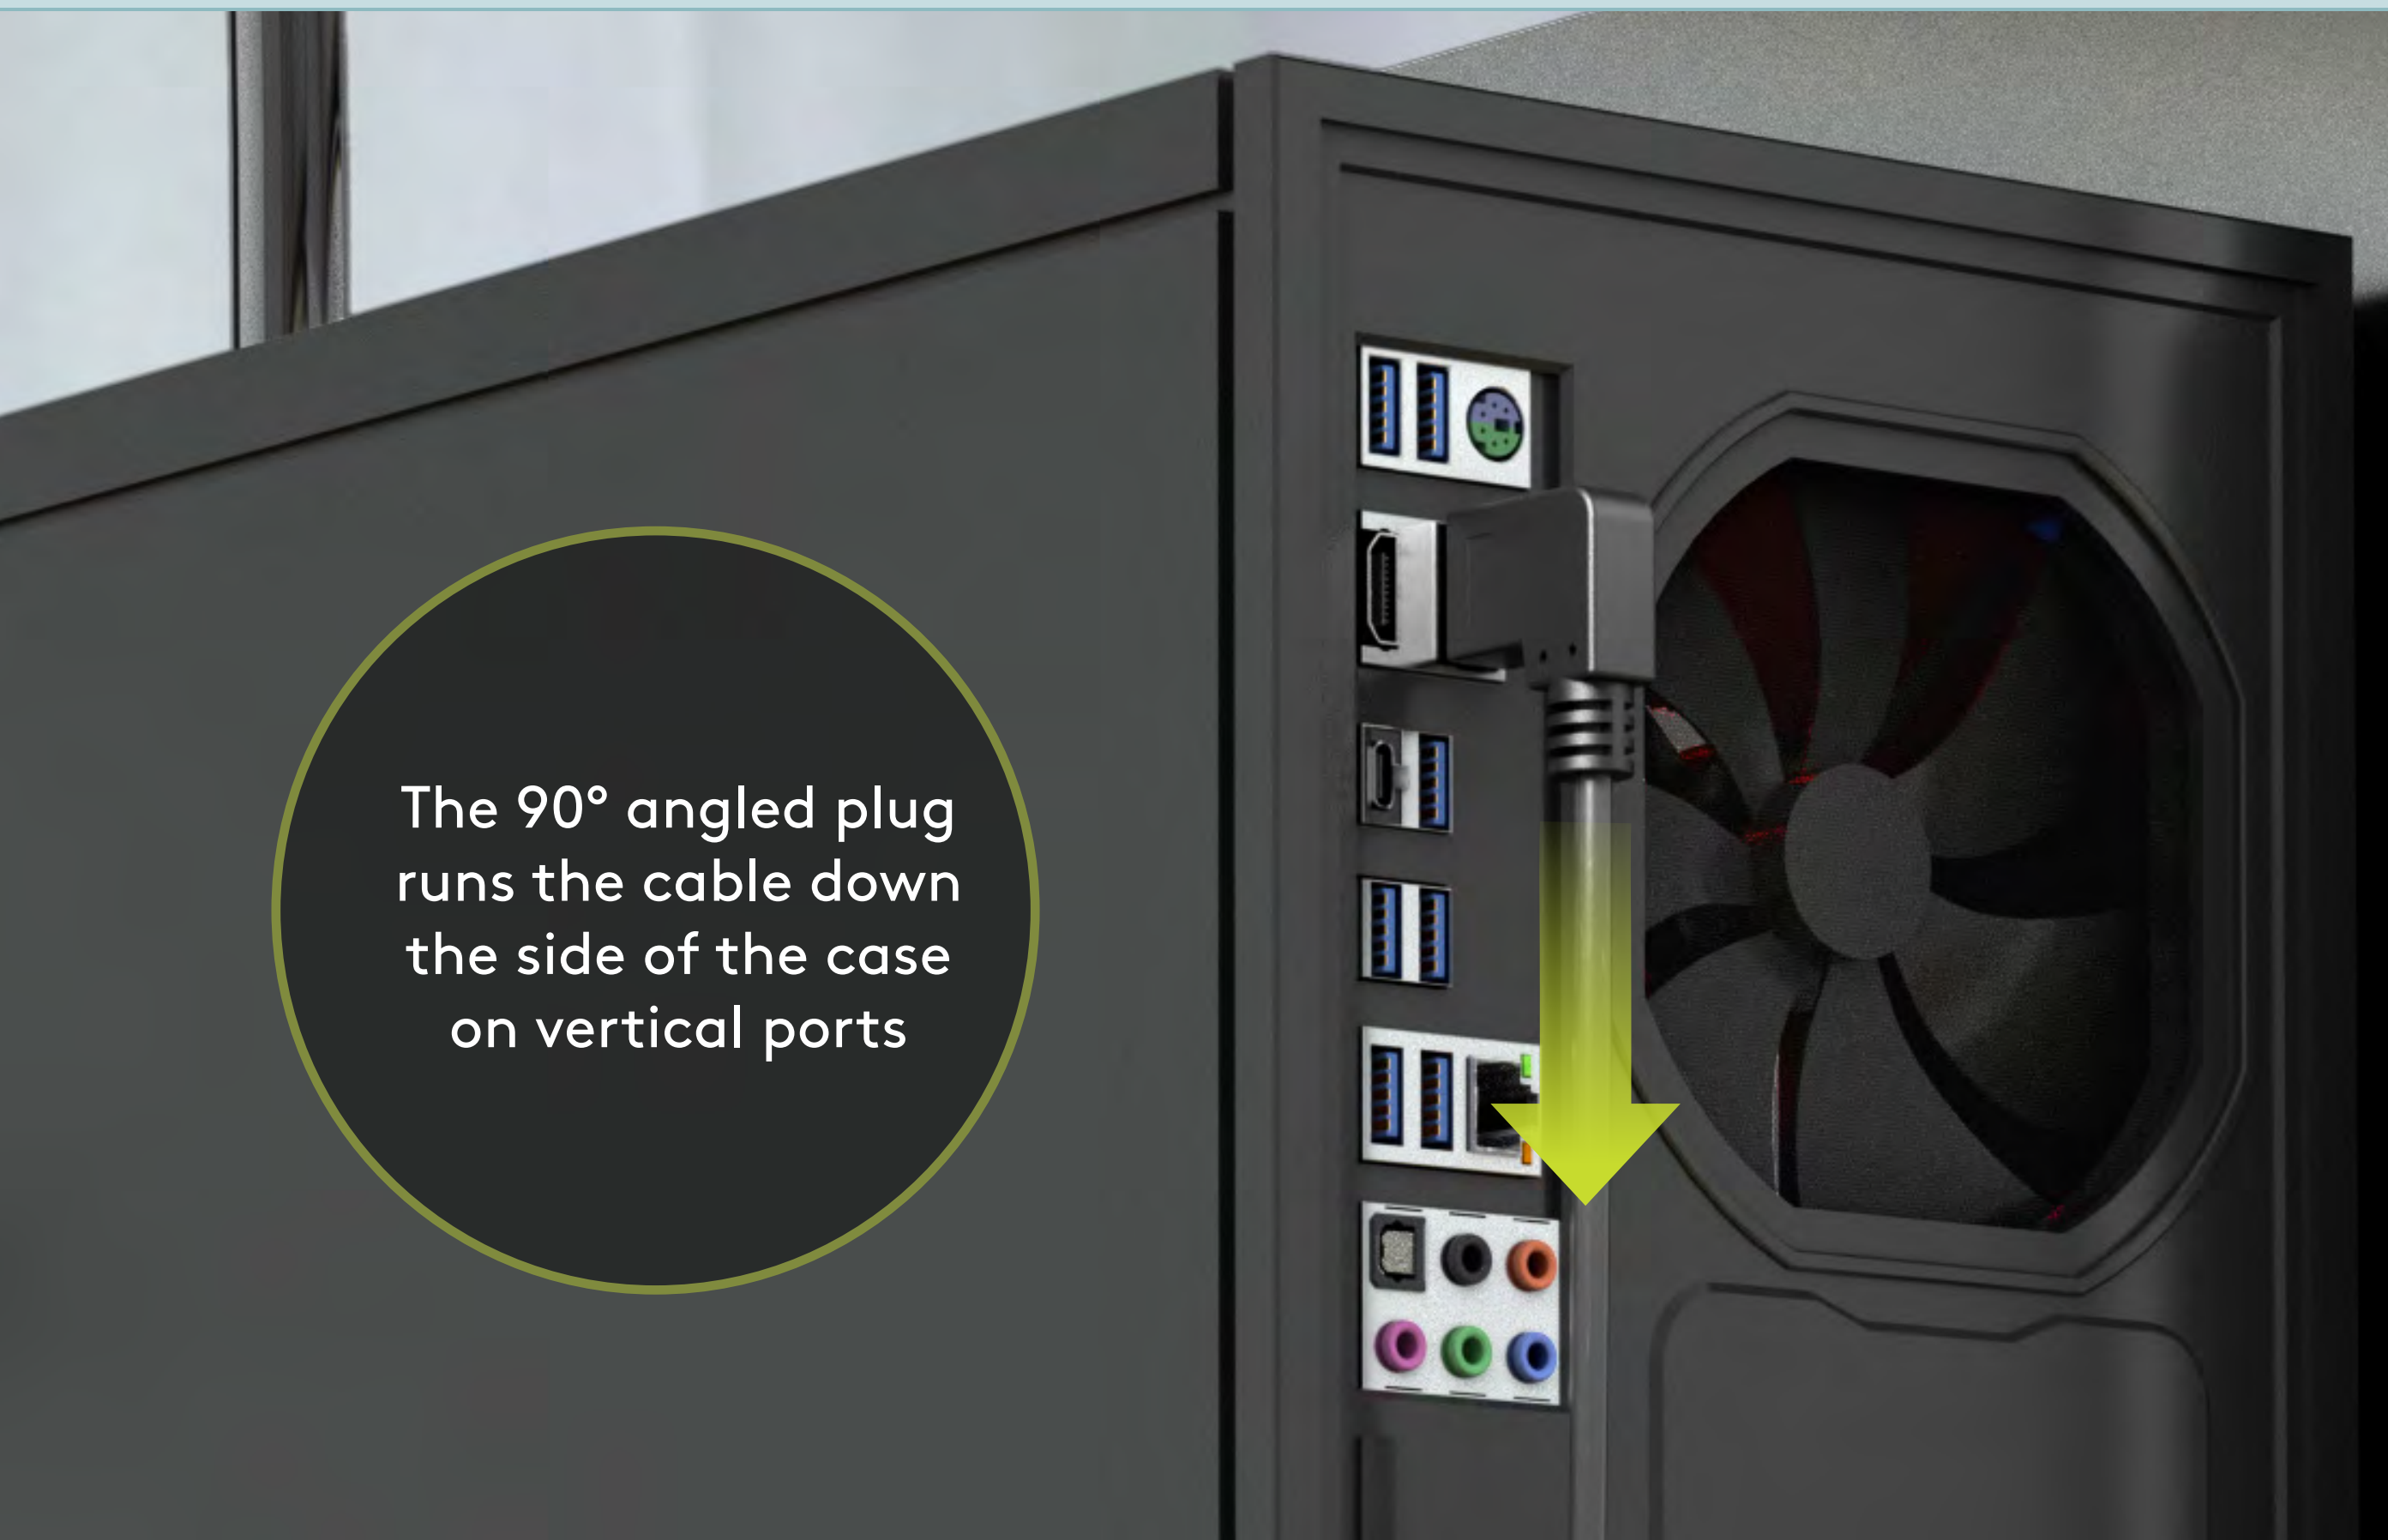

The 90° angled plug runs the cable down the side of the case on vertical ports

8K @ 144 Hz/4K @ 240 Hz

1.00 m	● 77052
2.00 m	● 77053
3.00 m	● 77054
5.00 m	● 77055

8K @ 144 Hz/4K @ 240 Hz

1.00 m	● 77056
2.00 m	● 77057
3.00 m	● 77058
5.00 m	● 77128

Optical DisplayPort™ Hybrid Connection Cable

The future of UHD: The fibre-optic hybrid cable transmits crystal-clear 8K images at 120 Hz (DSC) over long distances – without any loss. The connectors are marked with the source and target devices to ensure correct connection.

Optical DisplayPort™ Hybrid Connection Cable 2.0/2.1 (AOC), 40 Gbit/s

8K @ 60 Hz

4K @ 120 Hz

10.0 m	● 64866
20.0 m	● 64867
30.0 m	● 64868
50.0 m	● 64869



- AOC cable (Active Optical Cable) with DisplayPort™ connectors and a hybrid fibre-optic copper conductor for interference-free transmissions
- AOC technology bridges long cable runs without loss and achieves high data rates of up to 40 Gbit/s
- Converts electrical data signals into optical and back into electrical signals at the end of the cable (unidirectional)

DisplayPort™ to HDMI™ Adapter Cables

Two devices, two different ports? No problem. The adapter cable is the elegant solution for connecting DisplayPort™ sources to HDMI™ devices, e.g. a laptop to a monitor or television. The cables are directional (uni-directional) and only transmit from DisplayPort™ to HDMI™.




DisplayPort™ male > HDMI™ male (Type A)

- Equipped with a mechanical DisplayPort™ connector lock that provides secure hold and prevents loose contacts



4K @ 30 Hz	4K @ 60 Hz	8K @ 60 Hz
1.00 m ● 64835	1.00 m ● 64839	1.00 m ● 64845
2.00 m ● 64836	2.00 m ● 64842	2.00 m ● 64846
3.00 m ● 64837	3.00 m ● 64843	3.00 m ● 64847
5.00 m ● 64838	5.00 m ● 64844	5.00 m ● 64848

- Flexible premium cable with slim metal plugs, bend protection and colour-matched textile cable
- The braided textile sheath provides a pleasant feel and is gentle on sensitive surfaces
- The gold-plated plugs prevent corrosion and are especially durable

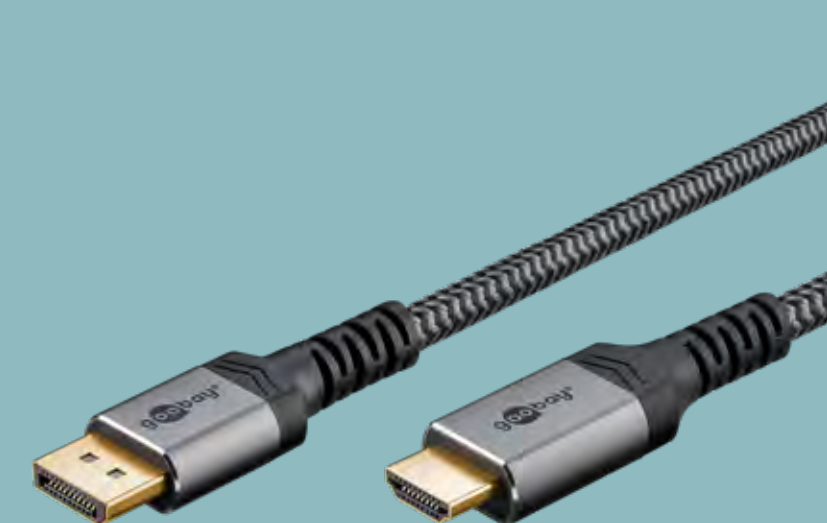

GOOBAY PLUS 4K @ 60 Hz	GOOBAY PLUS 8K @ 60 Hz
1.00 m ● 65268	1.00 m ● 78964
2.00 m ● 65269	2.00 m ● 78965
3.00 m ● 65270	3.00 m ● 78966
5.00 m ● 65271	

ADAPTER CABLES



**Mini DisplayPort™
 Adapter Cable**
 Mini DisplayPort™ male >
 DisplayPort™ male

1.00 m	● 52858
2.00 m	● 52859



**Mini DisplayPort™/HDMI™
 Adapter Cable**
 Mini DisplayPort™ male >
 HDMI™ male (Type A)

1.00 m	● 52860
2.00 m	● 52861



**DisplayPort™/DVI-D
 Adapter Cable**
 DisplayPort™ male >
 DVI-D male Dual Link (24+1 pin)

1.00 m	● 51960
2.00 m	● 51961
3.00 m	● 51962
5.00 m	● 51963

ADAPTERS &
 CONVERTERS

4K @ 30 Hz - 8K @ 60 Hz



ADAPTERS & CONVERTERS



DisplayPort™/HDMI™ Adapter Cable
 DisplayPort™ male >
 HDMI™ female (Type A)



4K @ 30 Hz
 0.10 m ● 67881

4K @ 60 Hz
 0.10 m ● 75269


8K @ 60 Hz
 0.10 m ● 75270



GOOBAY PLUS || 4K @ 60 Hz
 0.10 m ● 75271

GOOBAY PLUS || 8K @ 60 Hz
 0.10 m ● 75272

Mini DisplayPort™/HDMI™ Adapter Cable
 Mini DisplayPort male >
 HDMI™ female (Type A)

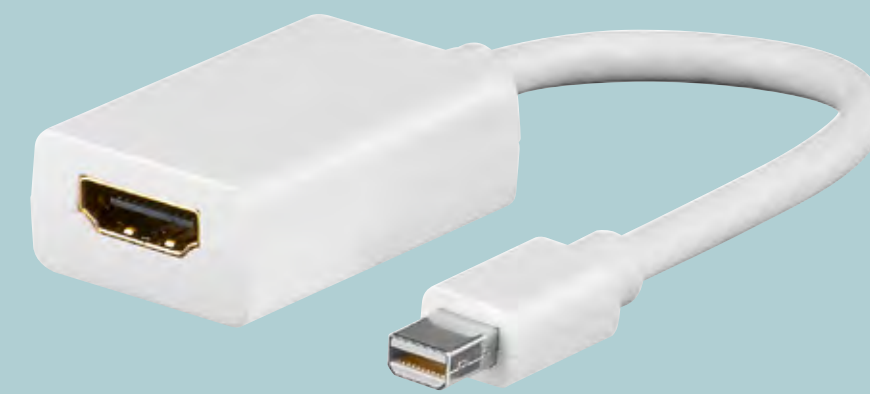

Full HD (1080p)
 0.15 m ● 51729



4K @ 30 Hz
 0.10 m ● 67880

DisplayPort™/DVI-D Adapter Cable
 DisplayPort™ male >
 DVI-I female Dual Link (24+5 pin)



Full HD (1080p)
 0.20 m ● 69873

DisplayPort™/VGA Adapter
 DisplayPort™ male >
 VGA female (15-pin)



Full HD (1080p)
 0.15 m ● 60606

ADAPTERS & CONVERTERS

8K @ 144 Hz



ADAPTERS & CONVERTERS

8K @ 144 Hz / 4K @ 240 Hz

ANGLED ADAPTERS 90°

For an angled connection in confined spaces, e.g. on rear device sockets



DisplayPort™ Angled Adapter 90° Up

● 77129



DisplayPort™ Angled Adapter 90° Down

● 77130



DisplayPort™ Angled Adapter 90° Right

● 77131



DisplayPort™ Angled Adapter 90° Left

● 77132


ADAPTERS & CONVERTERS



DisplayPort™/HDMI™ Adapter
DisplayPort™ male >
HDMI™ female (Type A)

- Signal transmission with resolutions up to WUXGA (1920 x 1200p)
- With mechanical connector lock for secure hold without loose contacts
- Signal transmission: from DisplayPort™ plug to HDMI™ socket

● 51719

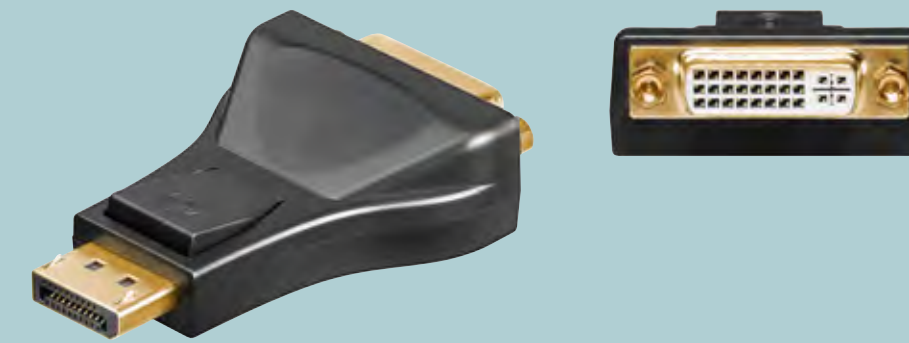

DisplayPort™/DVI-I Adapter
DisplayPort™ male >
DVI-I female Dual Link (24+5 pin)

- Only suitable for unidirectional transmission from DisplayPort™ to DVI
- Supports WQXGA resolutions up to 2560 x 1600 pixels at 60 Hz

● 51720



DisplayPort™/VGA Adapter
DisplayPort™ male >
VGA female (15-pin)

- Only suitable for unidirectional transmission from DisplayPort™ to VGA
- Depending on the connected components, VGA supports resolutions up to 1920 x 1080 pixels (Full HD)
- The locking mechanism on the DisplayPort™ plug provides a stable connection

● 63489

body

AUDIO/VIDEO

SPEAKERS



Speaker Selectors

Full flexibility with just one click: With the switch box, you can operate pairs of speakers individually or together at the touch of a button. Ideal for home cinema setups and for switching between different sound atmospheres. Both models are suitable for speakers with 4–8 ohm impedance and max. 200 W to the amplifier.



- For connecting up to 2 pairs of speakers
- For switching on and off 2 separate monitor pairs fed by a stereo amplifier output
- 2-way speaker selector for speaker cables with max. 4 mm² cable diameter

● 60928



- For connecting up to 4 pairs of speakers
- For switching on and off 4 separate monitor pairs fed by a stereo amplifier output
- 4-way speaker selector for speaker cables with max. 2.5 mm² cable diameter

● 11934



Speaker Terminal 2-pin

Type banana connection

- Audio connection for speaker cable with max. 6 mm diameter or 4 mm banana plug
- Coloured marking on the clamping hole (red/black) facilitates connecting
- 2-pin loudspeaker terminal (mono) with metal caps for installation in audio equipment

Type clamp connection

- Clamp connection for speaker cables with a diameter of 3–4.5 mm
- Coloured marking of the terminals (red/black) facilitates connecting
- Speaker clamp terminal for installation in audio devices, available in mono/stereo versions

Type solder connection

- Audio connection for DIN speaker plug
- Flange with 22 mm hole spacing for a 15 mm diameter mounting hole
- For installation in speakers

Suitable for Recessed Installation

MONO

ROUND



● 11663¹

ANGULAR




● 11698¹

Clamp Connection for Recessed Installation

MONO

2-PIN

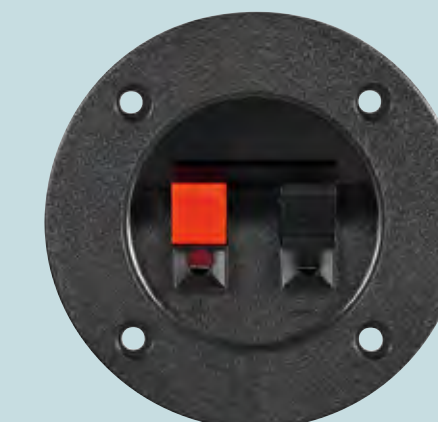

for cable diameter

max. 4 mm

● 11253¹

MONO/STEREO

2-PIN



max. 4.5 mm

● 11251¹


4-PIN



max. 3 mm

● 11252¹

Loudspeaker Chassis Socket with Solder Connection

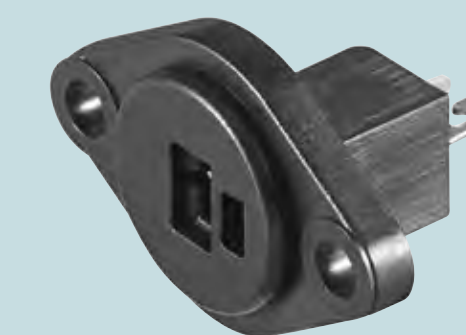

● 11249¹


¹ Minimum order quantity 10 pieces

PLUGS & SOCKETS

Speaker Plug

with screw connection and cable protector

- Loudspeaker plug for assembling speaker cables with 2.5 mm diameter
- Easy mounting by screw connection – no soldering required

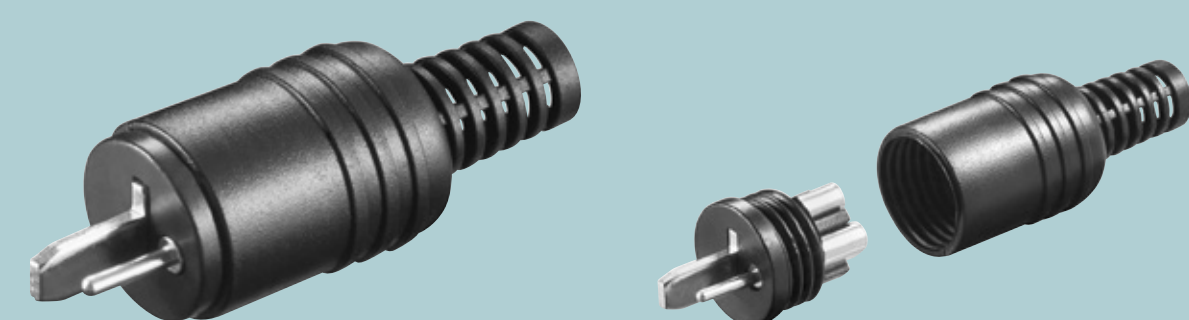


● 11241¹

Speaker Plug, Angled

with screw connection

- Easy mounting by screw connection – no soldering required
- 90°-angled connection for speaker cables

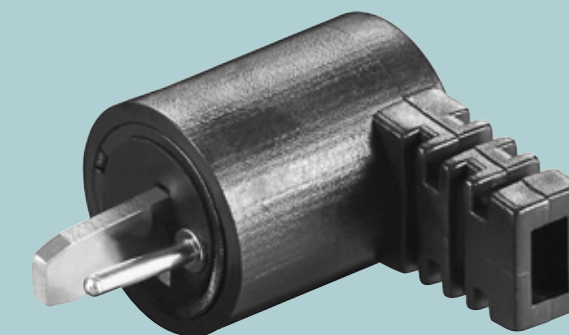


● 11242¹

Speaker Plug

with screw connection

- Mini loudspeaker plug for assembling speaker cables with 2.5 mm diameter
- Easy mounting by screw connection – no soldering required
- 90°-angled connection for speaker cable

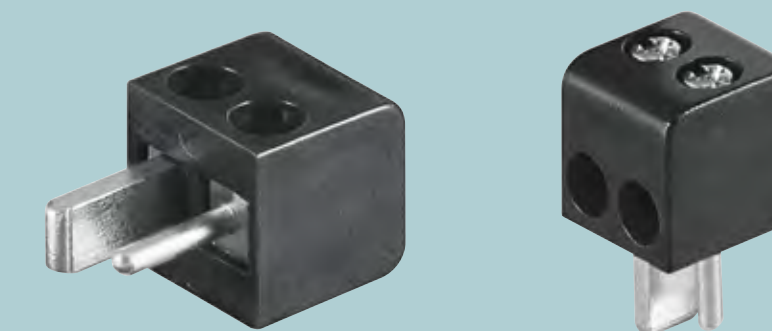

● 11243¹

Speaker Socket

with screw connection and cable protector

- Loudspeaker jack for assembling speaker cables with a 2.5 mm diameter
- Easy mounting by screw connection – no soldering required



● 11246¹

RCA Adapter to Speaker Male

- DIN speaker plug to RCA coupling
- For connecting an RCA cable to a speaker with DIN socket




● 11693¹

Speaker Plug Set

with screw connection, packed in pairs

- 2.5 mm diameter
- Easy mounting by screw connection – no soldering required
- 90°-angled connection for speaker cable

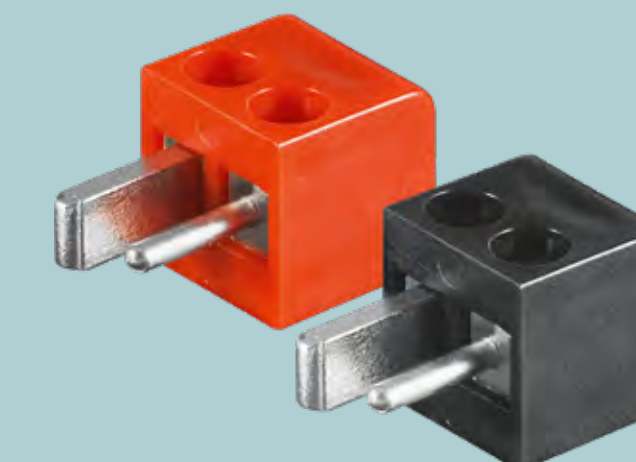

●● 11250¹

¹ Minimum order quantity 10 pieces

PLUGS & SOCKETS

Banana Plug with Screw Connection gold-plated, 4 mm, black coloured ring

- Suitable for cable diameters from 4.5 mm to 5.5 mm



- 11683 ¹
- 11684 ¹

Soft Rubber Stacking Banana Plug 4 mm hole, resistant to impact

- Suitable for assembling speaker cables



- 11399 ¹
- 11459 ¹

Banana Plug with screw connection

- 4.5 mm banana plug



- 11373 ¹
- 11375 ¹

Banana Socket with screw connection

- Suitable for cables with a cross-section of 4 mm²



- 11378 ¹
- 11379 ¹

Banana Chassis Socket with Screw 4 mm connection, with 2 nuts




- 11731 ¹
- 11732 ¹
- 11672 ¹
- 11733 ¹
- 11734 ¹

¹ Minimum order quantity 10 pieces

Speaker Cables

Cable reels with flexible PVC sheath are the practical speaker connection for hi-fi systems, speakers, and amplifiers. Available with stranded wire made of copper-clad aluminium (CCA) and – as an upgrade – high-quality, oxygen-free copper (OFC) for optimised transmission. Compliant with the EU Construction Products Regulation (CPR) and the Eca fire protection class.

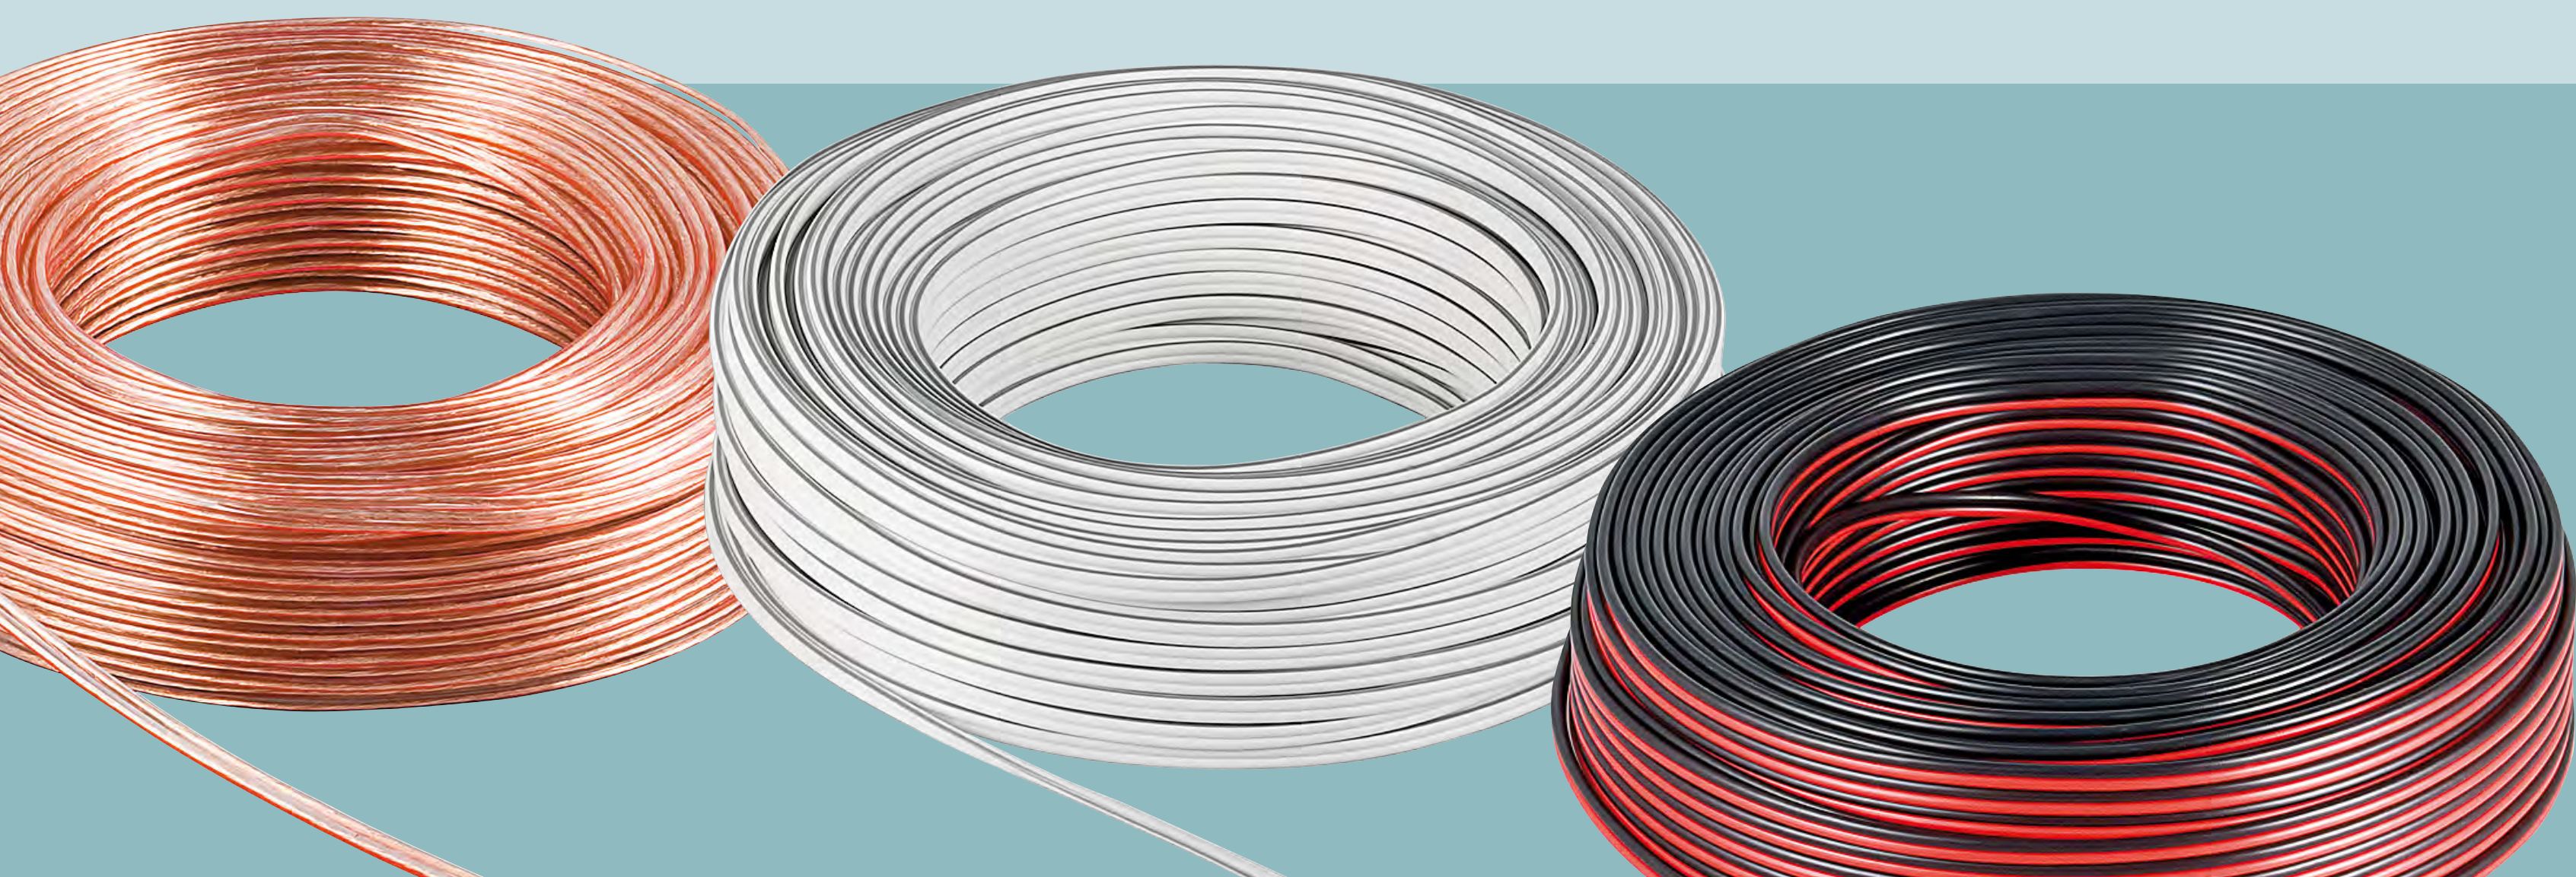



Your choice:
transparent, white or red/black

INSTALLATION/CABLE REELS

COPPER (CU)

OFC (oxygen-free copper)

SPEAKER CABLES

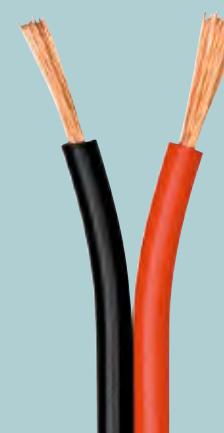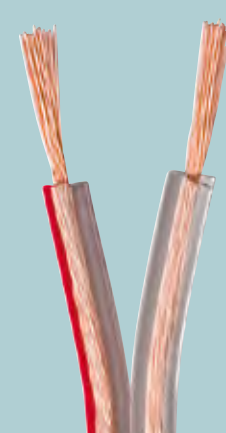

Length	Transparent	White	Red, black	Cross-section	Cable	Cable sheath diameter
10 m	○ 15118	● 15109	● 15089	2 x 0.50 mm ²	2 x 16/0.20 mm	2.2 x 4.4 mm
25 m	○ 15119	● 15110	● 15090	2 x 0.50 mm ²	2 x 16/0.20 mm	2.2 x 4.4 mm
50 m	○ 15120	● 15102	● 15091	2 x 0.50 mm ²	2 x 16/0.20 mm	2.2 x 4.4 mm
100 m	○ 15121	● 15101	● 15086	2 x 0.50 mm ²	2 x 16/0.20 mm	2.2 x 4.4 mm
10 m	○ 15122	● 15112	● 15093	2 x 0.75 mm ²	2 x 58/0.11 mm	2.5 x 5.0 mm
25 m	○ 15123	● 15113	● 15094	2 x 0.75 mm ²	2 x 58/0.11 mm	2.5 x 5.0 mm
50 m	○ 15124	● 15104	● 15080	2 x 0.75 mm ²	2 x 58/0.11 mm	2.5 x 5.0 mm
100 m	○ 15125	● 15103	● 15083	2 x 0.75 mm ²	2 x 58/0.11 mm	2.5 x 5.0 mm
10 m	○ 15126	● 15114	● 15096	2 x 1.50 mm ²	2 x 48/0.19 mm	3.0 x 6.0 mm
25 m	○ 15127	● 15115	● 15097	2 x 1.50 mm ²	2 x 48/0.19 mm	3.0 x 6.0 mm
50 m	○ 15128	● 15106	● 15081	2 x 1.50 mm ²	2 x 48/0.19 mm	3.0 x 6.0 mm
100 m	○ 15129	-	● 15048	2 x 1.50 mm ²	2 x 48/0.19 mm	3.0 x 6.0 mm
10 m	○ 15130	● 15117	● 15099	2 x 2.50 mm ²	2 x 80/0.19 mm	4.0 x 8.0 mm
25 m	○ 15131	● 15116	● 15100	2 x 2.50 mm ²	2 x 80/0.19 mm	4.0 x 8.0 mm
50 m	○ 15132	● 15108	● 15082	2 x 2.50 mm ²	2 x 80/0.19 mm	4.0 x 8.0 mm
100 m	○ 15133	-	● 15085	2 x 2.50 mm ²	2 x 80/0.19 mm	4.0 x 8.0 mm

INSTALLATION/ CABLE REELS


CCA



INSTALLATION/CABLE REELS

COPPER-CLAD ALUMINIUM (CCA)

SPEAKER CABLES

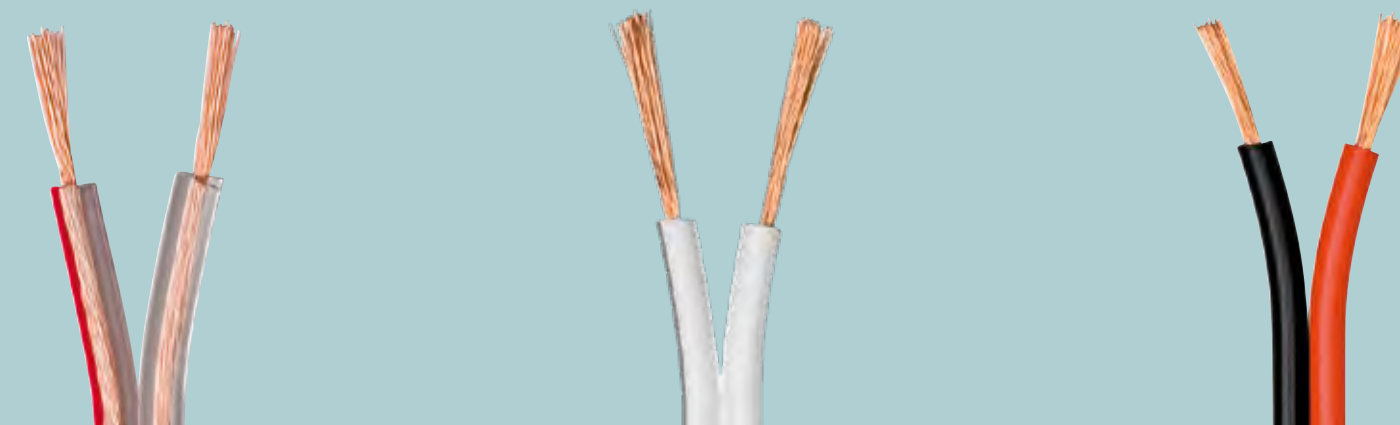

Length	Transparent	White	Red, black	Cross-section	Cable	Cable sheath diameter
100 m	-	-	● 56707	2 x 0.50 mm ²	2 x 16/0.20 mm	2.2 x 4.4 mm
10 m	○ 67719	● 67744	● 67728	2 x 0.75 mm ²	2 x 24/0.20 mm	2.5 x 5.0 mm
25 m	○ 67717	● 67745	● 67730	2 x 0.75 mm ²	2 x 24/0.20 mm	2.5 x 5.0 mm
50 m	○ 67718	● 67746	● 67731	2 x 0.75 mm ²	2 x 24/0.20 mm	2.5 x 5.0 mm
100 m	○ 15018	● 27521	● 15022	2 x 0.75 mm ²	2 x 24/0.20 mm	2.5 x 5.0 mm
100 m	-	-	● 56705	2 x 1.00 mm ²	2 x 32/0.20 mm	2.8 x 5.6 mm
10 m	○ 67720	● 67747	● 67732	2 x 1.50 mm ²	2 x 30/0.25 mm	3.0 x 6.0 mm
25 m	○ 67721	● 67748	● 67733	2 x 1.50 mm ²	2 x 30/0.25 mm	3.0 x 6.0 mm
50 m	○ 67722	● 67749	● 67734	2 x 1.50 mm ²	2 x 30/0.25 mm	3.0 x 6.0 mm
100 m	○ 15019	● 27523	● 15023	2 x 1.50 mm ²	2 x 30/0.25 mm	3.0 x 6.0 mm
10 m	○ 67723	● 67750	● 67735	2 x 2.50 mm ²	2 x 50/0.25 mm	3.8 x 8.0 mm
25 m	○ 67724	● 67751	● 67736	2 x 2.50 mm ²	2 x 50/0.25 mm	3.8 x 8.0 mm
50 m	○ 52082	● 67752	● 67737	2 x 2.50 mm ²	2 x 50/0.25 mm	3.8 x 8.0 mm
100 m	○ 15020	● 27525	● 15024	2 x 2.50 mm ²	2 x 50/0.25 mm	3.8 x 8.0 mm
10 m	○ 67726	● 67741	● 67738	2 x 4.00 mm ²	2 x 81/0.25 mm	5.0 x 10.0 mm
25 m	○ 67727	● 67742	● 67739	2 x 4.00 mm ²	2 x 81/0.25 mm	5.0 x 10.0 mm
50 m	○ 67729	● 67743	● 67740	2 x 4.00 mm ²	2 x 81/0.25 mm	5.0 x 10.0 mm
100 m	○ 15021	● 15138	● 15025	2 x 4.00 mm ²	2 x 81/0.25 mm	5.0 x 10.0 mm


AUDIO/VIDEO

STEREO/MONO



AUX Audio Cables

Audio cables with jack plugs are the handy connection for headphones, speakers and musical instruments. The plugs lock securely into place and ensure the clearest sound quality – no loose connections, just the pure joy of sound.

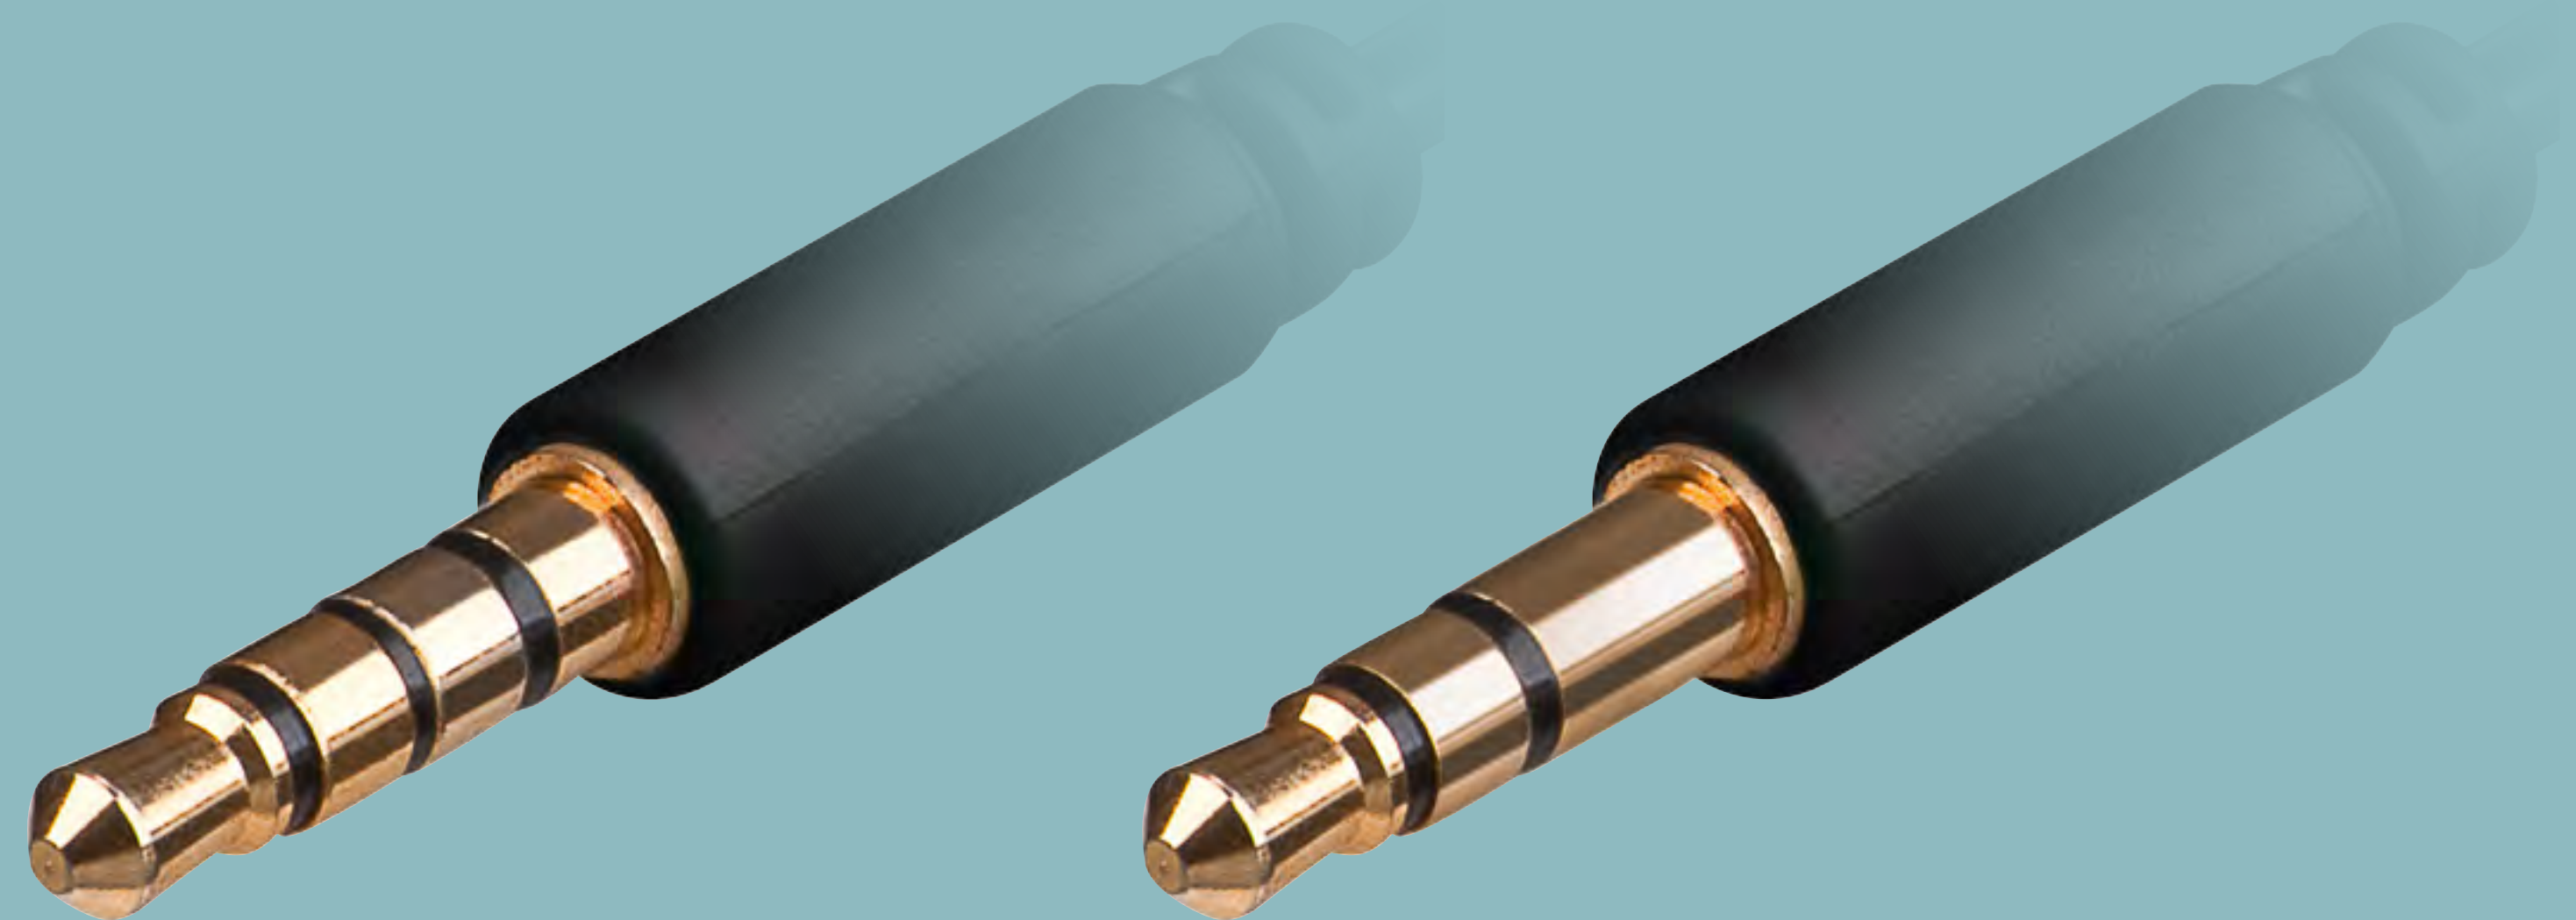

4-PIN

3-PIN



- Enjoy music, podcasts or films
- Connect audio output devices
- Plugs lock securely into place

CONNECTOR CABLES

SLIM

STEREO


4-PIN



3.5 mm male (4-pin, stereo) >
3.5 mm male (4-pin, stereo)

0.50 m	●	63824
1.00 m	●	63826
1.50 m	●	63828
2.00 m	●	63830
3.00 m	●	63832

3-PIN

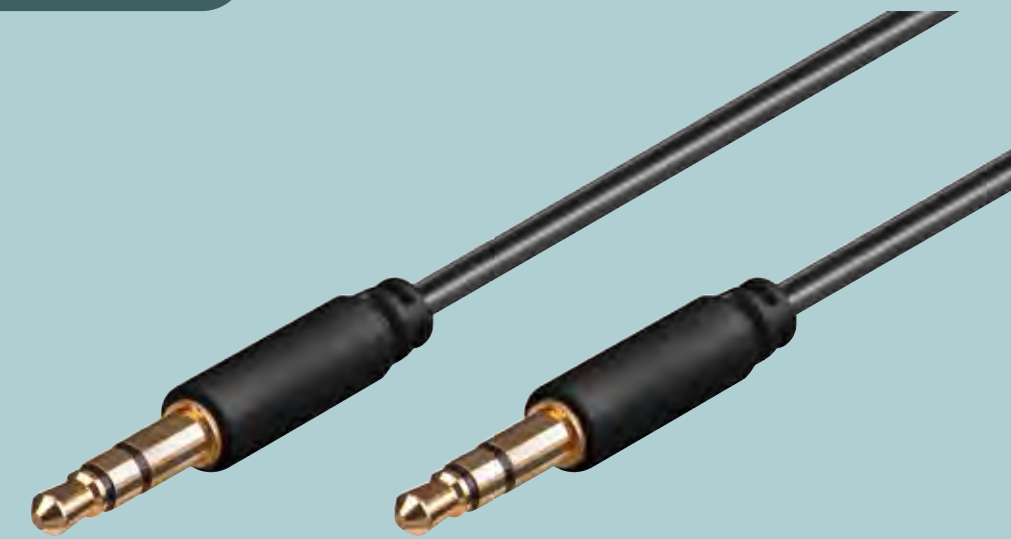


3.5 mm male (3-pin, stereo) >
3.5 mm male (3-pin, stereo)

0.50 m	●	69116
1.00 m	●	69117
1.50 m	●	69106
2.00 m	●	69107
3.00 m	●	69108

3-PIN

90°

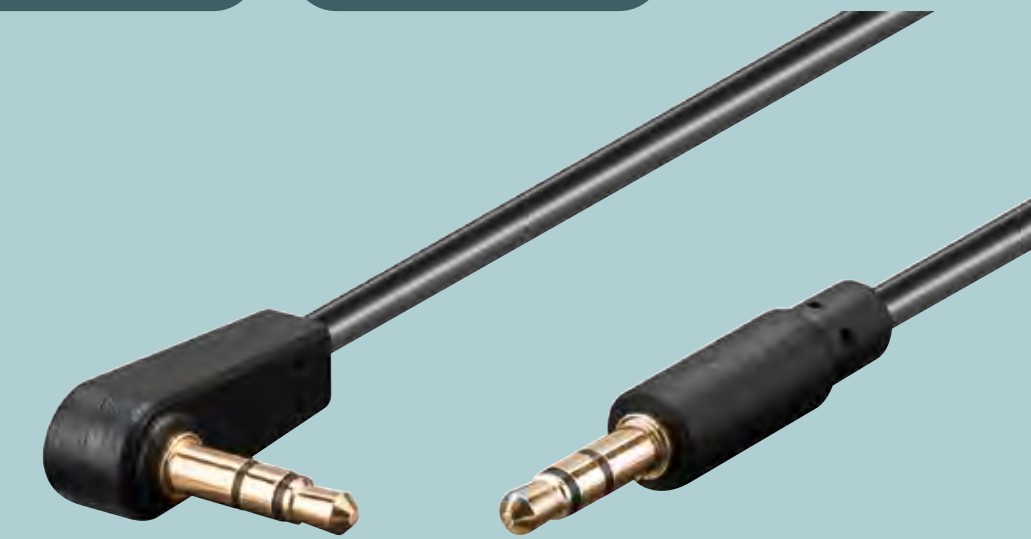

3.5 mm male (3-pin, stereo) >
3.5 mm male (3-pin, stereo) 90°

0.50 m	●	67782
1.00 m	●	67783
1.50 m	●	67784
2.00 m	●	59525
3.00 m	●	59526

The Sound of Goobay Plus

Goobay Plus jack cables are the quality upgrade among audio cables. With their braided textile sheath, slim metal plugs and secure bend protection, they guarantee clear sound, stylish design and maximum quality.



Audio Connection Cable AUX

3.5 mm male (3-pin, stereo) > 3.5 mm male (3-pin, stereo)

3-PIN

STEREO



Audio Connection Cable AUX, 90°

3.5 mm male (3-pin, stereo) > 3.5 mm male (3-pin, stereo) 90°

3-PIN

STEREO

90°



AUDIO CONNECTION CABLES



GOOBAY PLUS

STEREO



0.50 m	●	65272
1.00 m	●	65273
2.00 m	●	65274
3.00 m	●	65275
5.00 m	●	65276

3.5 mm male (3-pin, stereo) >
3.5 mm male (3-pin, stereo)

GOOBAY PLUS || 90°


STEREO



0.50 m	●	65277
1.00 m	●	65278
2.00 m	●	65279
3.00 m	●	65282
5.00 m	●	65283

3.5 mm male (3-pin, stereo) >
3.5 mm male (3-pin, stereo) 90°

STEREO

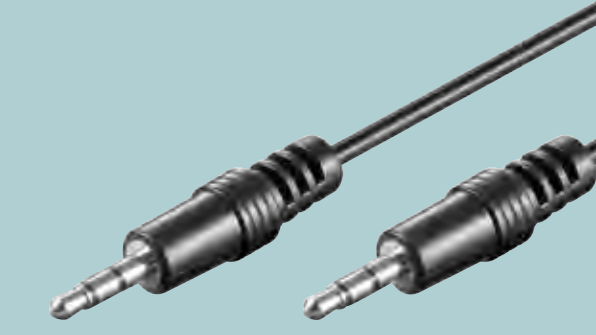

0.60 m	●	51141
1.50 m	●	51658
2.50 m	●	51659
5.00 m	●	51660
10.0 m	●	51661

3.5 mm male (3-pin, stereo) >
3.5 mm male (3-pin, stereo)

FLAT

STEREO



1.50 m	●	50019
2.50 m	●	50449
5.00 m	●	50430
10.0 m	●	50931

3.5 mm male (3-pin, stereo) >
3.5 mm male (3-pin, stereo)

STEREO



2.00 m	●	50459
--------	---	-------

3.5 mm male (3-pin, stereo) >
2.5 mm male (3-pin, stereo)

MONO



1.50 m	●	50460
--------	---	-------

3.5 mm male (2-pin, mono) >
3.5 mm male (2-pin, mono)

AUDIO
EXTENSION
CABLES


STEREO



AUDIO EXTENSION CABLES

STEREO


4-PIN
SLIM

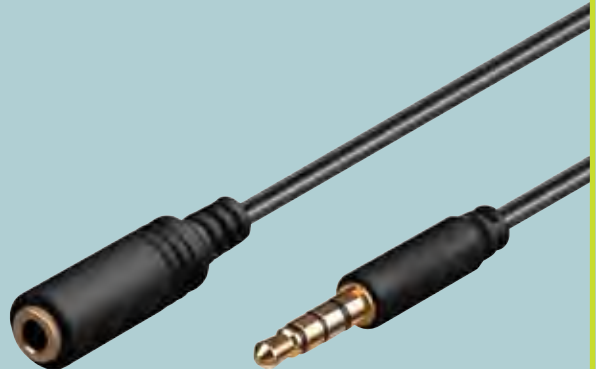

0.50 m	● 62476	● 62359
1.00 m	● 62477	● 62360
1.50 m	● 62478	● 62361
2.00 m	● 62479	● 62362
3.00 m	● 62480	● 62363
5.00 m	● 62481	● 62364

3.5 mm male (4-pin, stereo) >
3.5 mm female jack (4-pin, stereo)


3-PIN
SLIM



0.50 m	● 97111
1.00 m	● 97113
1.50 m	● 97116
2.00 m	● 97118
3.00 m	● 97120
5.00 m	● 97122

3.5 mm male (3-pin, stereo) >
3.5 mm female (3-pin, stereo)


3-PIN



2.00 m	● 50431
3.00 m	● 50432
5.00 m	● 50090
10.0 m	● 50935

3.5 mm male (3-pin, stereo) >
3.5 mm female (3-pin, stereo)


3-PIN
COILED



5.00 m	● 50017
--------	---------

3.5 mm male (3-pin, stereo) >
3.5 mm female (3-pin, stereo)


3-PIN
COILED



5.00 m	● 50016
--------	---------

6.35 mm male (3-pin, stereo) >
6.35 mm female (3-pin, stereo)


3-PIN



5.00 m	● 50428
--------	---------

6.35 mm male (3-pin, stereo) >
6.35 mm female (3-pin, stereo)

3-PIN



1.50 m	● 50458
--------	---------

2.5 mm male (3-pin, stereo) >
2.5 mm female (3-pin, stereo)



Easy connection with RCA

Audio adapter cables with jack and RCA connectors are the perfect connection between laptops, smartphones or home cinema systems and output devices such as speakers, amplifiers, TVs or soundbars. The red and white colour coding makes connection easy.



GOOBAY PLUS

Audio Adapter Cable AUX, 3.5 mm Jack to Stereo RCA Plug
3.5 mm male (3-pin, stereo) > 2 RCA male (audio left/right)

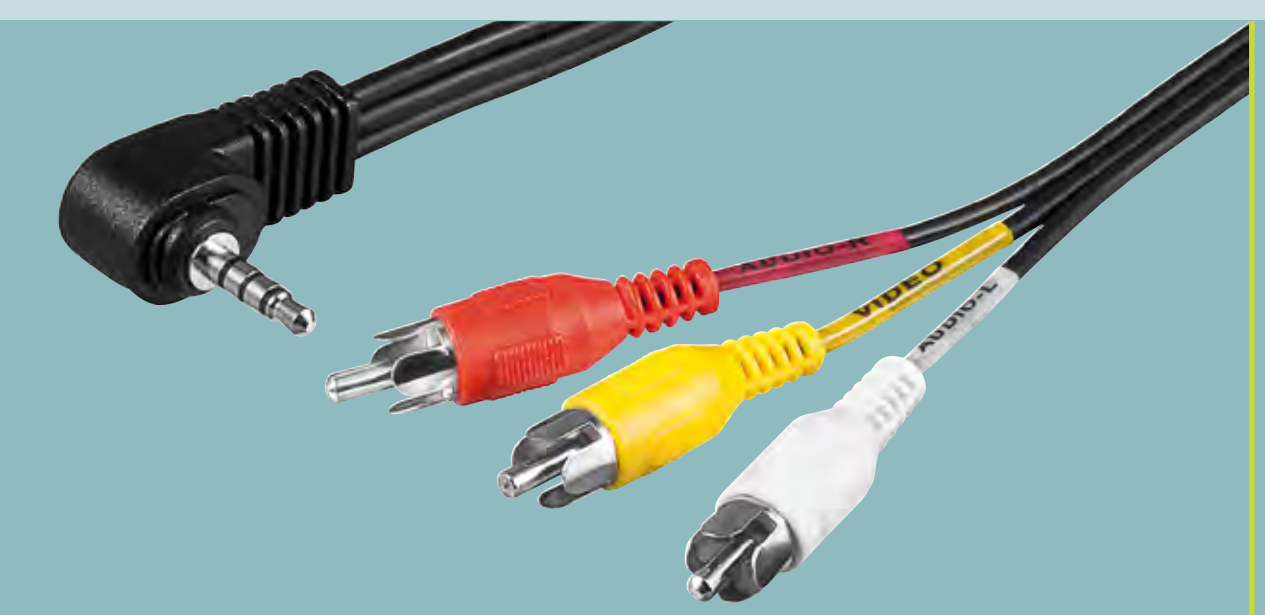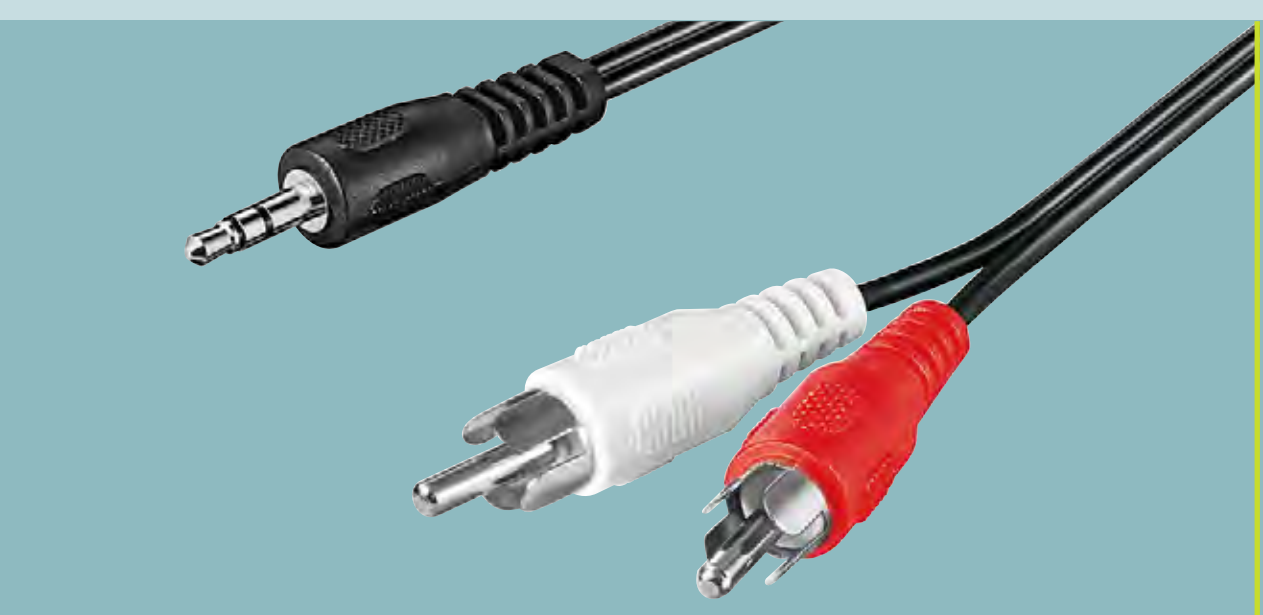

Adapter Cable, Composite Audio/Video to 3.5 mm
3.5 mm male (4-pin, stereo) 90° > 3 RCA male

CU
inner conductors made of pure copper

GOLD-PLATED

0.50 m	●	65284
1.00 m	●	65285
2.00 m	●	65288
3.00 m	●	65289
5.00 m	●	65290

CCS
inner conductors made of copper clad steel

0.50 m	●	50440
1.50 m	●	50018
3.00 m	●	50196
5.00 m	●	50195
10.0 m	●	50441
15.0 m	●	50780
20.0 m	●	50779

CU
inner conductors made of pure copper

0.50 m	●	51701
1.00 m	●	51648
1.50 m	●	51649
3.00 m	●	51650
5.00 m	●	51651
10.0 m	●	51652

1.50 m ● 50209



ADAPTERS & CONVERTERS

PC Headset Adapter,
1x 3.5 mm AUX 4-Pin to
2x 3.5 mm AUX 3-Pin
3.5 mm male (4-pin, stereo) >
2 pcs. 3.5 mm female (3-pin,
stereo)



0.30 m ● 50467

3.5 mm Audio Y Cable Adapter,
1x Male to
2x Female Stereo
3.5 mm male (3-pin, stereo) >
2 pcs. 3.5 mm female (3-pin,
stereo)



0.20 m ● 50464

3.5 mm Audio Y Cable Adapter,
1x Male to
2x Female Mono

3.5 mm male (3-pin, stereo) > 2
pcs. 3.5 mm female (2-pin, mono)



0.20 m ● 50465

Headphone Adapter,
3.5 mm Male to 6.35 mm Female

3.5 mm male (3-pin, stereo) >
6.35 mm female (3-pin, stereo)



0.20 m ● 50470

3.5 mm Audio Cable Adapter,
Male to Stereo RCA Female
3.5 mm male (3-pin, stereo) >
2 RCA female (audio left/right)



0.20 m ● 50600
1.50 m ● 50116

Audio Cable Adapter,
3.5 mm Female to RCA Male
3.5 mm female (3-pin, stereo) >
2 RCA male (audio left/right)



0.20 m ● 50092
1.40 m ● 50442

3.5 mm Audio Y Cable Adapter,
1x Stereo Female to 2x Mono Male
3.5 mm female (3-pin, stereo) >
2 pcs. 3.5 mm male (2-pin, mono)



0.20 m ● 50472




ADAPTERS & CONVERTERS

AUDIO ADAPTERS

- For connecting headphones or speakers with multimedia devices such as hi-fi systems or home cinema systems

Adapter, 6.35 mm to 2x 3.5 mm
1x 6.35 mm jack plug (3-pin, stereo) >
2x 3.5 mm jack coupling (3-pin, stereo)

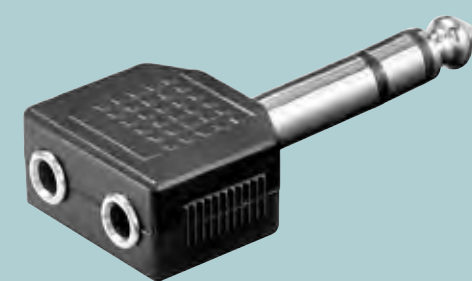


● 11103¹

Adapter, 3.5 mm Jack 1-to-2
1x 3.5 mm jack plug (3-pin, stereo) >
2x 3.5 mm jack coupling (3-pin, stereo)



● 11104¹

**Plane/Travel
Headphone Adapter**
2x 3.5 mm jack plug
(2-pin, mono) >
1x 3.5 mm jack socket
(3-pin, stereo)

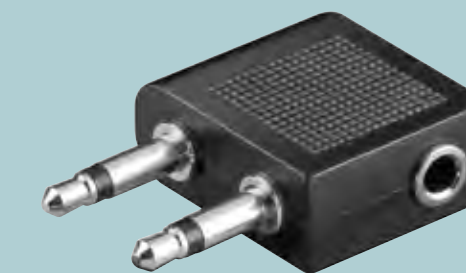

● 61004¹

Adapter, 6.35 mm Male to 2x Stereo Female
1x 6.35 mm jack plug (3-pin, stereo) >
2x RCA socket (audio left/right)



● 11615¹

Adapter, 3.5 mm Male to 2x Stereo Female
1x 3.5 mm jack plug (3-pin, stereo) >
2x RCA socket (audio left/right)



● 11604¹

¹ Minimum order quantity 10 pieces


ADAPTERS & CONVERTERS

STEREO/MONO




ADAPTERS & CONVERTERS

Adapter, 6.35 mm to 3.5 mm
1x 6.35 mm jack plug (3-pin, stereo) >
1x 3.5 mm jack socket (3-pin, stereo)

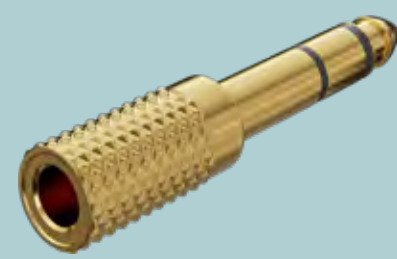


● 11062¹

Adapter, 6.35 mm to 3.5 mm
1x 6.35 mm jack plug (3-pin, stereo) >
1x 3.5 mm jack coupling (3-pin, stereo)

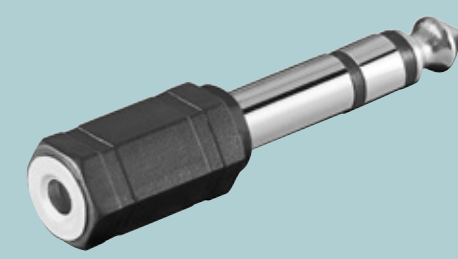


● 11100¹

Adapter, 6.35 mm (mono) to RCA
1x 6.35 mm jack plug (2-pin, mono) >
1x RCA socket

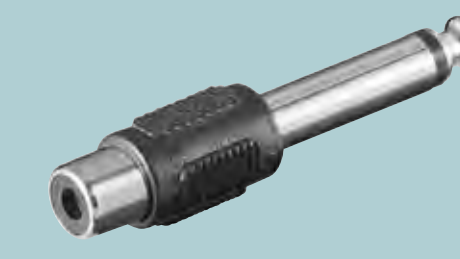

● 11118¹

Adapter, 3.5 mm to 6.35 mm
1x 3.5 mm jack plug (3-pin, stereo) >
1x 6.35 mm jack socket (3-pin, stereo)

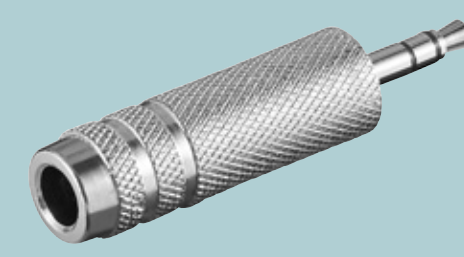

● 12421¹

Adapter, 3.5 mm to 6.35 mm
1x 3.5 mm jack plug (3-pin, stereo) >
1x 6.35 mm jack socket (3-pin, stereo)



● 11101¹

ADAPTERS & CONVERTERS


STEREO/MONO



¹ Minimum order quantity 10 pieces

ADAPTERS & CONVERTERS

Adapter, 3.5 mm to 2.5 mm
1x 3.5 mm jack plug (3-pin, stereo) >
1x 2.5 mm jack socket (3-pin, stereo)

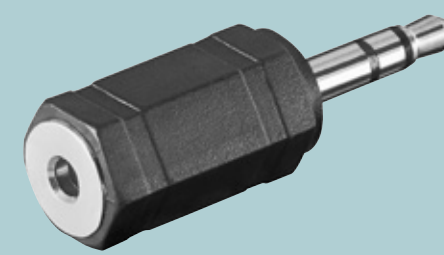


● 11898 ¹

Adapter, 2.5 mm to 3.5 mm
1x 2.5 mm jack plug (3-pin, stereo) >
1x 3.5 mm jack socket (3-pin, stereo)




● 11897 ¹

Adapter, 3.5 mm Mono to Stereo
1x 3.5 mm jack plug (2-pin, mono) >
1x 3.5 mm jack socket (3-pin, stereo)

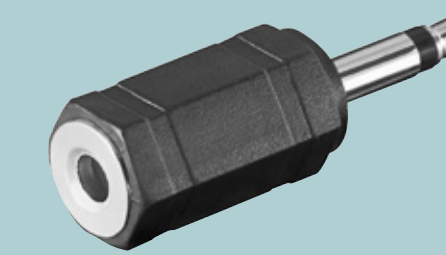


● 11117 ¹

Adapter, 6.35 mm Socket to Socket
1x 6.35 mm jack socket (3-pin, stereo) >
1x 6.35 mm jack socket (3-pin, stereo)

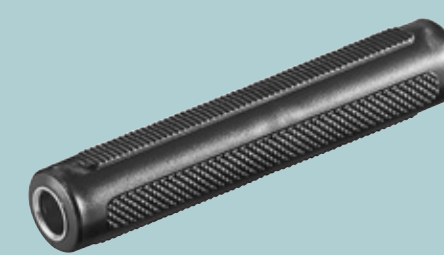

● 11853 ¹

Adapter, 3.5 mm Socket to Socket
1x 3.5 mm jack socket (3-pin, stereo) >
1x 3.5 mm jack socket (3-pin, stereo)

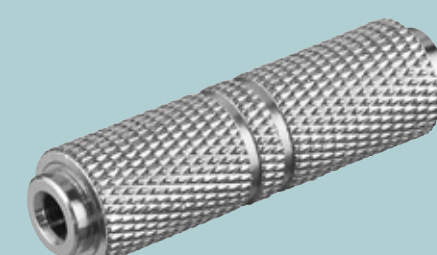

● 11884 ¹

PLUGS &
SOCKETS

STEREO/MONO



¹ Minimum order quantity 10 pieces

PLUGS & SOCKETS

STEREO

MONO

STEREO

MONO

STEREO


MONO

STEREO

MONO

JACK PLUG


6.35 mm
3-pin, stereo | 2-pin, mono
• Gold-plated housing

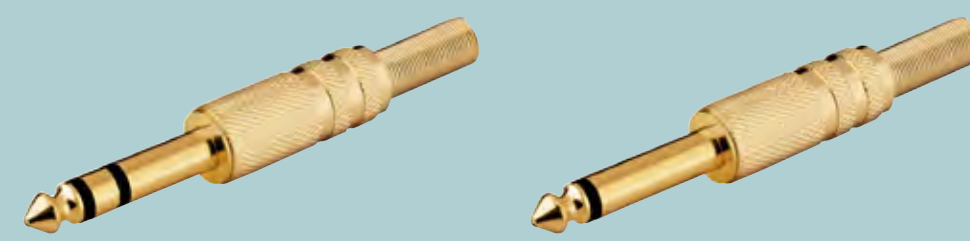

11038¹

11024¹

6.35 mm
3-pin, stereo | 2 pin, mono
• Robust metal housing

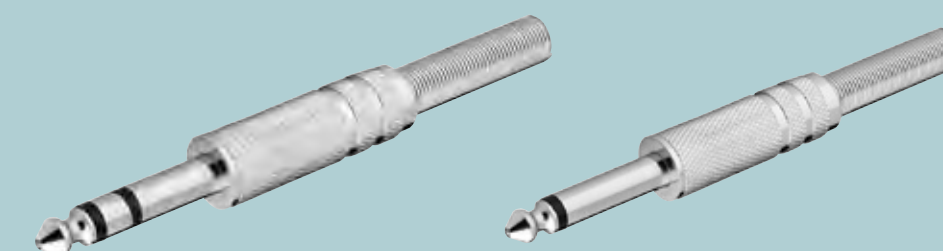

11037¹

11023¹


6.35 mm
3-pin, stereo) | 2 pin, mono
• Plastic housing



11036¹

11022¹

6.35 mm
angled, 2-pin
• Robust metal housing

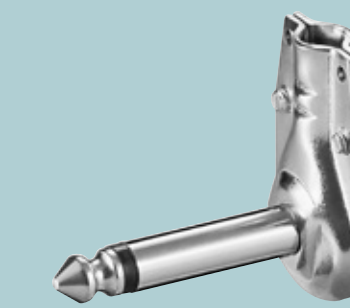


11040¹

3.5 mm
4-pin
• Robust metal housing



27693¹

3.5 mm
4-pin
• Plastic housing

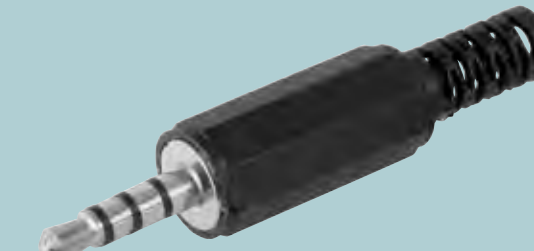


11578¹

3.5 mm
3-pin
• Gold-plated housing



11018¹


3.5 mm
3-pin, stereo | 2-pin, mono
• Robust metal housing

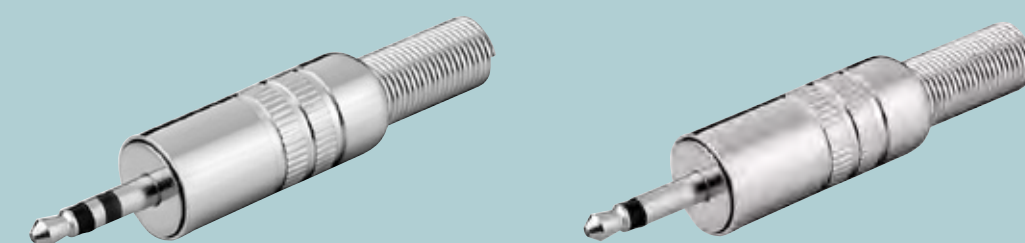

11017¹

11012¹


3.5 mm
3-pin, stereo | 2-pin, mono
• Plastic housing

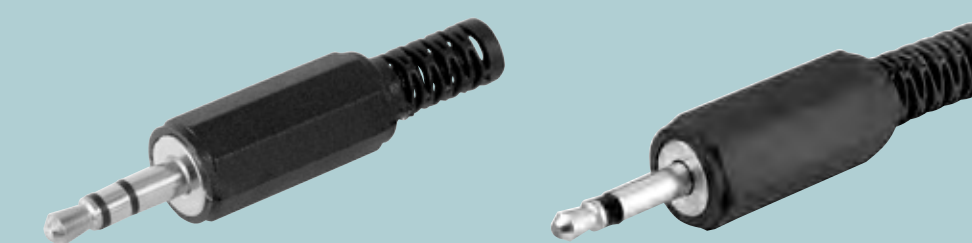

11016¹

11011¹

2.5 mm
3-pin
• Plastic housing

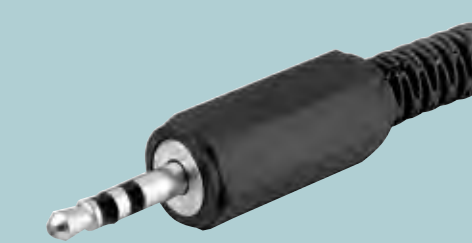

11005¹

¹ Minimum order quantity 10 pieces

PLUGS & SOCKETS

STEREO/MONO



PLUGS & SOCKETS

STEREO

STEREO

MONO

STEREO


JACK SOCKET

6.35 mm
3-pin
• Gold-plated housing



● 11072 ¹


6.35 mm
3-pin, stereo | 2-pin, mono
• Metal housing

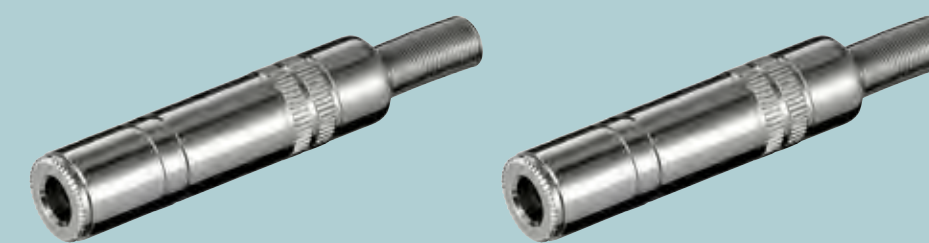

● 11071 ¹


● 11067 ¹

6.35 mm
3-pin
• Plastic housing

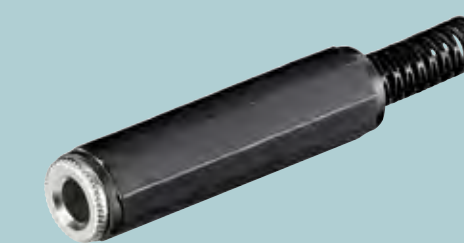

● 11070 ¹

3.5 mm
3-pin
• Metal housing

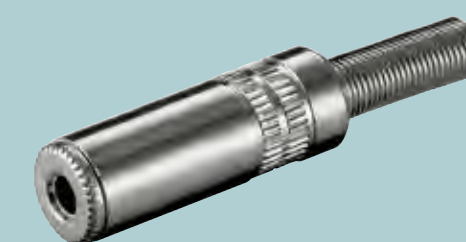

● 11060 ¹

3.5 mm
3-pin
• Plastic housing



● 11059 ¹

INSTALLATION & ACCESSORIES

STEREO/MONO



¹ Minimum order quantity 10 pieces

INSTALLATION & ACCESSORIES

JACK CHASSIS SOCKET

- Solder sockets for installation in audio applications, e.g. in music equipment such as electric guitars, amplifiers, effects pedals, power amplifiers, microphones or mixing consoles
- Solder mounting required

STEREO

6.35 mm – Stereo
3-pin




● 11096 ¹

MONO

6.35 mm – Mono with Switch Contact
2-pin



● 11095 ¹

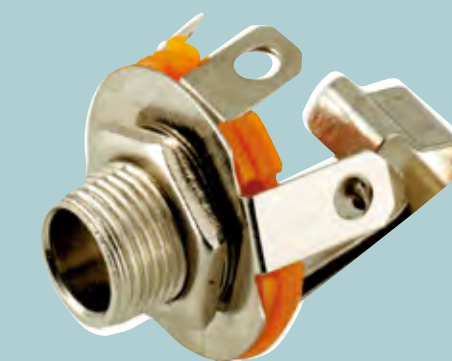

● 11084 ¹

3.5 mm – Mono with Switch Contact
2-pin




● 11093 ¹

6,35 mm – Mono
2-pin



● 11083 ¹

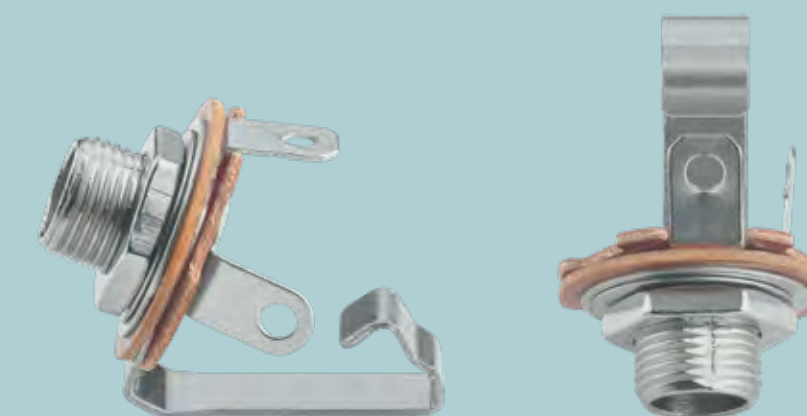

¹ Minimum order quantity 10 pieces



AUDIO/VIDEO

DIGITAL OPTO



TOSLINK Cable

Fibre optic technology takes digital home cinema systems to the next level, providing amazing sound experiences. The glass fibre core of the cable enables loss-free transmission over long distances, as the optical signals are insensitive to electromagnetic interference.



- For perfectly synchronised playback
- Optical glass-fibre audio cable
- Bridges long distances without loss




CONNECTION CABLES




TOSLINK CABLES

GOOBAY PLUS || Ø 6.5 MM

	1,00 m ● 65304
	2,00 m ● 65305
	3,00 m ● 65306
	5,00 m ● 65307
	10,0 m ● 65308


TOSLINK Cable, Ø 6.5 mm
TOSLINK male > TOSLINK male

Ø 5 MM

	0,50 m ● 50564
	1,00 m ● 50217
	1,50 m ● 51221
	2,00 m ● 50565
	5,00 m ● 51222
	5,00 m ● 51223
	10,0 m ● 50937

TOSLINK Cable, Ø 5 mm
TOSLINK male > TOSLINK male

Ø 2.2 MM

	0,50 m ● 50563
	1,00 m ● 50216
	1,50 m ● 51217
	2,00 m ● 50447
	5,00 m ● 51218
	5,00 m ● 51219
	10,0 m ● 50938

TOSLINK Cable, Ø 2.2 mm
TOSLINK male > TOSLINK male




Ø 4 MM

	1,00 m ● 41594
	2,00 m ● 41595

TOSLINK Cable Angled, Rotatable
TOSLINK male > 90° TOSLINK male

Ø 2.2 MM

	1,00 m ● 51224
	2,00 m ● 51225

TOSLINK to Mini-TOSLINK Cable,
Ø 2.2 mm
3.5 mm Mini-TOSLINK male >
TOSLINK male

ADAPTERS & CONVERTERS



ADAPTERS & CONVERTERS

TOSLINK DIGITAL AUDIO ADAPTERS

- Gold-plated contacts for a perfect sound quality without interference
- Optimal results in combination with an optical cable and modern audio components
- Due to the transmission of digital and optical signals insensitive to electromagnetic interference sources

TOSLINK Digital Audio Adapter

90° Angled

360° rotatable TOSLINK male > TOSLINK female



● 11925 ¹

Adapter, Mini-TOSLINK to TOSLINK

3.5 mm Mini-TOSLINK female > TOSLINK male



● 11924 ¹

Adapter, TOSLINK to Mini-TOSLINK

3.5 mm Mini-TOSLINK male > TOSLINK female



● 11922 ¹

TOSLINK female

TOSLINK female > TOSLINK female



● 11926 ¹

TOSLINK 1-to-2 Digital Audio Splitter

TOSLINK female > 2x TOSLINK female



● 11921

Coaxial-Opto Converter

TOSLINK female > RCA female



● 11918

Opto-Koaxial-Audio-Wandler

RCA female > TOSLINK female



● 11919

¹ Minimum order quantity 10 pieces



AUDIO/VIDEO

RCA



RCA Cables

The guarantee for impressive sound and entertainment experiences. Suitable for most common subwoofers, speakers or hi-fi systems, for connection to receivers, amplifiers, CD players or mixing desks.

GOOBAY PLUS

- Highly flexible premium RCA cable with slim metal plugs, bend protection and a colour-matched textile cable
- The braided textile sheath provides a pleasant feel and is gentle on sensitive surfaces
- The gold-plated RCA plugs prevent corrosion and are especially durable



goobay®

- For connecting hi-fi devices
- Especially suitable for cabling home cinema systems



CONNECTION CABLES

STEREO



Stereo RCA Cable
 2x RCA male (audio left/right) >
 2x RCA male (audio left/right)

GOOBAY PLUS



0.50 m	●	65291
1.00 m	●	65292
2.00 m	●	65293
3.00 m	●	65294
5.00 m	●	65295

Stereo RCA Cable 2x RCA
 2x RCA male > 2x RCA male

- Robust, flexible PVC connection cable with inner conductor made of pure OFC copper (coaxial construction)



0.20 m	●	50433
1.50 m	●	50032
2.00 m	●	60795
3.00 m	●	50119
5.00 m	●	50120
10.0 m	●	50434

Stereo RCA Cable 2x RCA
 2x RCA male (audio left/right) >
 2x RCA male (audio left/right)



0.50 m	●	50097
1.50 m	●	50028
2.50 m	●	50029
5.00 m	●	50030
10.0 m	●	50031
15.0 m	●	50340
20.0 m	●	50341

Stereo Connector Cable, RCA with Passthrough
 2x RCA male > 2x RCA male/female



1.50 m	●	50214
--------	---	-------

Stereo Extension Cable 2x RCA
 2x RCA male (audio left/right) >
 2x RCA female (audio left/right)



1.50 m	●	50025
2.50 m	●	50026
5.00 m	●	50027
10.0 m	●	50437




CONNECTION CABLES



Coaxial Digital/Audio Connector Cable, RCA S/PDIF


RCA male > RCA male

- Coaxial RG59 cable

	2.00 m	● 50267
	5.00 m	● 50435
	10.0 m	● 50337
	15.0 m	● 50338
	20.0 m	● 50339

Mono RCA Connector Cable


RCA male > RCA male

	2.00 m	● 50038
---	--------	---------

Car Hi-Fi Stereo RCA Connector Cable

2x RCA male > 2x RCA male


- Cable with coaxial construction
- Inner conductor made of 99.9 % oxygen-free copper (OFC) with 2-fold shielding

	5.00 m	● 50175
---	--------	---------

Composite Audio/Video Connector Cable, 3x RCA with RG59 Video Cable

3x RCA male > 3x RCA male


- 1x video RG 59/U, 2x audio L/R

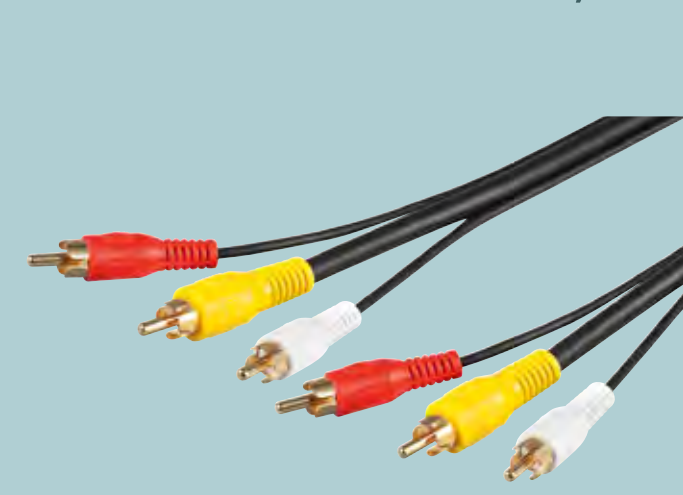	1.50 m	● 50139
	5.00 m	● 50140
	10.0 m	● 50310
	15.0 m	● 50342

Composite Audio/Video Connector Cable 3x RCA

3x RCA male > 3x RCA male

- 1x video, 2x audio L/R


	1.50 m	● 50380
	2.00 m	● 50381
	3.00 m	● 50382
	5.00 m	● 50383
	10.0 m	● 50770

GOOBAY PLUS

Mono RCA Cable

RCA male (woofer, center) >


RCA male (woofer, center)

	2.00 m	● 65296
	3.00 m	● 65297
	5.00 m	● 65298
	10.0 m	● 65299

RCA Y-Cable

RCA male (woofer, center) >

2x RCA male (woofer)

	2.00 m	● 65300
	3.00 m	● 65301
	5.00 m	● 65302
	10.0 m	● 65303

ADAPTERS & CONVERTERS



ADAPTERS & CONVERTERS

AUDIO Y-CABLE ADAPTERS

2x RCA Male to 1x Stereo RCA Female
RCA female > 2 RCA male (audio left/right)



OFC*


0.20 m ● 50375

1x Stereo RCA Male to 2x RCA Female
RCA male > 2 RCA female (audio left/right)



OFC*

0.20 m ● 50930

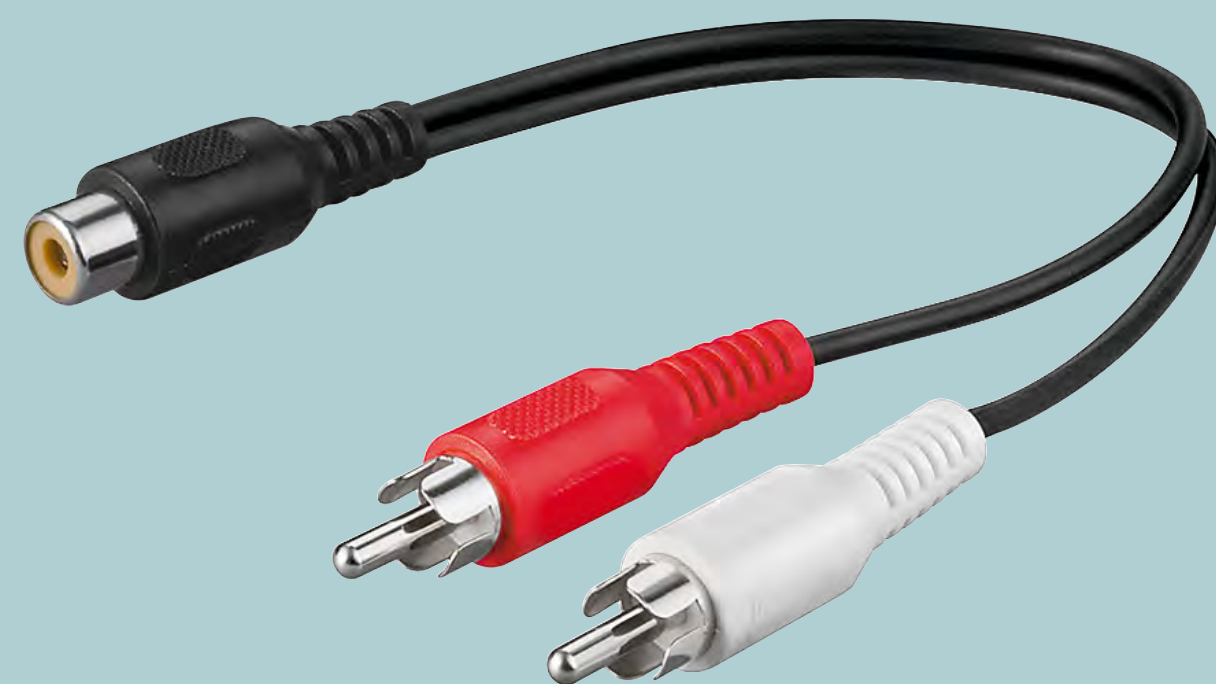

0.20 m ● 50008



0.20 m ● 50005

* OFC (99.9 % oxygen-free copper)



ADAPTERS & CONVERTERS

RCA CONNECTORS

- Ideal for extending audio cables
- Suitable for use in home cinema systems, speakers, amplifiers, hi-fi systems, DJ mixing consoles, etc.

RCA Y-Adapters

1x RCA plug > 2x RCA sockets



- 11387
- 11388

RCA Angle Adapters

90°


Gold Version with gold-plated contacts



- 11590¹
- 11591¹
- 11685¹
- 11686¹

RCA Double Connectors, Socket

2x RCA female > 2x RCA female

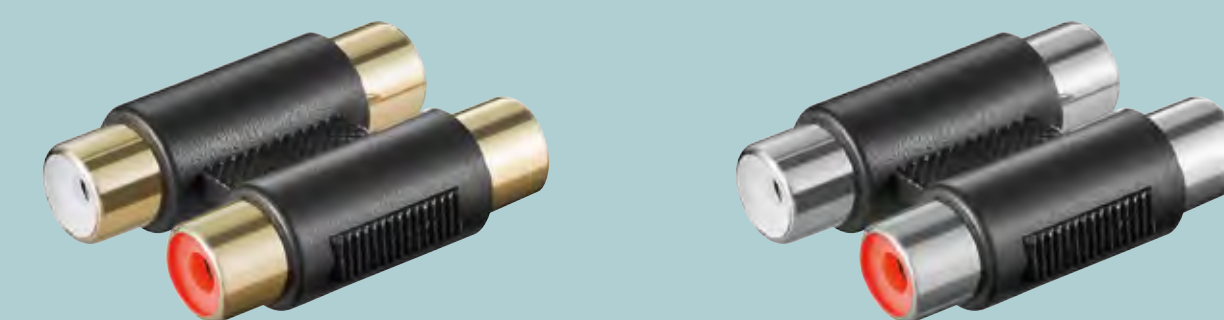

- gold-plated
- 12419¹
- nickel-plated
- 11607¹

Male to Male

RCA plug > RCA plug
Gold Version



- 11596¹
- 11609¹

Female to Female

1x RCA female > 1x RCA female
Metal Version



- 11614¹
- 11608¹

¹ Minimum order quantity 10 pieces

PLUGS & COUPLINGS

RCA PLUGS

- Suitable for assembling audio cables or as a replacement for defective audio plugs
- For use in home cinema systems, speakers, amplifiers, hi-fi systems, DJ mixing consoles, etc.

RCA Plugs

Ø CABLE 7 mm

gold-plated housing



- 11617¹
- 11616¹

Ø CABLE 5.4 mm

gold-plated housing



- 11281¹
- 11280¹

Ø CABLE 6.5 mm

metal version with gold plated contacts



- 11905¹
- 11904¹

plastic version with bend protection



- 11277¹
- 11276¹
- 11602¹

RCA Built-in Jack

for flush mounting, with insulation and solder connection

gold design with with coloured insulation discs



- 11308¹
- 11307¹

¹ Minimum order quantity 10 pieces



S-Video Connector Cable
Mini-DIN 4 male (S-Video) > Mini-DIN 4 male (S-Video)



1.00 m	● 50057
2.00 m	● 50058
5.00 m	● 50059

**Audio Cable Adapter,
DIN Male to Stereo RCA Male**
DIN male 180° (5-pin) > 2 RCA male (audio left/right)



1.50 m	● 50014
--------	---------

AUDIO/VIDEO

S-VIDEO



SCART Cable

SCART Connection Cable, ø 7 mm
SCART male (21-pin) > SCART male (21-pin)



- 0.60 m ● 11762
- 1.50 m ● 11702
- 2.00 m ● 11703

Adapter Cable,
SCART to Composite Audio/Video, IN/OUT
SCART male (21-pin) > 3 RCA male



- 2.00 m ● 50364

SCART Adapter, IN/OUT

with SCART Passthrough
SCART male (21-pin) >
SCART female (21-pin) +
3x RCA female >
Mini-DIN 4 female (S-Video)



- 50312

SCART male (21-pin) >
3x RCA female +
Mini-DIN 4 female (S-Video)



- gold-plated
● 50499




- nickel-plated
● 50123

SCART male (21-pin) >
3x RCA female



- 50122

SCART Connector

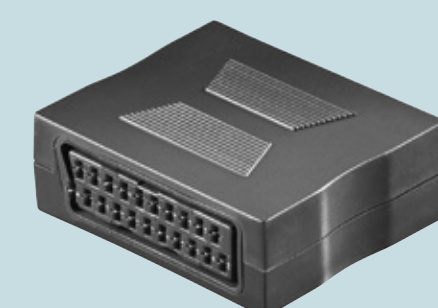

- 50771

SCART female (21-pin) > SCART female (21-pin)

- 2x SCART cables can be connected to each other with this coupling
- Suitable for analogue video recorders, TVs and receivers
- Robust housing and precision-fit connectors for a long service life
- SCART socket to SCART socket is ideal for extending SCART cables



AUDIO/VIDEO

SCART

AUDIO/VIDEO

XLR / MICROPHONE



3-PIN

4-PIN


5-PIN

XLR Cable

XLR Connection Cable

XLR male (3-pin) > XLR female (3-pin)

- Professional cable for connecting a microphone with XLR plug to an XLR plug input of e.g. stereo systems or amplifiers
- Ideal for music production equipment such as mixers, effects units, synthesizers, keyboards, electric pianos, electric guitars and guitar amplifiers
- For bridging larger distances without loss of quality
- For extending an existing audio cable
- Flexible PVC cable sheath
- Robust 3-pin metal plugs

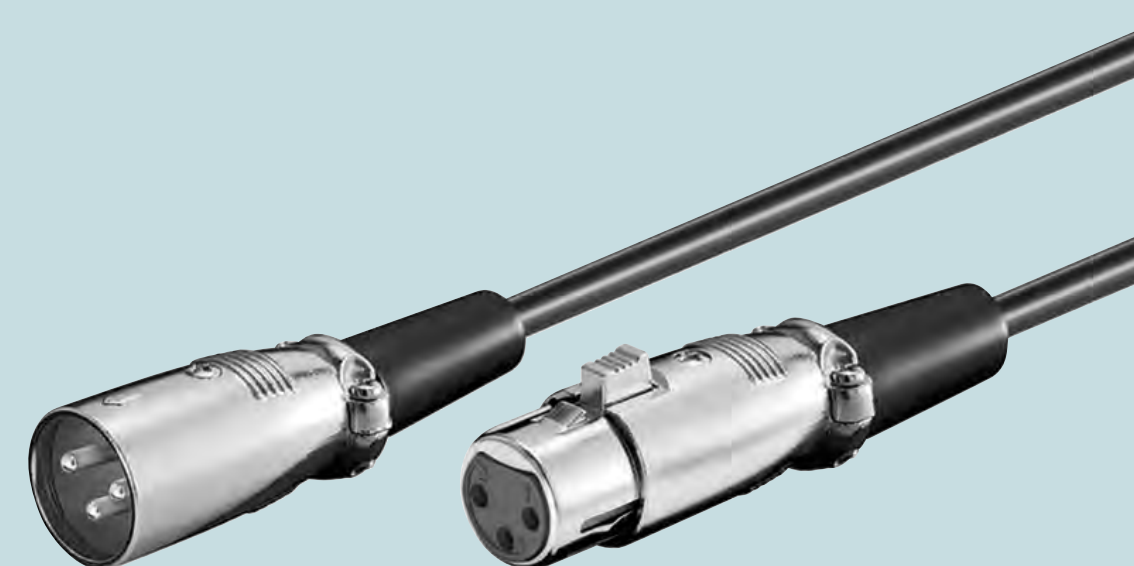

- 2.00 m ● 50705
- 6.00 m ● 50715

XLR Adapter, AUX Jack 6.35 mm

- Transmits high-quality audio signals
- For connecting an XLR audio or microphone cable to e.g. an e-guitar, e-piano, mixer, microphone or speaker with a 6.35 mm jack socket
- Standardised and precision-fit for minimum transmission resistance and clear sound
- High-quality, robust metal housing for durability
- Ideally suitable for hobbyists

STEREO

4-PIN

MONO

2-PIN

XLR Female to 6.35 mm Male

1x XLR socket (3 pin) >
1x 6.35 mm jack plug




27514



27451

XLR Male to 6.35 mm Male

1x XLR plug (3 pin) >
1x 6.35 mm jack plug

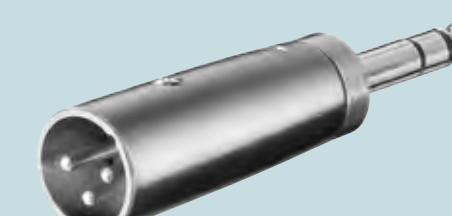


27515



27452


ADAPTERS

RCA Male to XLR Female
XLR female (3-pin) >
RCA male

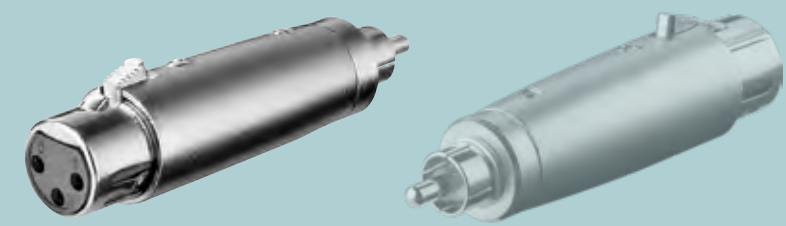


● 27455

RCA Male to XLR Male
XLR male (3-pin) >
RCA male

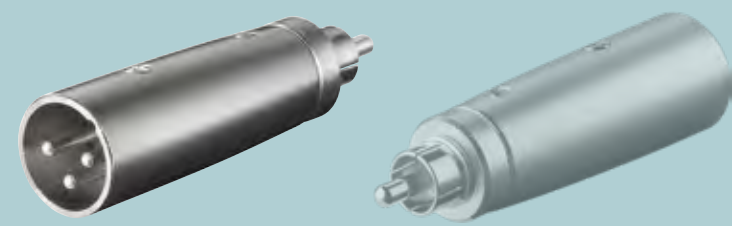


● 27456

RCA Female to XLR Female
XLR female (3-pin) >
RCA female

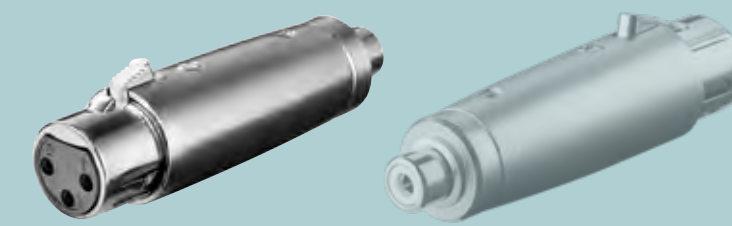

● 27457

RCA Female to XLR Male
XLR male (3-pin) >
RCA female

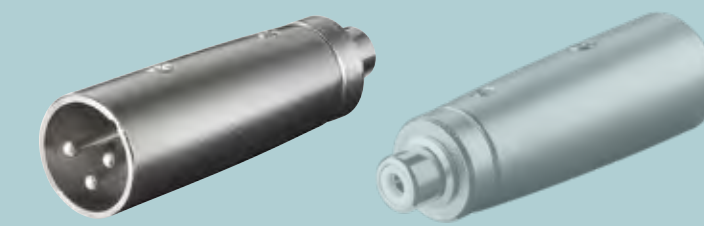


● 27458

XLR Coupling, Female to Female
XLR female (3-pin) >
XLR female (3-pin)



● 27459

XLR Coupling, Male to Male
XLR male (3-pin) >
XLR male (3-pin)

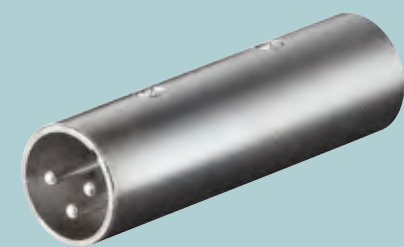

● 27460

XLR Coupling, 3 Pin
1x XLR socket (3-pin) >
1x 6.35 mm jack socket



● 27453

XLR Connector, 3 Pin
1x XLR plug (3-pin) >
1x 6.35 mm jack socket



● 27454

PLUGS & COUPLINGS

Microphone Chassis Plug

- For installation in audio equipment and connection of audio or microphone cables

XLR male (4-pin)
built-in plug (4-pin,
DMX)



● 11232 ¹

XLR male (5-pin)



gold-plated
contacts ● 11966

Built-in Microphone Socket with Lock

- For installation in audio equipment and connection of audio or microphone cables

XLR female (3-pin)
Microphone socket with
3-pin assignment



nickel-plated
contacts ● 11221
gold-plated
contacts ● 11973

XLR female (4-Pin)
Microphone socket with
4-pin assignment



gold-plated
contacts ● 11972

XLR female (5-Pin)
Microphone socket with
5-pin assignment



gold-plated
contacts ● 11971

Microphone Plug with Screw-On Strain Relief

XLR male (3-pin)
with gold-plated
contacts



● 11749

XLR male (3-pin)
with gold-plated
contacts



● 11954

XLR male (4-pin)



● 11776

XLR male (4-pin)



● 11681

XLR male (5-pin)
with gold-plated
contacts



● 11956

¹ Minimum order quantity 10 pieces



Microphone Coupling with Screw-On Strain Relief

XLR female (3-pin)
with locking mechanism



11755 ²

XLR female (3-pin)
with locking mechanism
and gold-plated contacts



11959

XLR female (3-pin)
with locking mechanism



11223

XLR female (3-pin)
with locking mechanism



11680

XLR female (4-pin)
with locking mechanism
and gold-plated contacts



11960

XLR female (5-pin)
with locking mechanism
and gold-plated contacts



11961

XLR female (4-pin)
with gold-plated
contacts



11230 ¹

XLR female (8-pin)
with gold-plated
contacts



11231 ¹

¹ Minimum order quantity 10 pieces
² Minimum order quantity 20 pieces



AUDIO/VIDEO

PA
(SPEAKON)

PA Loudspeaker Plug

screw connection, 4-pole

- Ideal for cable diameters up to 14.5 mm and for single wire diameters up to max. 3.0 mm
- PA loudspeaker plug with robust housing for durability



● 50834¹

screw connection and bend protection, 4-pole

- Ideal for cable diameters up to 14.5 mm




● 50835

PA Loudspeaker Jack

solder contacts and bend protection, 4-pole


- Ideal for cable diameters up to 14.5 mm and for single wire diameters up to max. 3.0 mm

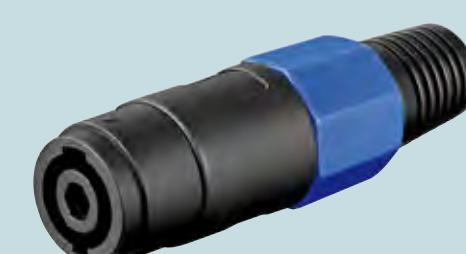

● 50836³

with solder contacts, angular plate, 4-pole

- Chassis connector for built-in installation
- Ideal for a conductor cross-section of 0.75 mm² - 2.5 mm²

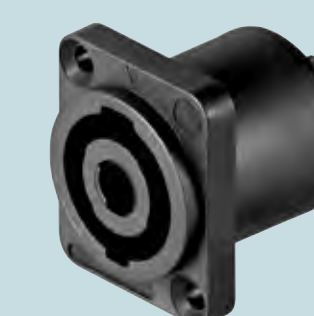

● 50837¹

¹ Minimum order quantity 10 pieces
³ Minimum order quantity 5 pieces

DIN Cable



DIN Audio Connector Cable
 DIN male 180° (5-pin) > DIN male 180° (5-pin)

1.50 m ● 50020

DIN Cable Adapter



**Audio Cable Adapter,
 DIN Female to Stereo RCA Male**
 DIN female 180° (5-pin) > 2 RCA male (audio left/right)

0.20 m ● 50004



**Audio Cable Adapter,
 DIN Male to Stereo RCA Female**
 DIN male 180° (5-pin) > 2 RCA female (audio left/right)

0.20 m ● 50002



**Video Cable Adapter,
 S-Video to Composite**
 Mini-DIN 4 male (S-Video) > RCA female

0.20 m ● 60845

AUDIO/VIDEO

DIN



Simply. All. You need.

mygoobay.com

AUDIO & VIDEO | 2025

Please refer to order-codes when placing an order. Illustration and packaging similar.
Changes and errors excepted. Other products on request.

Goobay®
by Wentronic GmbH
Pillmannstraße 12
38112 Braunschweig
Germany