



Construction

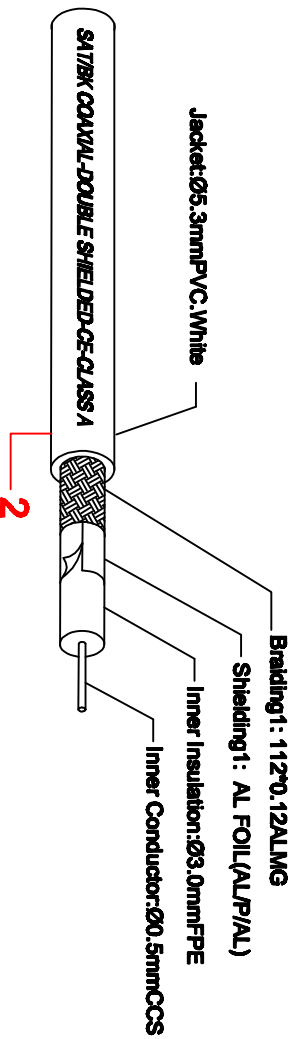

Wiring Method



F QUICK plug

1. dimensions As shown
2. Insulation resistance≥100 up to 500V=
3. dielectric strength 2 KV 50Hz 2 sec.
4. TESTING: 100% OPEN AND SHORT AND MISWIRE TEST.
5. 100% RoHS COMPLIANT.

No	Item	Length	Packaging
50747	BQF 0150	1.5m	1/10/80/180
50748	BQF 0250	2.5m	1/10/80/120
50752	BQF 0350	3.5m	1/10/40/80
50749	BQF 0500	5.0m	1/10/30/80

4	Copper coil	φ4.5mm H:3mm	2PCS
3	WOLDED1	PVC 4SP White	2*10g
2	CABLE	φ5.3 RG59 COAXIAL CABLE White(According to the chart)	L
1	CONNECTOR81	F QUICK Plug (Nickel plating 100% Shielded)	2set
NO	Item Name	SPEC	QTY
Edition	WEC/000	Scale	
Designed by	ming hong	Item Name	F QUICK PLUG TO F QUICK PLUG COAXIAL CABLE
Checked by		Item NO	BQF series cable
Approved by		Unit:	MM
Date	11.28.2013		