
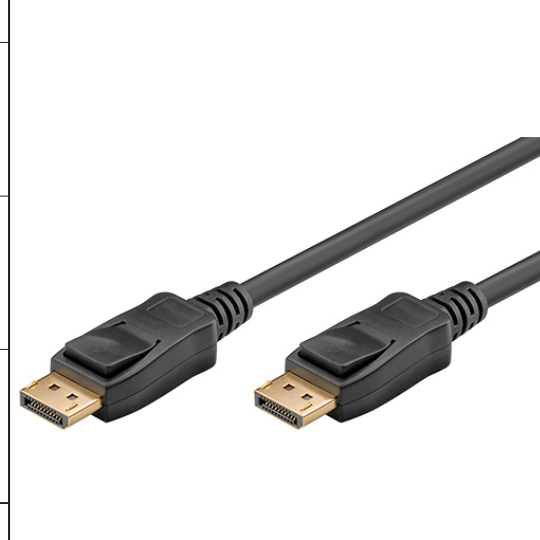
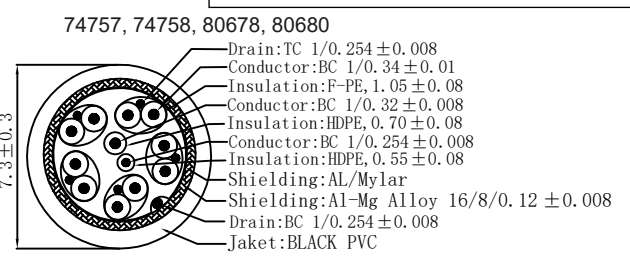


Art.-Nr. Item No.	Beschreibung Description	Länge Length (L)
74755	DP 2.x Kabel 54Gb STD 0100 1,0m sw	1000 ± 30 mm
80673	RT DP 2.x Kabel 54Gb STD 0100 1,0m sw	1000 ± 30 mm
74756	DP 2.x Kabel 54Gb STD 0200 2,0m sw	2000 ± 30 mm
80677	RT DP 2.x Kabel 54Gb STD 0200 2,0m sw	2000 ± 30 mm
74757	DP 2.x Kabel 54Gb STD 0300 3,0m sw	3000 ± 50 mm
80678	RT DP 2.x Kabel 54Gb STD 0300 3,0m sw	3000 ± 50 mm
74758	DP 2.x Kabel 54Gb STD 0500 5,0m sw	5000 ± 70 mm
80680	RT DP 2.x Kabel 54Gb STD 0500 5,0m sw	5000 ± 70 mm

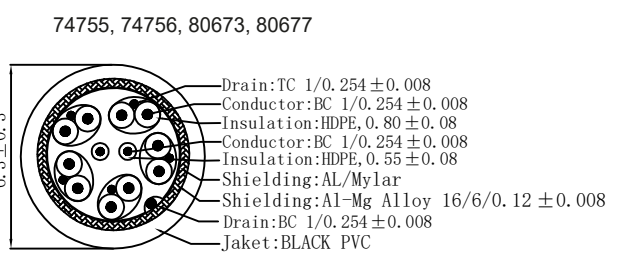

DisplayPort™ Verbindungskabel 2.1

- hochauflösende UHD-Signalübertragung mit bis zu 10K @ 30 Hz (7760p)
- max. Übertragungsrate von bis zu 54 Gbit/s
- mit Staub-Schutzkappe

Anschlüsse: 2x DisplayPort™-Stecker
 Kontakte: vergoldet
 Kabeltyp: Rundkabel
 Material Kabelmantel: PVC, schwarz
 Außendurchmesser Kabel: 6,3 ± 0,3 mm (74755, 74756)
 7,3 ± 0,3 mm (74757, 74758)

Max. Datenübertragungsrate: 54 Gbit/s
 Unterstützte Videostandards: 10K@60Hz (10240x4320)
 8K@120Hz (7680x4320)
 4K@144Hz (3840x2160)
 Full HD @240Hz (1920x1080)

Isolationswiderstand: 300 V=, 10 MΩ min.

DisplayPort™ Connector Cable 2.1

- High-resolution signal transmission with up to 10K @ 30 Hz (7760p)
- max. transmission rate of up to 54 Gbit/s
- with protective dust cap

Connections: 2x DisplayPort™ plug
 Contacts: gold-plated
 Cable type: round cable
 Material Cable Jacket: PVC, black
 Outer diameter cable jacket: 6.3 ± 0.3 mm (74755, 74756)
 7.3 ± 0.3 mm (74757, 74758)

Max. Data transmission rate: 54 Gbit/s
 Supported video standards: 10K@60Hz (10240x4320)
 8K@120Hz (7680x4320)
 4K@144Hz (3840x2160)
 Full HD @240Hz (1920x1080)

Insulation resistance: 300 V=, 10 MΩ min.

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	23.09.2024	fw	
08.04.2026	ir	gepr.:	23.09.2024	fw	
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change				74755, 74756, 74757, 74758, 80673, 80677, 80678, 80680	