
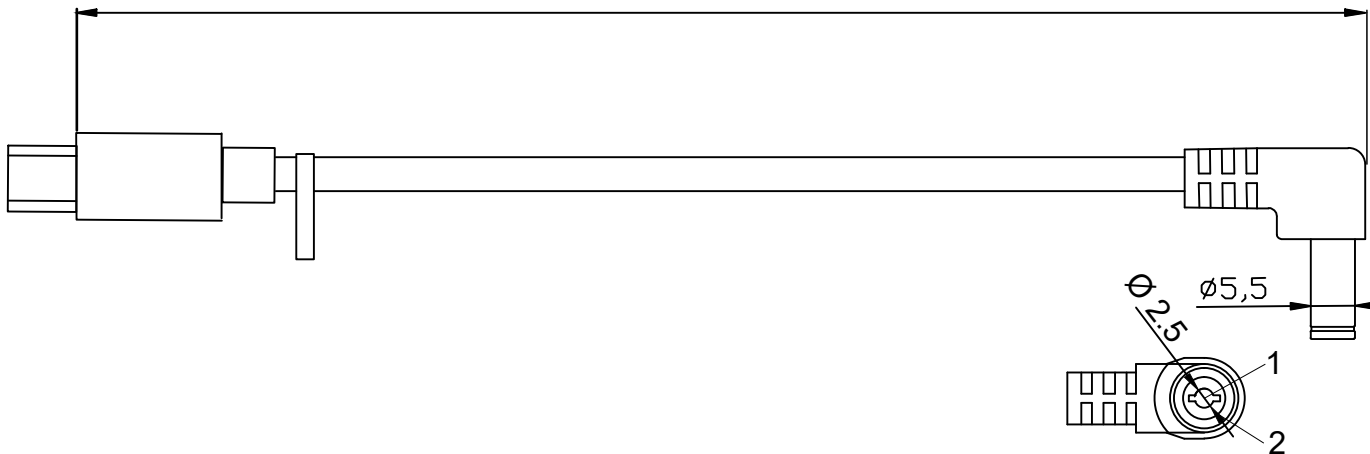


	1	2	3	4	5	6	7	8	9	10	11	12	13	14																
A	Kabelquerschnitt / Cable cross-section  Innenleiter / Conductor: 30/0.12BC Isolierung / Insulation: PVC rot schwarz / red black Kabelmantel / Jacket: Ø 3.5 ± 0.20 mm schwarz black Schaltplan / Wiring diagram <table><tr><td>P1</td><td>WIRE TYPE</td><td>P2</td><td>Farbe color</td></tr><tr><td>1pin</td><td></td><td>1pin</td><td>rot red</td></tr><tr><td>4pin</td><td></td><td>2pin</td><td>schwarz black</td></tr></table>				P1	WIRE TYPE	P2	Farbe color	1pin		1pin	rot red	4pin		2pin	schwarz black	Artikel-Nr. / Item No. 78971 78972 78973		Länge / Length 500 ± 20 mm 1000 ± 20 mm 1500 ± 20 mm								A			
P1					WIRE TYPE	P2	Farbe color																							
1pin						1pin	rot red																							
4pin						2pin	schwarz black																							
B					B																									
C					C																									
D					D																									
E													E																	
F					USB-DC-Kabel 5,5 x 2,1 mm - mit platzsparendem DC-Winkelstecker Anschlüsse: USB-3.1-Stecker (Typ C) DC-Stecker (5,50 x 2,10 mm) max. Leistung: 15 W Kabeltyp: Rundkabel Material Kontakte: vernickelt Material Innenleiter: CU (Kupfer) Material Kabelmantel: PVC				USB-DC Cable 5.5 x 2.1 mm - for connecting devices with coaxial connection Connections: USB-3.1 plug (Type C) DC plug (5.50 x 2.10 mm) max. power output: 15 W Cable Type: round cable Material contact: nickle plated Material conductor : CU (copper) Material cable: PVC				F																	
G													G																	
H													H																	
I					Änderungen <table><tr><td>Datum</td><td>Name</td><td>gez.:</td><td>Datum</td><td>Name</td></tr><tr><td>12.09.2025</td><td>ir</td><td>gepr.:</td><td>14.07.2025</td><td>ZK</td></tr><tr><td></td><td></td><td>Norm:</td><td></td><td></td></tr></table>				Datum	Name	gez.:	Datum	Name	12.09.2025	ir	gepr.:	14.07.2025	ZK			Norm:							DC-AKB USB-C/DC 5,5 * 2,1MM X,XXM 		
Datum	Name	gez.:	Datum	Name																										
12.09.2025	ir	gepr.:	14.07.2025	ZK																										
		Norm:																												
J					Änderungen vorbehalten / Subject to change				Zeichnungs-Nr.: 78971, 78972, 78973				von 1		J															
	1	2	3	4	5	6	7	8	9	10	11	12	13	14																