

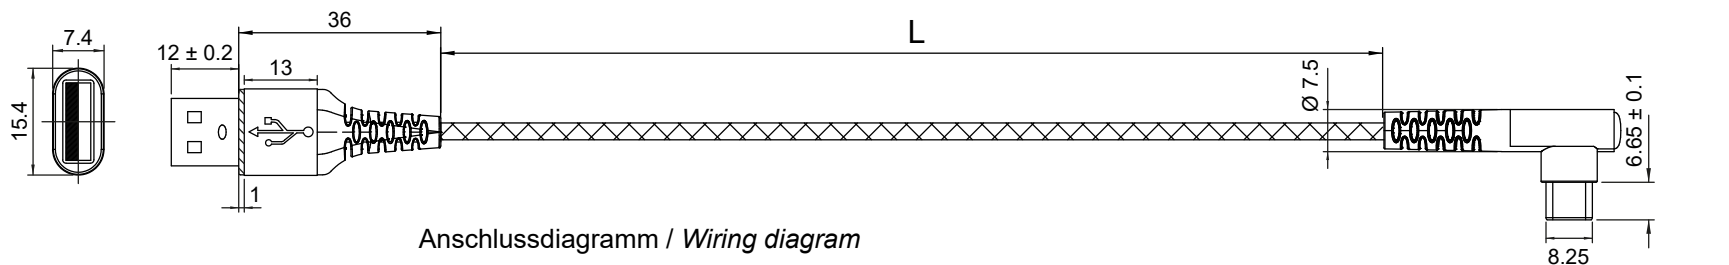


1	2	3	4	5	6	7	8	9	10	11	12	13	14
Artikel-Nr. / Item No.		Beschreibung / Description			Länge / Length		Kabelaufbau / Cable structure						
64655		DAT USB-A/C 2.0 90° 0,5m textil sw/si PL			500 ± 30 mm		4C * 0.59 m #24 * 2C + #30 * 2C + AB; shielding 64/0.06						
64656		DAT USB-A/C 2.0 90° 1,0m textil sw/si PL			1000 ± 30 mm		4C * 1.09 m #24 * 2C + #30 * 2C + AB; shielding 64/0.06						
64657		DAT USB-A/C 2.0 90° 2,0m textil sw/si PL			2000 ± 30 mm		4C * 2.09 m #24 * 2C + #30 * 2C + AB; shielding 64/0.08						

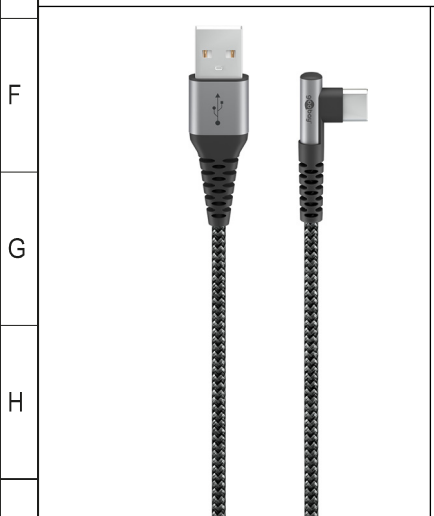

Anschlussdiagramm / Wiring diagram

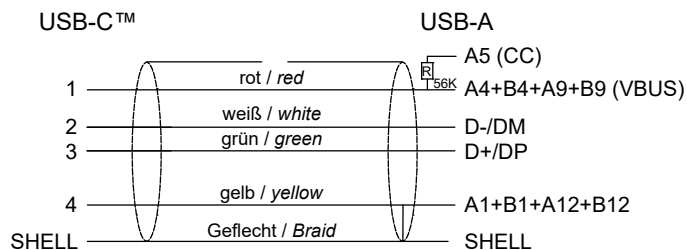

USB-C™-auf-USB-A-Textilkabel mit Metallsteckern (spacegrau/silber), 90°

- ermöglicht schnelles Laden mit maximal 60 W (20 V, 3,0 A)
- gewinkelter Stecker vermeidet Kabelbruch
- mit Knickschutz (auf über 10.000 Biegezyklen ausgelegt)

Anschlüsse: USB-C™-Stecker, USB-A-Stecker
 Max. Übertragungsrate: 0,48 Gbit/s
 Durchmesser Kabelmantel: ca. 3,3 mm

USB-C™ to USB-A Textile Cable with Metal Plugs (Space Grey/Silver), 90°

- enables fast charging with a maximum of 60 W (20 V, 3.0 A)
- angled plug prevents cable breakage
- with bend protection (designed for over 10,000 bending cycles)

Connections: USB-C™ plug, USB-A plug
 Max. transmission rate: 0.48 Gbit/s
 Cable sheath diameter: approx. 3.3 mm

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	10.05.2023	rs	1/1
		gepr.:	10.05.2023	aw	
		Norm:		Zeichnungs-Nr.:	von
Änderungen vorbehalten / Subject to change				64655, 64656, 64657	

