
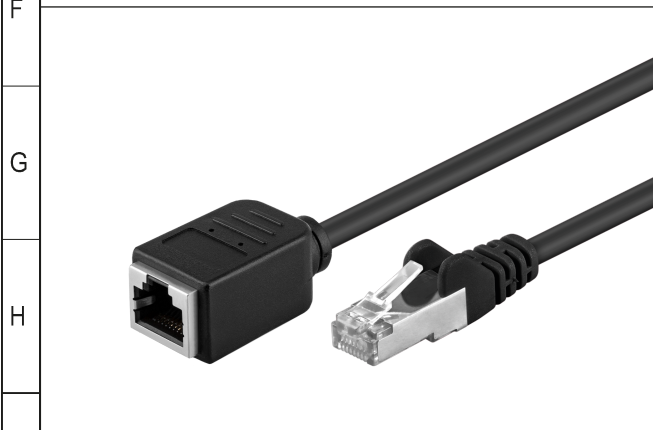


1	2	3	4	5	6	7	8	9	10	11	12	13	14
Artikel-Nr. / Item No.		Beschreibung / Description			Länge / Length (L)		Anschlussdiagramm / Wiring diagram						
73386		CAT 5-0050 F/UTP EXTENSION (CU) BLACK 0,5m			500 ± 15 mm		<p>P1 P2</p> <p>1 1 weiß-orange / white orange 2 2 orange / orange 3 3 weiß-grün / white green 4 4 grün / green 5 5 blau / blue 6 6 weiß-blau / white blue 7 7 weiß-braun / white brown 8 8 braun / brown</p> <p>SHELL SHELL</p>						
91886		CAT 5-0100 F/UTP EXTENSION (CU) BLACK 1m			1000 ± 30 mm								
73387		CAT 5-0150 F/UTP EXTENSION (CU) BLACK 1,5m			1500 ± 30 mm								
73388		CAT 5-0200 F/UTP EXTENSION (CU) BLACK 2m			2000 ± 30 mm								
91883		CAT 5-0300 F/UTP EXTENSION (CU) BLACK 3m			3000 ± 50 mm								
91884		CAT 5-0500 F/UTP EXTENSION (CU) BLACK 5m			5000 ± 200 mm								
91885		CAT 5-1000 F/UTP EXTENSION (CU) BLACK 10m			10000 ± 200 mm								
73390		CAT 5-1500 F/UTP EXTENSION (CU) BLACK 15m			15000 ± 300 mm								

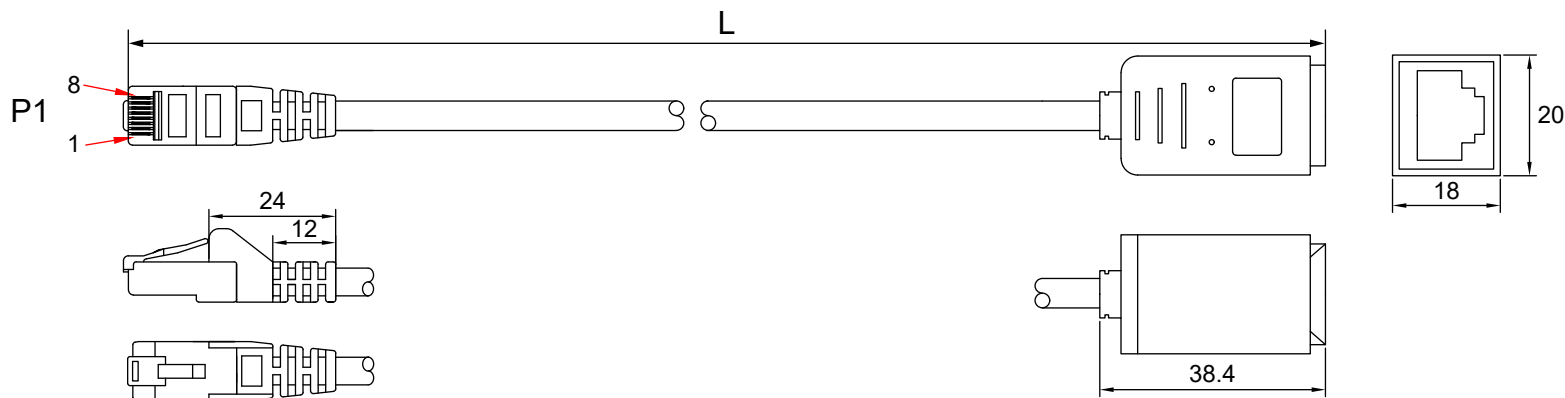

CAT 5e Verlängerungskabel, F/UTP


- konfektionierte, geschirmte LAN-Kabel-Verlängerung mit RJ45-Anschlüssen
- vollständige Folienschirmung (F/UTP)
- hochwertiger Kupferleiter (CU) und vergoldete Kontaktflächen
- Netzwerkstecker: Paarfolge nach EIA/TIA 568B, Belegung 1:1

Anschlüsse: RJ45-Stecker (8P8C), RJ45-Buchse (8P8C)
 Material Mantel: PVC
 AD Mantel: 5,2 ± 0,2 mm
 Spezifikation: CAT 5e
 Schirmungsklasse: F/UTP
 Max. Bandbreite: 100 MHz
 AWG: 26/7 (stranded)
 Betriebstemperatur: -10 °C ~ +60 °C

CAT 5e Extension Cable F/UTP

- prewired, shielded LAN cable extension with RJ45 plugs
- foil screen (F/UTP)
- high-quality copper conductor (CU) and gold-plated contacts
- network connector: pair sequence according to EIA/TIA 568B, pinout: 1:1

Connectors: RJ45 male (8P8C), RJ45 female (8P8C)
 Material cable jacket: PVC
 OD cable jacket: 5.2 ± 0.2 mm
 Specification: CAT 5e
 Shielding class: F/UTP
 Max. bandwidth: 100 MHz
 AWG: 26/7 (stranded)
 Operating temperature: -10 °C ~ +60 °C

Änderungen			Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.:	03.07.2023	ir	CAT X-XXXX F/UTP EXTENSION (CU) BLACK Xm 	1/1 von
23.01.2024	ir	gepr.:	03.07.2023	anw		
		Norm:				
Änderungen vorbehalten / Subject to change					Zeichnungs-Nr.:	